

Silicon Switching Diode

1N4148
or
1N4148-1


DO-35 Glass Package

Applications

Used in general purpose applications, where a controlled forward characteristic and fast switching speed are important.

Features

- Six sigma quality
- Metallurgically bonded
- BKC's Sigma Bond™ plating for problem free solderability
- LL-34/35 MELF SMD available
- Hermetic Glass Body
- Available up to JANTXV-1 levels
- "S" level screening available to Source Control Drawings-

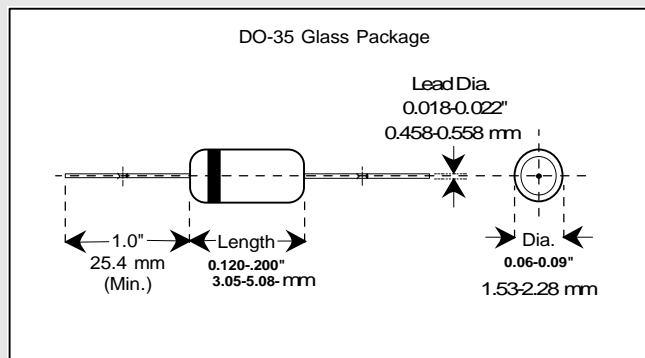

Maximum Ratings	Symbol	Value	Unit	
Peak Inverse Voltage	PIV	100 (Min).	Volts	
Average Rectified Current	I _{avg}	200	mAmps	
Continuous Forward Current	I _{Fdc}	300	mAmps	
Peak Surge Current (t _{peak} = 1 sec.)	I _{peak}	1.0	Amp	
BKC Power Dissipation T _L =50 °C, L = 3/8" from body	P _{tot}	500	mWatts	
Operating Temperature Range	T _{Op}	-65 to +200	°C	
Storage Temperature Range	T _{St}	-65 to +200	°C	
Electrical Characteristics @ 25 °C*	Symbol	Minimum	Maximum	Unit
Forward Voltage Drop @ I _F = 10 mA	V _F	***	1.00	Volts
Breakdown Voltage @ I _R = 5 μA	PIV	75		Volts
Breakdown Voltage @ I _R = 100 μA	PIV	100		Volts
Reverse Leakage Current @ V _R = 75 V	I _R		5 (100 @ 150 °C)	μA
Capacitance @ V _R = 0 V, f = 1mHz	C _T		4.0	pF
Reverse Recovery time (note 1)	t _{rr}		4.0	nSecs

Note 1: Per Method 4031-A with I_F = 10 mA, V_R = 6 V, R_L = 100 Ohms. * UNLESS OTHERWISE SPECIFIED



6 Lake Street - Lawrence, MA 01841

Tel: 978-681-0392 - Fax: 978-681-9135



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.