


Preliminary Specifications

-100 Volt, 0.30 Ohm SFET

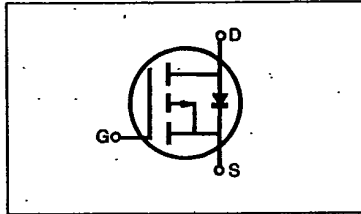

PRODUCT SUMMARY

Part Number	V _{DS}	R _{DS(on)}	I _D
IRF/IRFP9130, IRF9530	-100V	0.30Ω	-12A
IRF/IRFP9131, IRF9531	-60V	0.30Ω	-12A
IRF/IRFP9132, IRF9532	-100V	0.40Ω	-10A
IRF/IRFP9133, IRF9533	-60V	0.40Ω	-10A

FEATURES

- Low R_{DS(on)}
- Improved inductive ruggedness
- Fast switching times
- Rugged polysilicon gate cell structure
- Low input capacitance
- Extended safe operating area
- Improved high temperature reliability

PACKAGE STYLE

Package Type	Part Number
TO-3	IRF9130/9131/9132/9133
TO-3P	IRFP9130/9131/9132/9133
TO-220	IRF9530/9531/9532/9533

MAXIMUM RATINGS

Characteristic	Symbol	IRF/IRFP				Unit
		9130 9530	9131 9531	9132 9532	9133 9533	
Drain-Source Voltage (1)	V _{DSS}	-100	-60	-100	-60	V _{dc}
Drain-Gate Voltage (R _{GS} =1.0MΩ) (1)	V _{DGR}	-100	-60	-100	-60	V _{dc}
Gate-Source Voltage	V _{GS}	±20				V _{dc}
Continuous Drain Current T _C =25°C	I _D	-12	-12	-10	-10	A _{dc}
Continuous Drain Current T _C =100°C	I _D	-7.5	-7.5	-6.5	-6.5	A _{dc}
Drain Current—Pulsed (3)	I _{DM}	-48	-48	-40	-40	A _{dc}
Gate Current—Pulsed	I _{GM}	±1.5				A _{dc}
Total Power Dissipation @ T _C =25°C Derate above 25°C	P _D	75 0.6				Watts W/°C
Operating and Storage Junction Temperature Rany	T _J , T _{stg}	-55 to 150				°C
Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5 seconds	T _L	300				°C

Notes: (1) T_J=25°C to 150°C
 (2) Pulse test: Pulse width≤300μs, Duty Cycle≤2%
 (3) Repetitive rating: Pulse width limited by max. junction temperature

IRF9130/9131/9132/9133
IRFP9130/9131/9132/9133
IRF9530/9531/9532/9533

P-CHANNEL
POWER MOSFETS

98 DE 7964142 0005406 9

T-39-21

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV_{DSS}	IRF9130/2 IRFP9130/2 IRF9530/2	-100	—	—	V	$V_{GS}=0V$
		IRF9131/3 IRFP9131/3 IRF9531/3	-60	—	—	V	$I_D=-250\mu A$
Gate Threshold Voltage	$V_{GS(th)}$	ALL	-2.0	—	-4.0	V	$V_{DS}=V_{GS}$, $I_D=-250\mu A$
Gate-Source Leakage Forward	I_{GSS}	ALL	—	—	-100	nA	$V_{GS}=-20V$
Gate-Source Leakage Reverse	I_{GSS}	ALL	—	—	100	nA	$V_{GS}=20V$
Zero Gate Voltage Drain Current	I_{DSS}	ALL	—	—	-250	μA	$V_{DS}=\text{Max. Rating}$, $V_{GS}=0V$
			—	—	-1000	μA	$V_{DS}=\text{Max. Rating}\times 0.8$, $V_{GS}=0V$, $T_C=125^\circ\text{C}$
On-State Drain-Source Current (2)	$I_{D(on)}$	IRF9130/1 IRFP9130/1 IRF9530/1	-12	—	—	A	$V_{DS}>I_{D(on)}\times R_{DS(on) \text{ max.}}$, $V_{GS}=-10V$
		IRF9132/3 IRFP9132/3 IRF9532/3	-10	—	—	A	
Static Drain-Source On-State Resistance (2)	$R_{DS(on)}$	IRF9130/2 IRFP9132/2 IRF9530/2	—	—	0.30	Ω	$V_{GS}=-10V$, $I_D=-6.5A$
		IRF9131/3 IRFP9131/3 IRF9531/3	—	—	0.40	Ω	
Forward Transconductance (2)	g_{fs}	ALL	2.0	—	—	S	$V_{DS}>I_{D(on)}\times R_{DS(on) \text{ max.}}$, $I_D=-6.5A$
Input Capacitance	C_{iss}	ALL	—	—	700	pF	$V_{GS}=0V$, $V_{DS}=-25V$, $f=1.0\text{MHz}$
Output Capacitance	C_{oss}	ALL	—	—	450	pF	
Reverse Transfer Capacitance	C_{res}	ALL	—	—	200	pF	
Turn-On Delay Time	$t_{d(on)}$	ALL	—	—	60	ns	$V_{DD}=0.5BV_{DSS}$, $I_D=-6.5A$, $Z_\theta=50\Omega$ (MOSFET switching times are essentially independent of operating temperature.)
Rise Time	T_r	ALL	—	—	140	ns	
Turn-Off Delay Time	$t_{d(off)}$	ALL	—	—	140	ns	
Fall Time	t_f	ALL	—	—	140	ns	
Total Gate Charge (Gate-Source Plus Gate-Drain)	Q_g	ALL	—	—	45	nC	$V_{GS}=-15V$, $I_D=-15A$, $V_{DS}=0.8 \text{ Max.}$ Rating (Gate charge is essentially independent of operating temperature.)
Gate-Source Charge	Q_{gs}	ALL	—	—	20	nC	
Gate-Drain ("Miller") Charge	Q_{gd}	ALL	—	—	25	nC	

THERMAL RESISTANCE

Junction-to-Case	R_{thJC}	ALL	—	—	1.67	K/W	Mounting surface flat, smooth, and greased
Case-to-Sink	R_{thCS}	ALL	—	1.0	—	K/W	
Junction-to-Ambient	R_{thJA}	IRFPXXXX IRF95XX	—	—	80	K/W	Free Air Operation
		IRF91XX	—	—	30	K/W	

- Notes: (1) $T_J=25^\circ\text{C}$ to 150°C
(2) Pulse test: Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
(3) Repetitive rating: Pulse width limited by max. junction temperature

IRF9130/9131/9132/9133
IRFP9130/9131/9132/9133
IRF9530/9531/9532/9533

98


DE 7964142 0005407 0

P-CHANNEL





POWER MOSFETS

T-39-21

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Continuous Source Current (Body Diode)	I_S	IRF9130/1 IRFP9130/1 IRF9530/1	—	—	-12	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier 
		IRF9132/3 IRFP9132/3 IRF9532/3	—	—	-10	A	
Pulse Source Current (Body Diode) (3)	I_{SM}	IRF9130/1 IRFP9130/1 IRF9530/1	—	—	-48	A	
		IRF9132/3 IRFP9132/3 IRF9532/3	—	—	-40	A	
Diode Forward Voltage (2)	V_{SD}	IRF9130/1 IRFP9130/1 IRF9530/1	—	—	-6.3	V	$T_C=25^\circ\text{C}$, $I_S=-12\text{A}$, $V_{GS}=0\text{V}$
		IRF9132/3 IRFP9132/3 IRF9532/3	—	—	-6.0	V	$T_C=25^\circ\text{C}$, $I_S=-10\text{A}$, $V_{GS}=0\text{V}$
Reverse Recovery Time	t_{rr}	ALL	—	—	—	ns	$T_J=150^\circ\text{C}$, $I_F=-12\text{A}$, $dI_F/dt=100\text{A}/\mu\text{s}$

Notes: (1) $T_J=25^\circ\text{C}$ to 150°C (2) Pulse test: Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
 (3) Repetitive rating: Pulse width limited by max. junction temperature

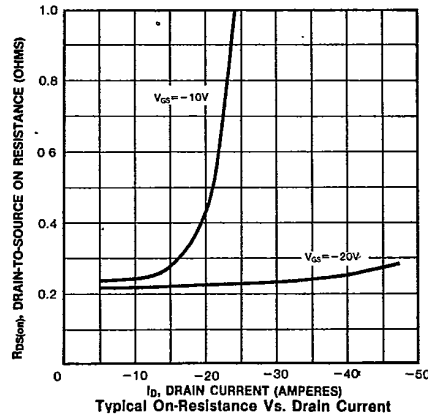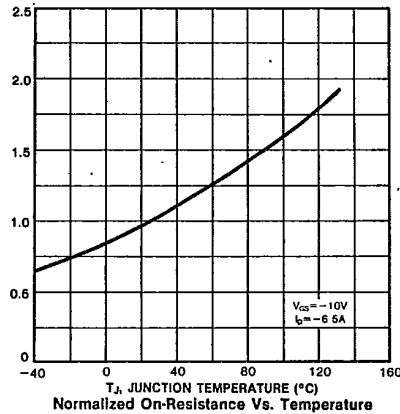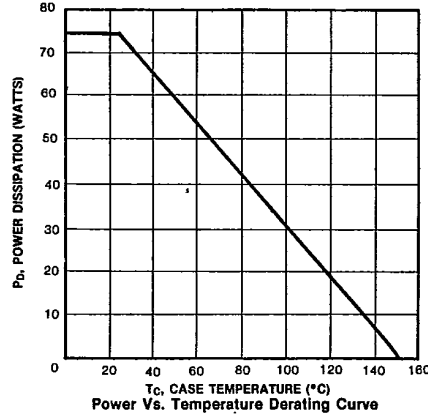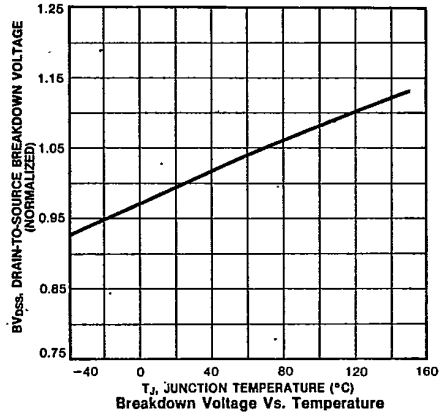


IRF9140/9141/9142/9143
IRFP9140/9141/9142/9143
IRF9540/9541/9542/9543

P-CHANNEL
POWER MOSFETS

Preliminary Specifications

- 100 Volt, 0.2 Ohm SFET

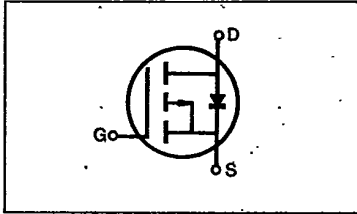

FEATURES

- Low $R_{DS(on)}$
- Improved inductive ruggedness
- Fast switching times
- Rugged polysilicon gate cell structure
- Low input capacitance
- Extended safe operating area
- Improved high temperature reliability

PRODUCT SUMMARY

Part Number	V_{DS}	$R_{DS(on)}$	I_D
IRF/IRFP9140, IRF9540	-100V	0.2 Ω	-19A
IRF/IRFP9141, IRF9541	-60V	0.2 Ω	-19A
IRF/IRFP9142, IRF9542	-100V	0.3 Ω	-15A
IRF/IRFP9143, IRF9543	-60V	0.3 Ω	-15A

PACKAGE STYLE

Package Type	Part Number
TO-3	IRF9140/9141/9142/9143
TO-3P	IRFP9140/9141/9142/9143
TO-220	IRF9540/9541/9542/9543

MAXIMUM RATINGS

Characteristic	Symbol	IRF/IRFP				Unit
		9140 9540	9141 9541	9142 9542	9143 9543	
Drain-Source Voltage (1)	V_{DSS}	-100	-60	-100	-60	Vdc
Drain-Gate Voltage ($R_{GS}=1.0M\Omega$) (1)	V_{DGR}	-100	-60	-100	-60	Vdc
Gate-Source Voltage	V_{GS}	± 20				Vdc
Continuous Drain Current $T_C=25^\circ C$	I_D	-19	-19	-15	-15	Adc
Continuous Drain Current $T_C=100^\circ C$	I_D	-12	-12	-10	-10	Adc
Drain Current—Pulsed (3)	I_{DM}	-76	-76	-60	-60	Adc
Gate Current—Pulsed	I_{GM}	± 1.5				Adc
Total Power Dissipation @ $T_C=25^\circ C$ Derate above $25^\circ C$	P_D	125 1.0				Watts W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to 150				$^\circ C$
Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5 seconds	T_L	300				$^\circ C$

- Notes: (1) $T_J=25^\circ C$ to $150^\circ C$
(2) Pulse test: Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
(3) Repetitive rating: Pulse width limited by max. junction temperature



SAMSUNG SEMICONDUCTOR

IRF9140/9141/9142/9143
IRFP9140/9141/9142/9143
IRF9540/9541/9542/9543

P-CHANNEL
POWER MOSFETS

T-39-23

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV_{DSS}	IRF9140/2 IRFP9140/2 IRF9540/2	-100	—	—	V	$V_{GS}=0V$
		IRF9141/3 IRFP9141/2 IRF9541/3	-60	—	—	V	$I_D=-250\mu A$
Gate Threshold Voltage	$V_{GS(th)}$	ALL	-2.0	—	-4.0	V	$V_{DS}=V_{GS}$, $I_D=-250\mu A$
Gate-Source Leakage Forward	I_{GSS}	ALL	—	—	-100	nA	$V_{GS}=-20V$
Gate-Source Leakage Reverse	I_{GSS}	ALL	—	—	100	nA	$V_{GS}=20V$
Zero Gate Voltage Drain Current	I_{DSS}	ALL	—	—	-250	μA	$V_{DS}=\text{Max. Rating}$, $V_{GS}=0V$
		—	—	—	-1000	μA	$V_{DS}=\text{Max. Rating}\times 0.8$, $V_{GS}=0V$, $T_C=125^\circ\text{C}$
On-State Drain-Source Current(2)	$I_{D(on)}$	IRF9140/1 IRFP9140/1 IRF9540/1	-19	—	—	A	$V_{DS}>I_{D(on)}\times R_{DS(on) \text{ max.}}$, $V_{GS}=-10V$
		IRF9142/3 IRFP9142/3 IRF9542/3	-15	—	—	A	
Static Drain-Source On-State Resistance (2)	$R_{DS(on)}$	IRF9140/1 IRFP9140/1 IRF9540/1	—	—	0.2	Ω	$V_{GS}=-10V$, $I_D=-10A$
		IRF9142/3 IRFP9142/3 IRF9542/3	—	—	0.3	Ω	
Forward Transconductance (2)	g_{fs}	ALL	5.0	—	—		$V_{DS}>I_{D(on)}\times R_{DS(on) \text{ max.}}$, $I_D=-10A$
Input Capacitance	C_{iss}	ALL	—	—	1300	pF	$V_{GS}=0V$, $V_{DS}=-25V$, $f=1.0\text{MHz}$
Output Capacitance	C_{oss}	ALL	—	—	700	pF	
Reverse Transfer Capacitance	C_{rss}	ALL	—	—	400	pF	
Turn-On Delay Time	$t_{d(on)}$	ALL	—	—	30	ns	$V_{DD}=0.5BV_{DSS}$, $I_D=-10A$, $Z_\theta=4.7\Omega$, (MOSFET switching times are essentially independent of operating temperature.)
Rise Time	t_r	ALL	—	—	15	ns	
Turn-Off Delay Time	$t_{d(off)}$	ALL	—	—	20	ns	
Fall Time	t_f	ALL	—	—	12	ns	
Total Gate Charge (Gate-Source Plus Gate-Drain)	Q_0	ALL	—	—	90	nC	$V_{GS}=-15V$, $I_D=-24A$, $V_{DS}=0.8 \text{ Max.}$ Rating (Gate charge is essentially independent of operating temperature.)
Gate-Source Charge	Q_{gs}	ALL	—	—	30	nC	
Gate-Drain ("Miller") Charge	Q_{gd}	ALL	—	—	60	nC	

THERMAL RESISTANCE

Junction-to-Case	R_{thJC}	ALL	—	—	1.0	K/W	Mounting surface flat, smooth, and greased
Case-to-Sink	R_{thCS}	ALL	—	0.1	—	K/W	
Junction-to-Ambient	R_{thJA}	IRFPXXXX	—	—	80	K/W	Free Air Operation
		IRF95XX	—	—	30	K/W	

- Notes: (1) $T_J=25^\circ\text{C}$ to 150°C
(2) Pulse test: Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
(3) Repetitive rating: Pulse width limited by max. junction temperature




SAMSUNG SEMICONDUCTOR

IRF9140/9141/9142/9143
IRFP9140/9141/9142/9143
IRF9540/9541/9542/9543





P-CHANNEL
POWER MOSFETS

T-39-23

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Continuous Source Current (Body Diode)	I _S	IRF9140/1 IRFP9140/1 IRF9540/1	—	—	-19	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier 
		IRF9142/3 IRFP9142/3 IRF9542/3	—	—	-15	A	
		IRF9140/1 IRFP9140/1 IRF9540/1	—	—	-76	A	
Pulse Source Current (Body Diode) (3)	I _{SM}	IRF9140/1 IRFP9140/1 IRF9540/1	—	—	-76	A	
		IRF9142/3 IRFP9142/3 IRF9542/3	—	—	-60	A	
		IRF9140/1 IRFP9140/1 IRF9540/1	—	—	-4.2	V	
Diode Forward Voltage (2)	V _{SD}	IRF9140/1 IRFP9140/1 IRF9540/1	—	—	-4.2	V	T _C =25°C, I _S =-19A, V _{GS} =0V
		IRF9142/3 IRFP9142/3 IRF9542/3	—	—	-4.0	V	T _C =25°C, I _S =-15A, V _{GS} =0V
Reverse Recovery Time	t _{rr}	ALL	—	—	—	ns	T _J =150°C, I _F =-19A, dI _F /dt=100A/μs

Notes: (1) T_J=25°C to 150°C (2) Pulse test: Pulse width≤300μs, Duty Cycle≤2%
 (3) Repetitive rating: Pulse width limited by max. junction temperature

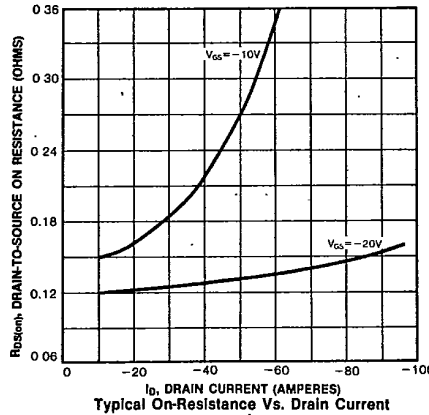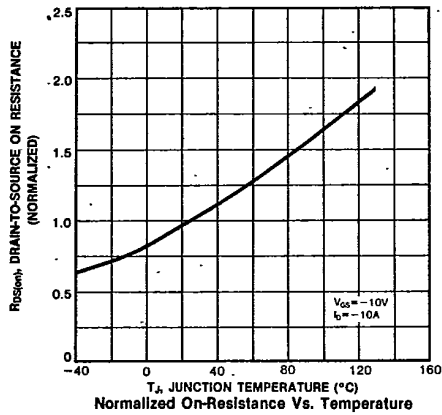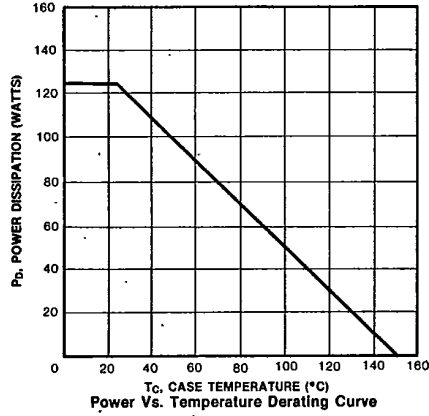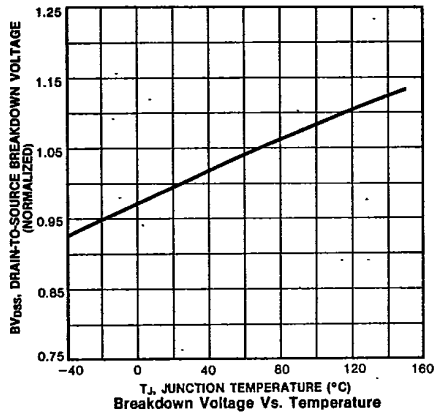

IRF9230/9231/9232/9233
 IRFP9230/9231/9232/9233
 IRF9630/9631/9632/9633


98 DE 7964142 0005417 3

**P-CHANNEL
 POWER MOSFETS**

Preliminary Specifications

T-39-21

- 200 Volt, 0.8 Ohm SFET

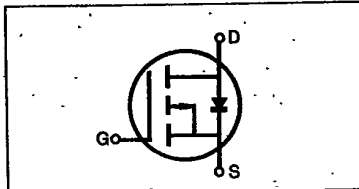

PRODUCT SUMMARY

Part Number	V _{DS}	R _{DS(on)}	I _D
IRF/IRFP9230, IRF9630	-200V	0.8Ω	-6.5A
IRF/IRFP9231, IRF9631	-150V	0.8Ω	-6.5A
IRF/IRFP9232, IRF9632	-200V	1.2Ω	-5.5A
IRF/IRFP9233, IRF9633	-150V	1.2Ω	-5.5A

7964142 SAMSUNG SEMICONDUCTOR INC

98D 05417 D

FEATURES

- Low R_{DS(on)}
- Improved inductive ruggedness
- Fast switching times
- Rugged polysilicon gate cell structure
- Low Input capacitance
- Extended safe operating area
- Improved high temperature reliability

PACKAGE STYLE

Package Type	Part Number
TO-3	IRF9230/9231/9232/9233
TO-3P	IRFP9230/9231/9232/9233
TO-220	IRF9630/9631/9632/9633

MAXIMUM RATINGS

Characteristic	Symbol	IRF/IRFP				Unit
		9230 9630	9231 9631	9232 9632	9233 9633	
Drain-Source Voltage (1)	V _{DSS}	-200	-150	-200	-150	Vdc
Drain-Gate Voltage (R _{GS} =1.0MΩ) (1)	V _{DGR}	-200	-150	-200	-150	Vdc
Gate-Source Voltage	V _{GS}	±20				Vdc
Continuous Drain Current T _C =25°C	I _D	-6.5	-6.5	-5.5	-5.5	Adc
Continuous Drain Current T _C =100°C	I _D	-4.0	-4.0	-3.5	-3.5	Adc
Drain Current—Pulsed (3)	I _{DM}	-26	-26	-22	-22	Adc
Gate Current—Pulsed	I _{GM}	±1.5				Adc
Total Power Dissipation @ T _C =25°C Derate above 25°C	P _D	75 0.6				Watts W/°C
Operating and Storage Junction Temperature Rangy	T _J , T _{stg}	-55 to 150				°C
Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5 seconds	T _L	300				°C

- Notes: (1) T_J=25°C to 150°C
 (2) Pulse test: Pulse width≤300μs, Duty Cycle≤2%
 (3) Repetitive rating: Pulse width limited by max. junction temperature

IRF9230/9231/9232/9233
 IRFP9230/9231/9232/9233
 IRF9630/9631/9632/9633

78 DE 7964142 0005418 5

P-CHANNEL

POWER MOSFETS

7964142 SAMSUNG SEMICONDUCTOR INC

98D 05418 D

ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise specified)

T-39-21

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV _{DSS}	IRF9230/2 IRFP9230/2 IRF9630/2	-200	—	—	V	V _{GS} =0V
		IRF9231/3 IRFP9231/3 IRF9631/3	-150	—	—	V	I _D =-250μA
Gate Threshold Voltage	V _{GS(th)}	ALL	-2.0	—	-4.0	V	V _{DS} =V _{GS} , I _D =-250μA
Gate-Source Leakage Forward	I _{GSS}	ALL	—	—	-100	nA	V _{GS} =-20V
Gate-Source Leakage Reverse	I _{GSS}	ALL	—	—	100	nA	V _{GS} =20V
Zero Gate Voltage Drain Current	I _{DSS}	ALL	—	—	-250	μA	V _{DS} =Max. Rating, V _{GS} =0V
		ALL	—	—	-1000	μA	V _{DS} =Max. Rating×0.8, V _{GS} =0V, T _C =125°C
On-State Drain-Source Current (2)	I _{D(on)}	IRF9230/1 IRFP9230/1 IRF9630/1	-6.5	—	—	A	V _{DS} >I _{D(on)} ×R _{DS(on)} max., V _{GS} =-10V
		IRF9232/3 IRFP9232/3 IRF9632/3	-5.5	—	—	A	
Static Drain-Source On-State Resistance (2)	R _{DS(on)}	IRF9230/1 IRFP9230/1 IRF9630/1	—	—	0.8	Ω	V _{GS} =-10V, I _D =-3.5A
		IRF9232/3 IRFP9232/3 IRF9632/3	—	—	1.2	Ω	
Forward Transconductance (2)	g _{fs}	ALL	2.2	—	—	S	V _{DS} >I _{D(on)} ×R _{DS(on)} max., I _D =-3.5A
Input Capacitance	C _{iss}	ALL	—	—	650	pF	V _{GS} =0V, V _{DS} =-25V, f=1.0MHz
Output Capacitance	C _{oss}	ALL	—	—	300	pF	
Reverse Transfer Capacitance	C _{rss}	ALL	—	—	90	pF	
Turn-On Delay Time	t _{d(on)}	ALL	—	—	50	ns	
Rise Time	t _r	ALL	—	—	100	ns	V _{DD} =0.5BV _{DSS} , I _D =-3.5A, Z ₀ =50Ω, (MOSFET switching times are essentially independent of operating temperature.)
Turn-Off Delay Time	t _{d(off)}	ALL	—	—	100	ns	
Fall Time	t _f	ALL	—	—	80	ns	
Total Gate Charge (Gate-Source Plus Gate-Drain)	Q _g	ALL	—	—	45	nC	V _{GS} =-15V, I _D =-8.0A, V _{DS} =0.8 Max. Rating (Gate charge is essentially independent of operating temperature.)
Gate-Source Charge	Q _{gs}	ALL	—	—	20	nC	
Gate-Drain ("Miller") Charge	Q _{gd}	ALL	—	—	25	nC	

THERMAL RESISTANCE

Junction-to-Case	R _{thJC}	ALL	—	—	1.67	K/W	
Case-to-Sink	R _{thCS}	ALL	—	1.0	—	K/W	Mounting surface flat, smooth, and greased
Junction-to-Ambient	R _{thJA}	IRFPXXXX IRF96XX	—	—	80	K/W	Free Air Operation
		IRF92XX	—	—	30	K/W	

Notes: (1) T_J=25°C to 150°C

(2) Pulse test: Pulse width≤300μs, Duty Cycle≤2%

(3) Repetitive rating: Pulse width limited by max. junction temperature

IRF9230/9231/9232/9233
 IRFP9230/9231/9232/9233
 IRF9630/9631/9632/9633

78 DE 7964142 0005419 7


P-CHANNEL
 POWER MOSFETS

7964142 SAMSUNG SEMICONDUCTOR INC





98D 05419 D

SOURCE-DIODE RATINGS AND CHARACTERISTICS

T-39-21


Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Continuous Source Current (Body Diode)	I _S	IRF9230/1 IRFP9230/1 IRF9630/1	—	—	-6.5	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier 
		IRF9232/3 IRFP9232/3 IRF9632/3	—	—	-5.5	A	
Pulse Source Current (Body Diode) (3)	I _{SM}	IRF9230/1 IRFP9230/1 IRF9630/1	—	—	-26	A	
		IRF9232/3 IRFP9232/3 IRF9632/3	—	—	-22	A	
Diode Forward Voltage (2)	V _{SD}	IRF9230/1 IRFP9230/1 IRF9630/1	—	—	-6.5	V	T _C =25°C, I _S =-6.5A, V _{GS} =0V
		IRF9232/3 IRFP9232/3 IRF9632/3	—	—	-6.3	V	T _C =25°C, I _S =-5.5A, V _{GS} =0V
Reverse Recovery Time	t _{rr}	ALL	—	—	—	ns	T _J =150°C, I _F =-6.5A, dI _F /dt=100A/μs

Notes: (1) T_J=25°C to 150°C (2) Pulse test: Pulse width ≤ 300μs, Duty Cycle ≤ 2%
 (3) Repetitive rating: Pulse width limited by max. junction temperature

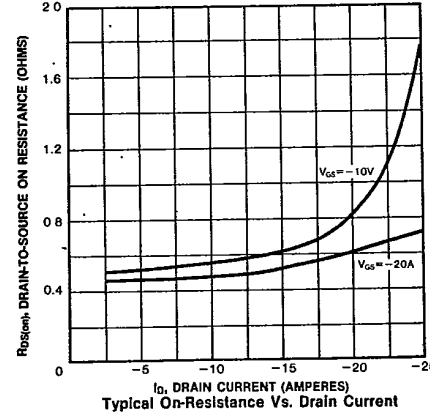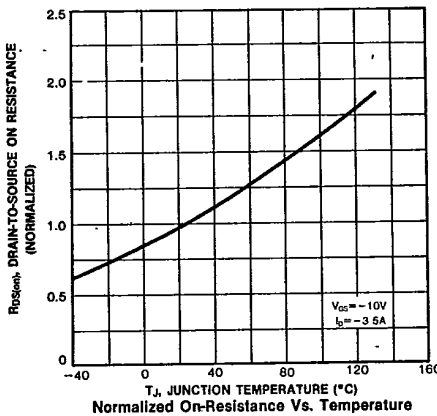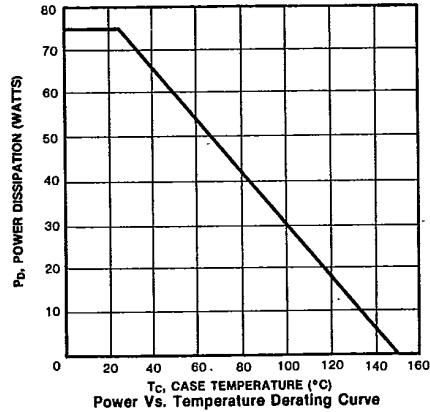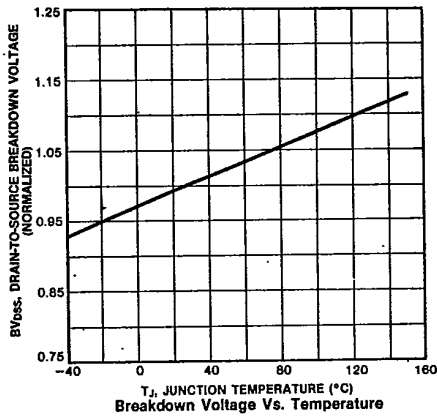

Preliminary Specifications

-200 Volt, 0.5 Ohm SFET

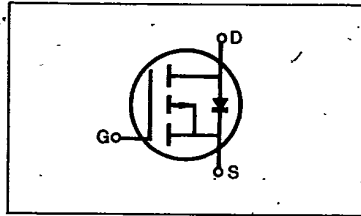

FEATURES

- Low $R_{DS(on)}$
- Improved inductive ruggedness
- Fast switching times
- Rugged polysilicon gate cell structure
- Low input capacitance
- Extended safe operating area
- Improved high temperature reliability

98 DE 7964142 0005420 3

PRODUCT SUMMARY

Part Number	V_{DS}	$R_{DS(on)}$	I_D
IRF/IRFP9240, IRF9640	-200V	0.5Ω	-11A
IRF/IRFP9241, IRF9641	-150V	0.5Ω	-11A
IRF/IRFP9242, IRF9642	-200V	0.7Ω	-9.0A
IRF/IRFP9243, IRF9643	-150V	0.7Ω	-9.0A

PACKAGE STYLE

Package Type	Part Number
TO-3	IRF9240/9241/9242/9243
TO-3P	IRFP9240/9241/9242/9243
TO-220	IRF9640/9641/9642/9643

MAXIMUM RATINGS

Characteristic	Symbol	IRF/IRFP				Unit
		9240 9640	9241 9641	9242 9642	9243 9643	
Drain-Source Voltage (1)	V_{DSS}	-200	-150	-200	-150	Vdc
Drain-Gate Voltage ($R_{GS}=1.0M\Omega$) (1)	V_{DGR}	-200	-150	-200	-150	vac
Gate-Source Voltage	V_{GS}	±20				Vdc
Continuous Drain Current $T_C=25^\circ C$	I_D	-11	-11	-9.0	-9.0	Adc
Continuous Drain Current $T_C=100^\circ C$	I_D	-7.0	-7.0	-6.0	-6.0	Adc
Drain Current—Pulsed (3)	I_{DM}	-44	-44	-36	-36	Adc
Gate Current—Pulsed	I_{GM}	±1.5				Adc
Total Power Dissipation @ $T_C=25^\circ C$ Derate above $25^\circ C$	P_D	125 1.0				Watts W/°C
Operating and Storage Junction Temperature Rangy	T_J, T_{stg}	-55 to 150				°C
Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5 seconds	T_L	300				°C

- Notes: (1) $T_J=25^\circ C$ to $150^\circ C$
 (2) Pulse test: Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$
 (3) Repetitive rating: Pulse width limited by max. junction temperature

IRF9240/9241/9242/9243

IRFP9240/9241/9242/9243

IRF9640/9641/9642/9643

P-CHANNEL
POWER MOSFETS

T-39-Q3

ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise specified)

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV _{DSS}	IRF9240/2 IRFP9240/2 IRF9640/2	-200	—	—	V	V _{GS} =0V
		IRF9241/3 IRFP9241/3 IRF9641/3	-150	—	—	V	I _D =-250μA
Gate Threshold Voltage	V _{GS(th)}	ALL	-2.0	—	-4.0	V	V _{DS} =V _{GS} , I _D =-250μA
Gate-Source Leakage Forward	I _{GSS}	ALL	—	—	-100	nA	V _{GS} =-20V
Gate-Source Leakage Reverse	I _{GSS}	ALL	—	—	100	nA	V _{GS} =20V
Zero Gate Voltage Drain Current	I _{DSS}	ALL	—	—	-250	μA	V _{DS} =Max. Rating, V _{GS} =0V
		—	—	—	-1000	μA	V _{DS} =Max. Rating×0.8, V _{GS} =0V, T _C =125°C
On-State Drain-Source Current (2)	I _{D(on)}	IRF9240/1 IRFP9240/1 IRF9640/1	-11	—	—	A	V _{DS} >I _{D(on)} ×R _{DS(on) max.} , V _{GS} =-10V
		IRF9642 IRF9643	-9.0	—	—	A	
Static Drain-Source On-State Resistance (2)	R _{DS(on)}	IRF9240/1 IRFP9240/1 IRF9640/1	—	—	0.5	Ω	V _{GS} =-10V, I _D =-6.0A
		IRF9242/3 IRFP9242/3 IRF9642/3	—	—	0.7	Ω	
Forward Transconductance (2)	g _{fs}	ALL	4.0	—	—	S	V _{DS} >I _{D(on)} ×R _{DS(on) max.} , I _D =-6.0A
Input Capacitance	C _{iss}	ALL	—	—	1300	pF	V _{GS} =0V, V _{DS} =-25V, f=1.0MHz
Output Capacitance	C _{oss}	ALL	—	—	450	pF	
Reverse Transfer Capacitance	C _{rss}	ALL	—	—	250	pF	
Turn-On Delay Time	t _{d(on)}	ALL	—	—	30	ns	V _{DD} =0.5BV _{DSS} , I _D =-6.0A, Z _O =4.7Ω, (MOSFET switching times are essentially independent of operating temperature.)
Rise Time	t _r	ALL	—	—	15	ns	
Turn-Off Delay Time	t _{d(off)}	ALL	—	—	18	ns	
Fall Time	t _f	ALL	—	—	12	ns	
Total Gate Charge (Gate-Source Plus Gate-Drain)	Q _g	ALL	—	—	90	nC	V _{GS} =-15V, I _D =-22A, V _{DS} =0.8 Max. Rating (Gate charge is essentially independent of operating temperature.)
Gate-Source Charge	Q _{gs}	ALL	—	—	30	nC	
Gate-Drain ("Miller") Charge	Q _{gd}	ALL	—	—	60	nC	

THERMAL RESISTANCE

Junction-to-Case	R _{thJC}	ALL	—	—	1.0	K/W	
Case-to-Sink	R _{thCS}	ALL	—	1.0	—	K/W	Mounting surface flat, smooth, and greased
Junction-to-Ambient	R _{thJA}	IRFPXXX IRF96XX	—	—	80		Free Air Operation
		IRF92XX	—	—	30	K/W	


Notes: (1) T_J=25°C to 150°C

(2) Pulse test: Pulse width≤300μs, Duty Cycle≤2%





(3) Repetitive rating: Pulse width limited by max. junction temperature



98 DE 7964142 0005422 7
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Characteristic	Symbol	Type	Min	Typ	Max	Units	Test Conditions
Continuous Source Current (Body Diode)	I _S	IRF9240/1 IRFP9240/1 IRF9640/1	—	—	-11	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier 
		IRF9242/3 IRFP9242/3 IRF9642/3	—	—	-9.0	A	
		IRF9240/1 IRFP9240/1 IRF9640/1	—	—	-44	A	
Pulse Source Current (Body Diode) (3)	I _{SM}	IRF9240/1 IRFP9240/1 IRF9640/1	—	—	-44	A	
		IRF9242/3 IRFP9242/3 IRF9642/3	—	—	-36	A	
		IRF9240/1 IRFP9240/1 IRF9640/1	—	—	-4.6	V	
Diode Forward Voltage (2)	V _{SD}	IRF9240/1 IRFP9240/1 IRF9640/1	—	—	-4.6	V	T _C =25°C, I _S =-11A, V _{GS} =0V
		IRF9242/3 IRFP9242/3 IRF9642/3	—	—	-4.4	V	T _C =25°C, I _S =-9.0A, V _{GS} =0V
Reverse Recovery Time	t _{rr}	ALL	—	—	—	ns	T _J =150°C, I _F =-11A, dI _F /dt=100A/μs

Notes: (1) T_J=25°C to 150°C (2) Pulse test: Pulse width ≤ 300μs, Duty Cycle ≤ 2%
 (3) Repetitive rating: Pulse width limited by max. junction temperature

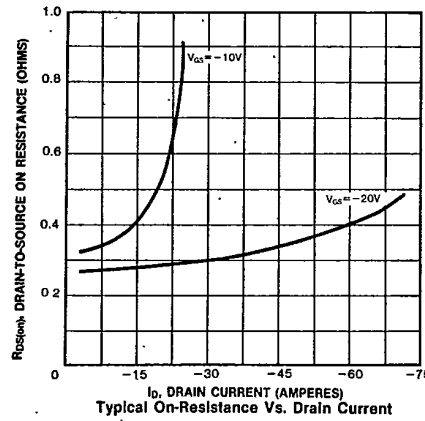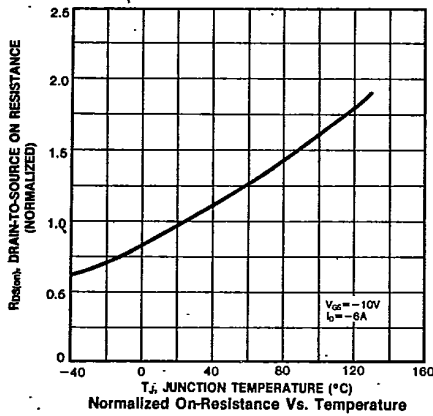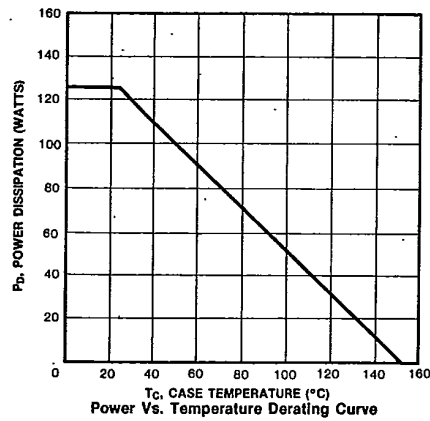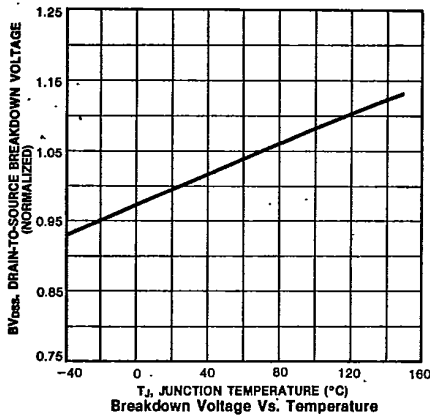

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.