
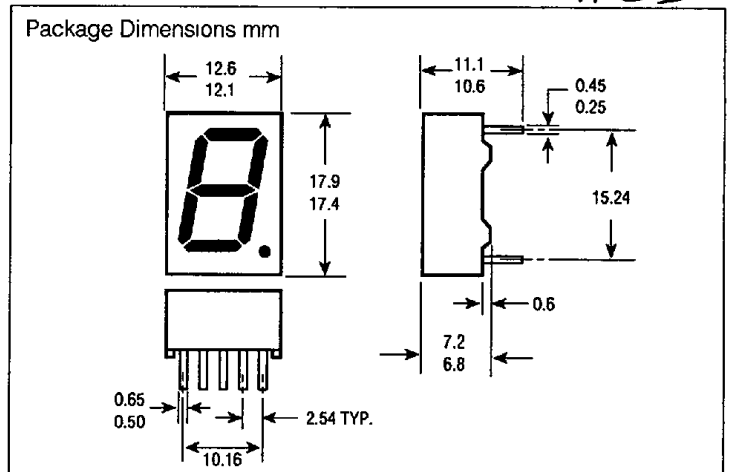


**SIEMENS**

**RED HD1131R/1133R**  
**SUPER-RED HD1131O/1133O**  
**YELLOW HD1131Y/1133Y**  
**GREEN HD1131G/1133G**

**0.51" (13 mm) SEVEN SEGMENT NUMERIC DISPLAY**

T-41-33

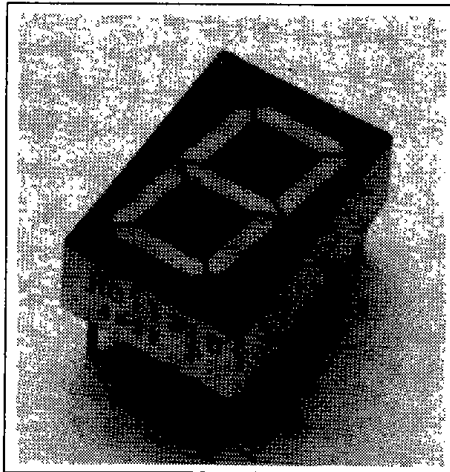

**FEATURES**

- Rugged Encapsulated Package
- Large 0.51 Inch (13 mm) Digit Height
- Choice of Colors
- Common Anode or Common Cathode
- Wide Viewing
- Intensity Coded for Display Uniformity

**DESCRIPTION**

The 0.51 inch (13 mm) digit height series of HD1131/1133 Seven Segment Displays offer the choice of common anode or common cathode versions with right hand decimal point.

These displays were designed for viewing distances of up to 20 feet and can be used in electronic instruments, point-of-sale systems, clocks, and other general industrial and consumer applications. All displays have a light grey face.

Contrast enhancement filters are recommended for use with all displays.

**Product**

- HD1131R
- HD1133R
- HD1131O
- HD1133O
- HD1131Y
- HD1133Y
- HD1131G
- HD1133G

**Color**

- Red
- Red
- Super-Red
- Super-Red
- Yellow
- Yellow
- Green
- Green

**Description**

- Common Anode, Right Decimal
- Common Cathode, Right Decimal
- Common Anode, Right Decimal
- Common Cathode, Right Decimal
- Common Anode, Right Decimal
- Common Cathode, Right Decimal
- Common Anode, Right Decimal
- Common Cathode, Right Decimal

**Maximum Ratings**

Power Dissipation per Segment <sup>1)</sup> (P <sub>TOT</sub> )	60 mW
Operating and Storage Temperature (T <sub>A</sub> , T <sub>STG</sub> )	-40°C to +85°C
Forward Current per Segment <sup>1)</sup> (I <sub>F</sub> )	20 mA
Surge Current <sup>1)</sup> (I <sub>S</sub> , t <sub>p</sub> ≤ 10 μs, I <sub>RM</sub> )	150 mA
Reverse Voltage (V <sub>R</sub> )	6 V
Thermal Resistance (R <sub>TH(LA)</sub> )	115 KW

**Note:**  
<sup>1)</sup> T<sub>A</sub> = 45°C

See graph numbers 1, 2, 3A, 4A, 5A, 6C, 7, 8, 9, 10 on pages 25 - 27.

T-41-33

Characteristics ( $T_A=25^\circ\text{C}$ )

Parameter	Symbol	HD1131/3R Red	HD1131/3O Super-Red	HD1131/3Y Yellow	HD1131/3G Green	Unit
Wavelength at Peak						
Emission ( $I_F=10\text{ mA}$ )	$\lambda_{\text{PEAK}}$	660	635	586	565	nm
Dominant Wavelength	$\lambda_{\text{DOM}}$	645	628	590	567	nm
Spectral Bandwidth @ 50% $I_F$ ( $I_F=10\text{ mA}$ )	$\Delta\lambda$	35	45	45	25	nm
Forward Voltage ( $I_F=10\text{ mA}$ )	$V_F$	1.6 ( $\leq 2.0$ )	2.0 ( $\leq 2.6$ )	2.0 ( $\leq 2.6$ )	2.0 ( $\leq 2.6$ )	V
Reverse Current per Segment ( $V_R=6\text{ V}$ )	$I_R$	0.01 ( $\leq 10$ )	0.01 ( $\leq 10$ )	0.01 ( $\leq 10$ )	0.01 ( $\leq 10$ )	$\mu\text{A}$
Capacitance per Segment ( $V_R=0\text{ V}$ , $f=1\text{ MHz}$ )	$C_D$	25	12	10	15	pF
Rise Time (typ.)	$t_R$	120	300	300	450	ns
Fall Time (typ.)	$t_F$	50	150	150	200	ns
Luminous Intensity per Segment <sup>1)</sup> ( $I_F=10\text{ mA}$ )	$\mu\text{cd}$	750	2900	1500	1500	$\mu\text{cd}$

Note:

1. Deviation of the absolute values within one digit  $\frac{I_{V\text{MAX}}}{I_{V\text{MIN}}} \leq 2$

Num. Displays  
Bar Graphs  
Light Bars



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.