

GP2L20L/GP2L20R

Compact, Thin Type Photointerrupter

■ Features


1. Correspond to DAT prism system
2. Compact and thin

■ Applications

1. Digital audio tape recorder

■ Outline Dimensions

(Unit : mm)

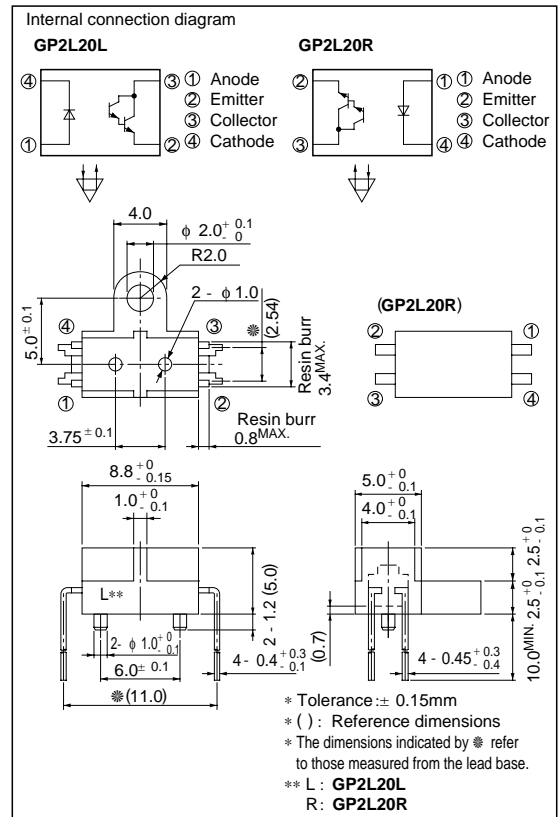

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	*1 Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
Operating temperature		T _{opr}	- 25 to + 85	°C
Storage temperature		T _{stg}	- 40 to + 100	°C
*2 Soldering temperature		T _{sol}	260	°C

*1 Pulse width $\leq 100 \mu\text{s}$, duty ratio = 0.01

*2 For 5 seconds

Electro-optical Characteristics

($T_a = 25^\circ\text{C}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V_F	$I_F = 20\text{mA}$	-	1.2	1.4	V	
	Peak forward voltage	V_{FM}	$I_{FM} = 0.5\text{A}$	-	3	4	V	
	Reverse current	I_R	$V_R = 3\text{V}$	-	-	10	μA	
Output	Collector dark current	I_{CEO}	$V_{CE} = 10\text{V}$	-	-	1×10^{-6}	A	
Transfer characteristics	*3 Collector current		I_C	$V_{CE} = 5\text{V}, I_F = 20\text{mA}$	1	-	20	mA
	Response time	Rise time	t_r	$V_{CE} = 2\text{V}, I_C = 2\text{mA}$	-	80	400	μs
		Fall time	t_f	$R_L = 100\ \Omega$	-	70	350	μs
	*4 Leak current		I_{LEAK}	$V_{CE} = 5\text{V}, I_F = 20\text{mA}$	-	-	5	μA

*3 The condition and arrangement of the reflective object are shown in the right drawing.

*4 Without reflective object

Test Condition and Arrangement for Collector Current

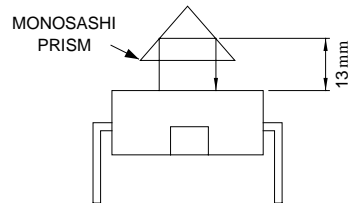


Fig. 1 Forward Current vs. Ambient Temperature

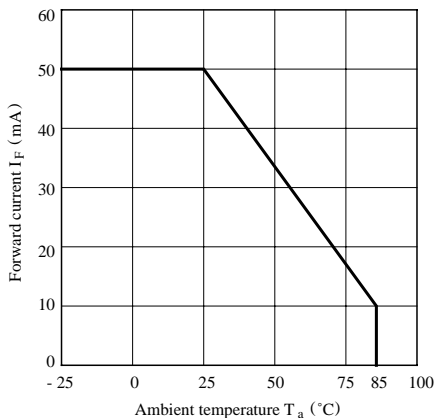


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

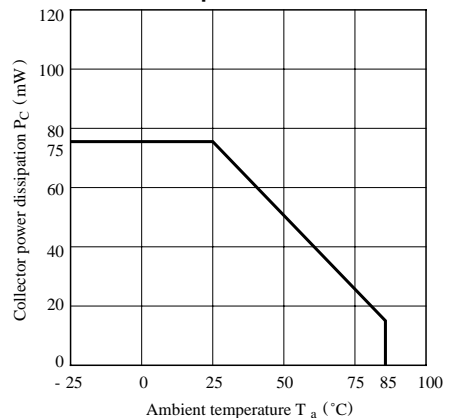


Fig. 3 Peak Forward Current vs. Duty Ratio

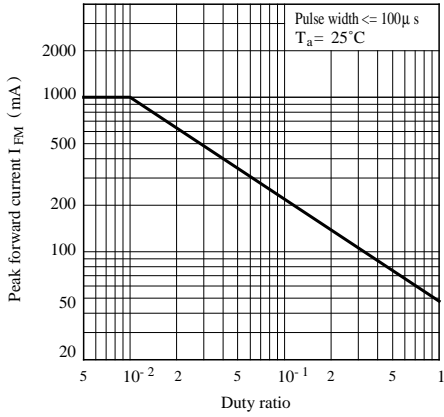


Fig. 4 Forward Current vs. Forward Voltage

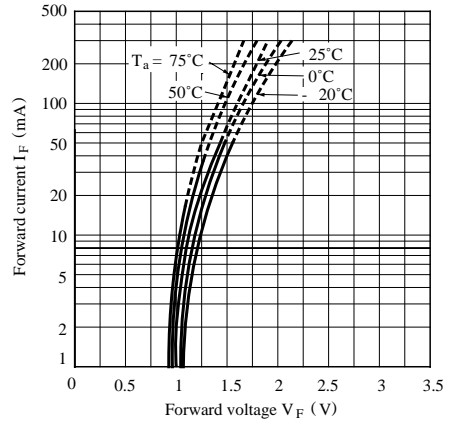


Fig. 5 Collector Current vs. Forward Current

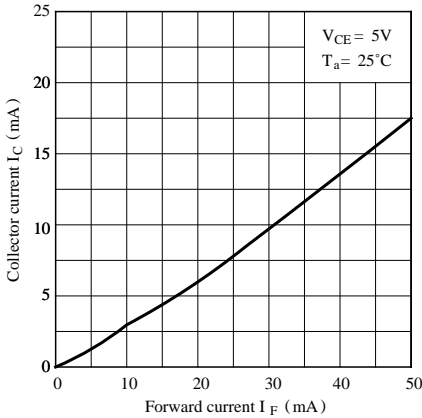


Fig. 6 Collector Current vs. Collector-Emitter Voltage

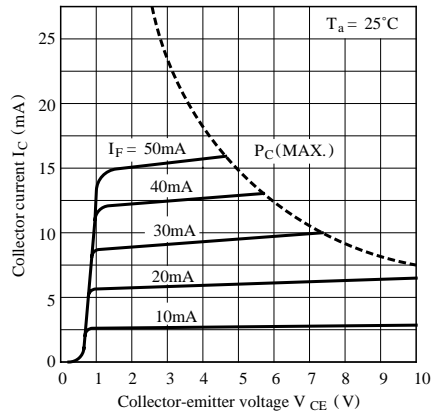


Fig. 7 Relative Collector Current vs. Ambient Temperature


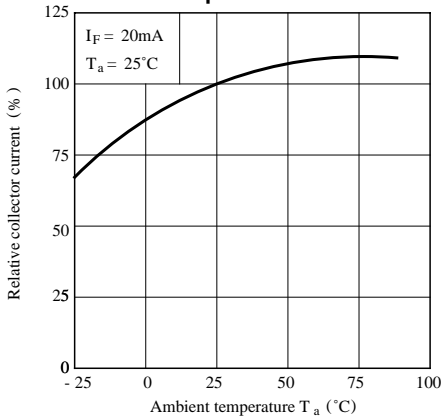


Fig. 8 Response Time vs. Load Resistance

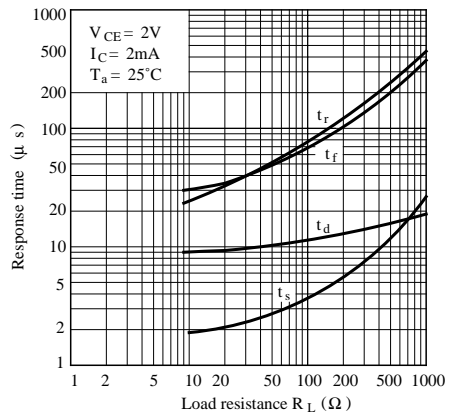

Test Circuit for Response time

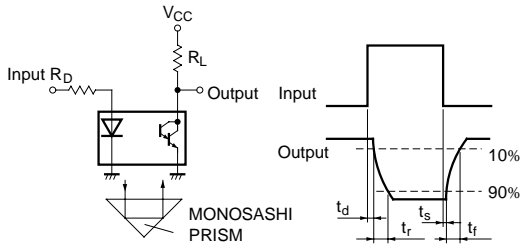


Fig. 9 Frequency Response


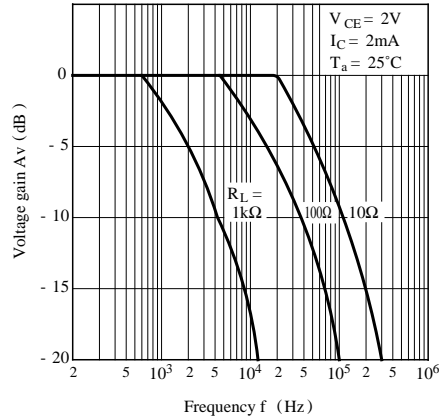


Fig.10 Collector Dark Current vs. Ambient Temperature



- Please refer to the chapter “Precautions for Use”.

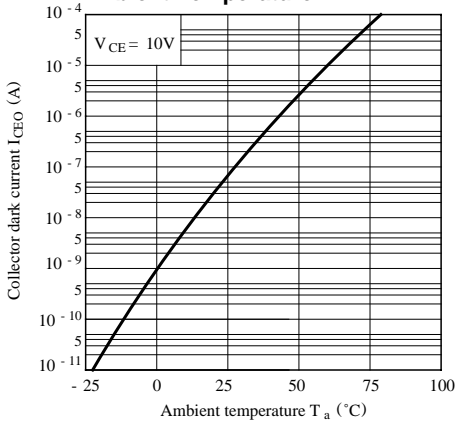

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.