



GP20A THRU GP20M

2.0 AMPS. Glass Passivated Junction Plastic Rectifiers



Voltage Range
50 to 1000 Volts
Current
2.0 Amperes


Features

- ✦ High temperature metallurgically bonded construction
- ✦ Plastic material used carries Underwriters Laboratory Classification 94V-0
- ✦ Glass passivated cavity-free junction
- ✦ Capable of meeting environmental standards of MIL-S-19500
- ✦ 2.0 amperes operation at $T_A=55^\circ\text{C}$ and with no thermal runaway
- ✦ Typical I_R less than 0.1 uA
- ✦ High temperature soldering guaranteed: $350^\circ\text{C} / 10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

- ✦ Case: JEDEC DO-201 molded plastic over glass body
- ✦ Lead: Plated axial leads, solderable per MIL-STD-750, Method 2026
- ✦ Polarity: Color band denotes cathode end
- ✦ Mounting position: Any
- ✦ Weight: 0.03 ounce, 0.8 gram

DO-201

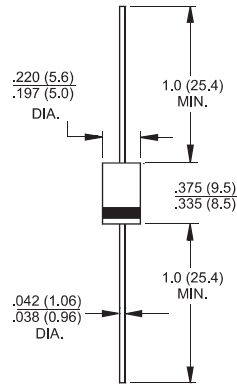

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	GP 20A	GP 20B	GP 20D	GP 20G	GP 20J	GP 20K	GP 20M	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	2.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	65							A
Maximum Instantaneous Forward Voltage @2.0A	V_F	1.2		1.1					V
Maximum Full Load Reverse Current at Rated DC Blocking Voltage	I_R	5.0							uA
Maximum Full Load Reverse Current, Full Cycle Average .375" (9.5mm) Lead Length @ $T_A=55^\circ\text{C}$	HT_{IR}	100							uA
Typical Reverse Recovery Time (Note 1)	T_{rr}	2.5							uS
Typical Junction Capacitance (Note 2)	C_j	40.0							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	40							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	- 65 to + 175							$^\circ\text{C}$

Notes: 1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

3. Mount on Cu-Pad Size 10mm x 10mm on P.C.B.

RATINGS AND CHARACTERISTIC CURVES (GP20A THRU GP20M)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

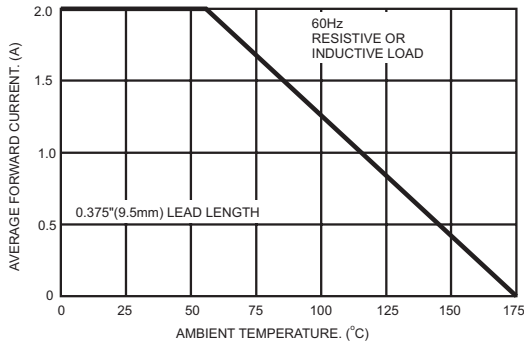


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

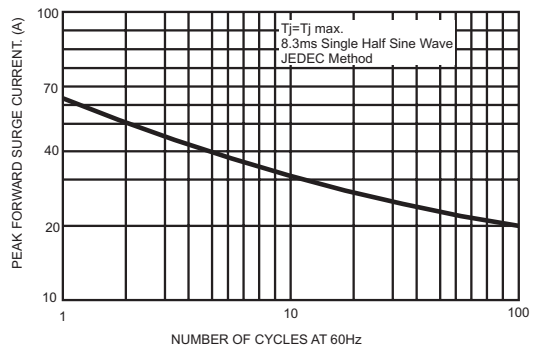


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

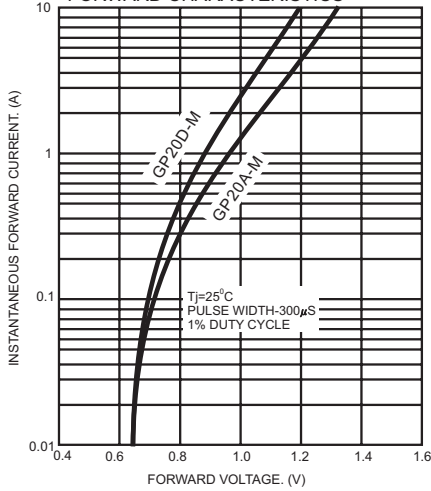


FIG.4- TYPICAL REVERSE CHARACTERISTICS


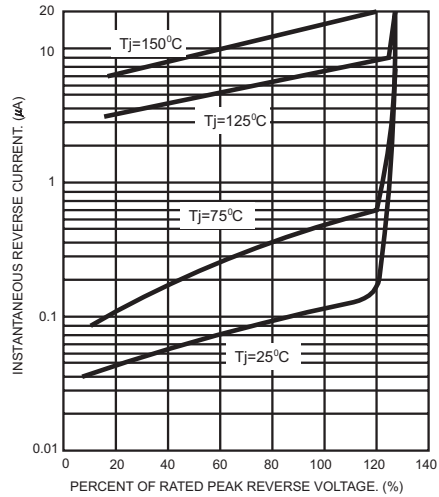


FIG.5- TYPICAL JUNCTION CAPACITANCE



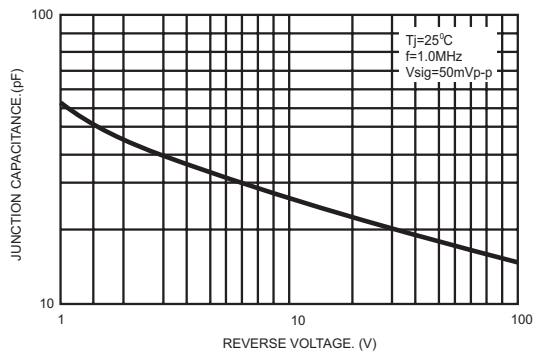

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.