

GP1S27

Subminiature Photointerrupter

■ Features


1. Ultra-compact
2. PWB mounting type package
3. Current transfer ratio
(CTR : MIN. 4.3%)

■ Applications

1. Cameras
2. Floppy disk drives

■ Outline Dimensions


(Unit : mm)

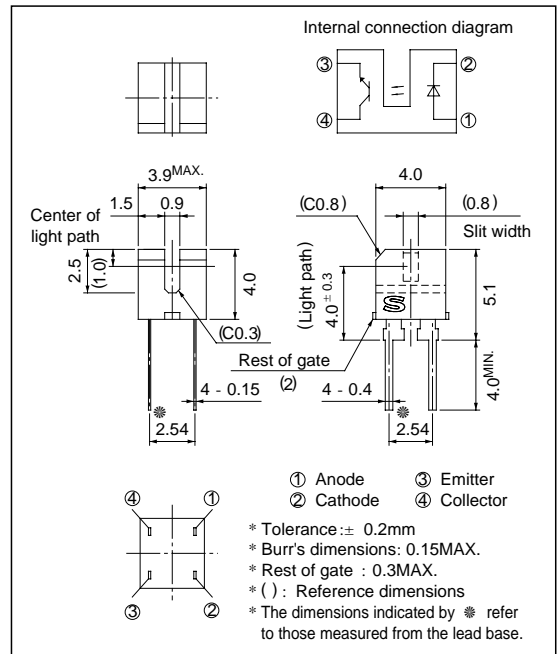

■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
Total power dissipation		P _{tot}	100	mW
Operating temperature		T _{opr}	- 25 to + 85	°C
Storage temperature		T _{sig}	- 40 to + 100	°C
*1 Soldering temperature		T _{sol}	260	°C



*1 For 5 seconds

■ Electro-optical Characteristics

($T_a = 25^\circ\text{C}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F = 20\text{mA}$	-	1.2	1.4	V
	Reverse current	I_R	$V_R = 3\text{V}$	-	-	10	μA
Output	Collector dark current	I_{CEO}	$V_{CE} = 20\text{V}$	-	-	1×10^{-7}	A
Transfer characteristics	Collector Current	I_c	$I_F = 1.5\text{mA}, V_{CE} = 5\text{V}$	65	-	200	μA
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = 3\text{mA}, I_C = 30\mu\text{A}$	-	-	0.4	V
	Response time	Rise time	t_r	$V_{CE} = 5\text{V}, R_L = 1\text{k}\Omega$	-	50	150
Fall time		t_f	$I_C = 100\mu\text{A}$	-	50	150	μs

Fig. 1 Forward Current vs. Ambient Temperature

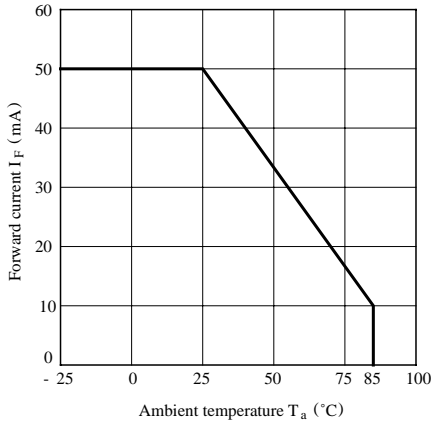


Fig. 2 Power Dissipation vs. Ambient Temperature

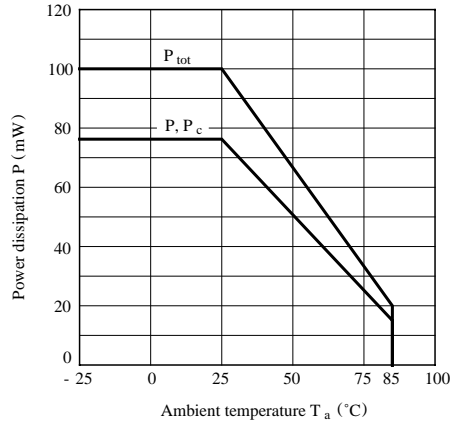


Fig. 3 Forward Current vs. Forward Voltage

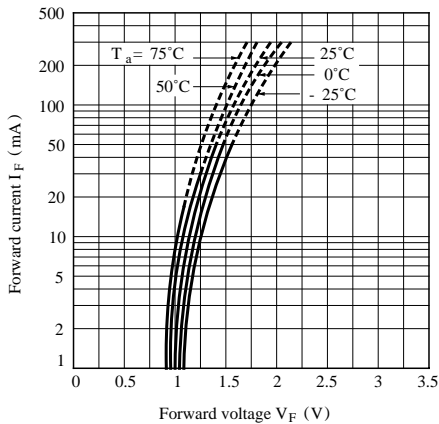


Fig. 4 Collector Current vs. Forward Current

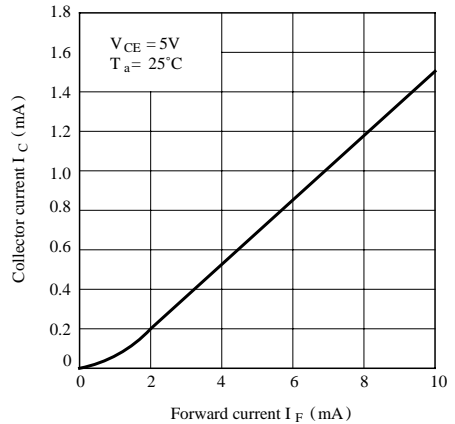


Fig. 5 Collector Current vs. Collector-emitter Voltage

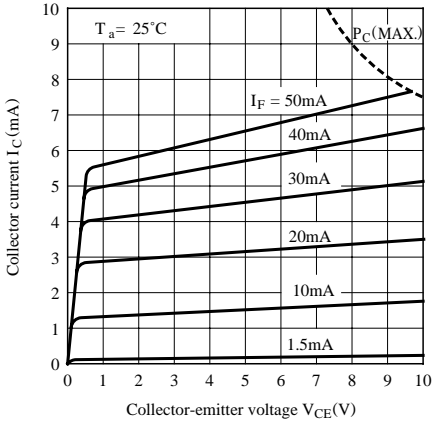


Fig. 6 Collector Current vs. Ambient Temperature

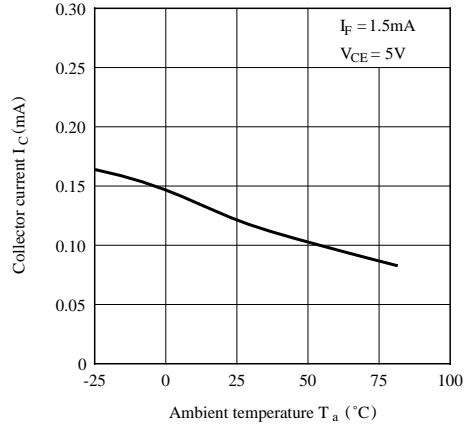


Fig. 7 Collector-emitter Saturation Voltage vs. Ambient Temperature

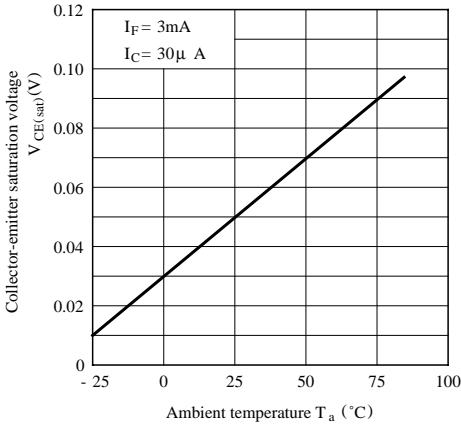


Fig. 8 Collector Dark Current vs. Ambient Temperature


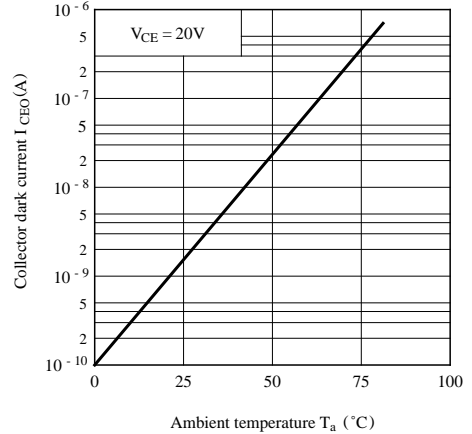


Fig. 9 Response Time vs. Load Resistance

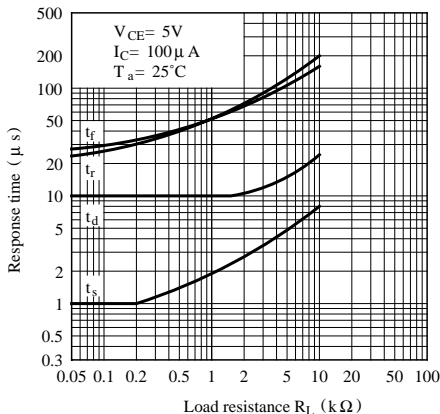

Test Circuit for Response Time

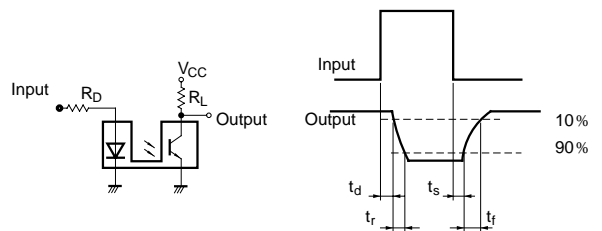


Fig.10 Relative Collector Current vs. Shield Distance (1)


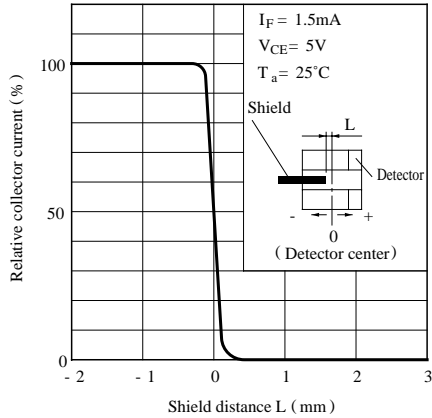


Fig.11 Relative Collector Current vs. Shield Distance (2)



■ Precautions for Use

- (1) Please refrain from soldering under preheating and refrain from soldering by reflow.
- (2) As for other general cautions, refer to the chapter "Precautions for Use".

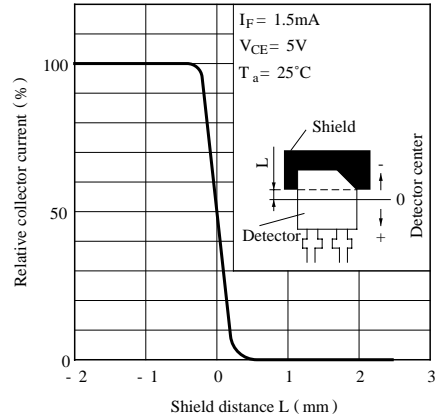

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.