

# GP1L55

## High Sensitivity Photointerrupter

### ■ Features


1. Compact package  
(Case height: 8mm)
2. High sensing accuracy  
(Slit width•••Detector: 0.15mm, Emitter: 0.5mm)
3. Easy positioning to PWB with positioning pin

### ■ Applications

1. Floppy disk drives
2. VCRs, Cassette decks
3. Optoelectronic switches, electronic counters, edge sensors.

### ■ Outline Dimensions

(Unit : mm)

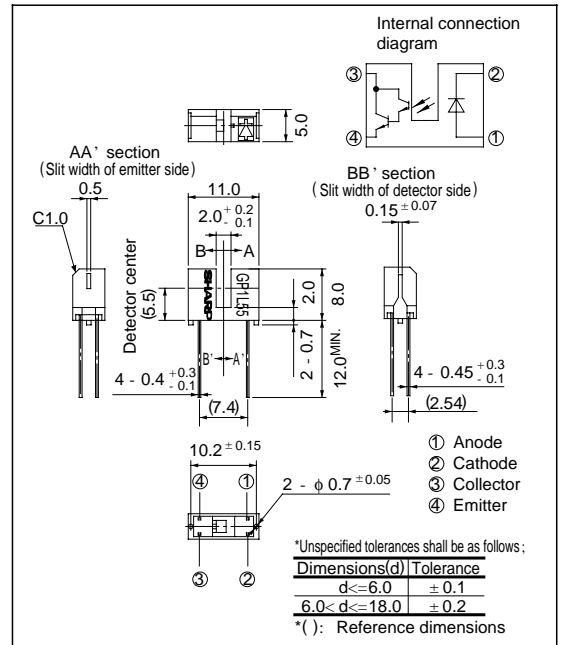

### ■ Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	*1 Peak forward current	I <sub>FM</sub>	1	A
	Reverse voltage	V <sub>R</sub>	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	35	V
	Emitter-collector voltage	V <sub>ECO</sub>	6	V
	Collector current	I <sub>C</sub>	40	mA
	Collector power dissipation	P <sub>C</sub>	75	mW
Operating temperature		T <sub>opr</sub>	- 25 to + 85	°C
Storage temperature		T <sub>stg</sub>	- 40 to + 100	°C
*2 Soldering temperature		T <sub>sol</sub>	260	°C

\*1 Pulse width ≤ 100 μs, Duty ratio = 0.01


\*2 For 5 seconds

**■ Electro-optical Characteristics**


( $T_a = 25^\circ\text{C}$ )

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	$V_F$	$I_F = 20\text{mA}$	-	1.2	1.4	V	
	Peak forward voltage	$V_{FM}$	$I_{FM} = 0.5\text{A}$	-	3	4	V	
	Reverse current	$I_R$	$V_R = 3\text{V}$	-	-	10	$\mu\text{A}$	
Output	Collector dark current	$I_{CEO}$	$V_{CE} = 10\text{V}$	-	-	$10^{-6}$	A	
Transfer characteristics	Collector Current	$I_C$	$I_F = 2\text{mA}, V_{CE} = 2\text{V}$	0.6	-	-	mA	
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = 4\text{mA}, I_C = 0.6\text{mA}$	-	-	1	V	
	Response time	Rise time	$t_r$	$V_{CE} = 2\text{V}, I_C = 10\text{mA}$	-	80	400	$\mu\text{s}$
		Fall time	$t_f$	$R_L = 100\ \Omega$	-	70	350	$\mu\text{s}$


**Fig. 1 Forward Current vs. Ambient Temperature**

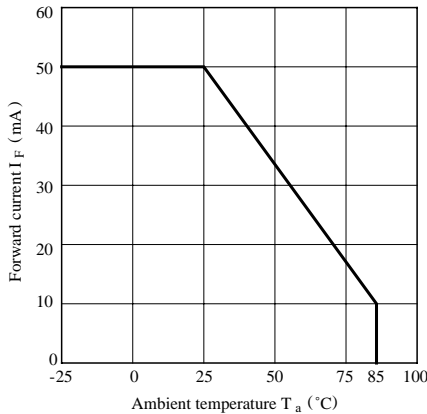


**Fig. 2 Collector Power Dissipation vs. Ambient Temperature**

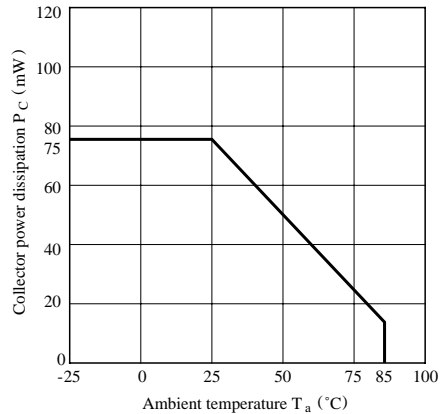


**Fig. 3 Peak Forward Current vs. Duty Ratio**

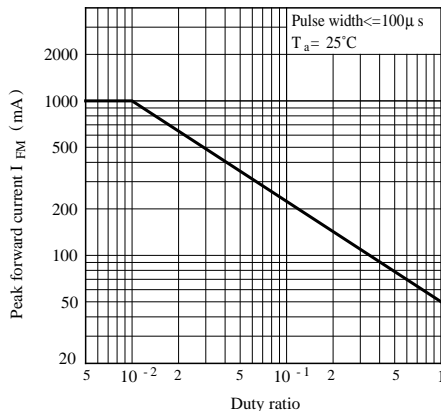


**Fig. 4 Forward Current vs. Forward Voltage**

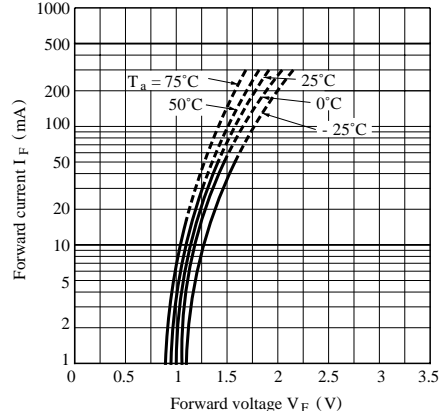


**Fig. 5 Collector Current vs. Forward Current**

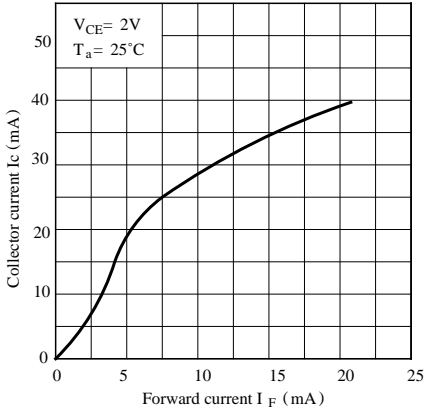


**Fig. 6 Collector Current vs. Collector-emitter Voltage**

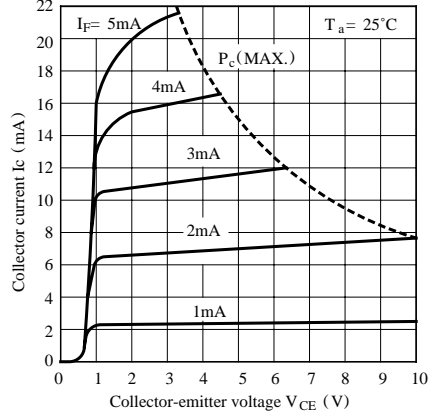


**Fig. 7 Collector Current vs. Ambient Temperature**

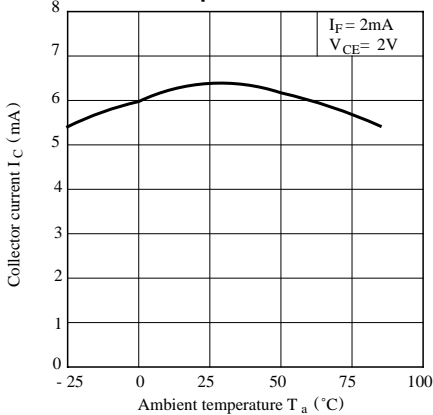


**Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

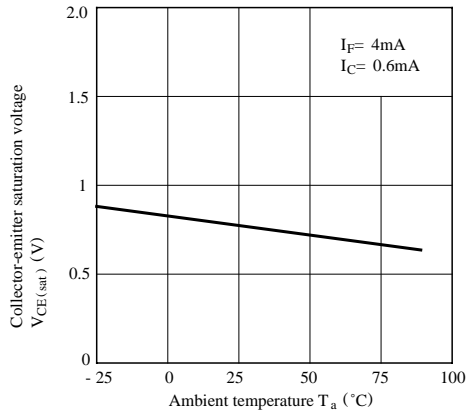


**Fig. 9 Response Time vs. Load Resistance**

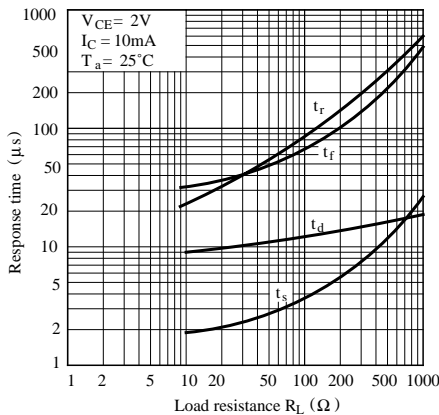


**Test Circuit for Response Time**

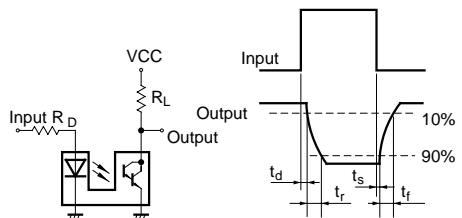


**Fig.10 Frequency Response**

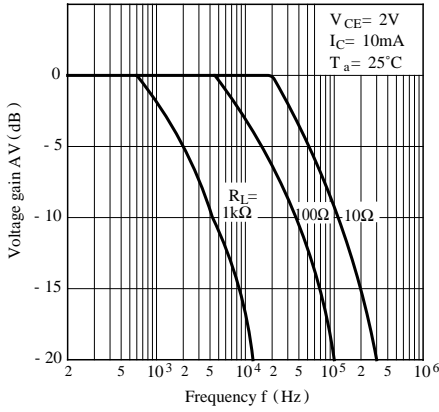


**Fig.11 Collector Dark Current vs. Ambient Temperature**

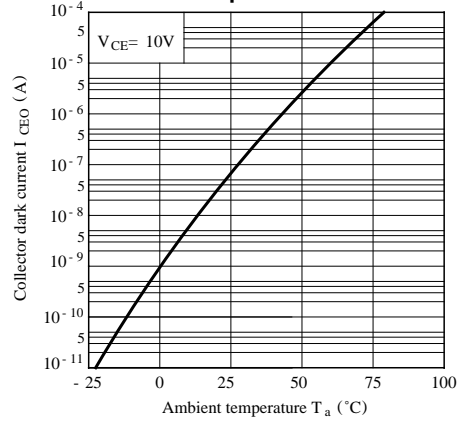

**Fig.12 Relative Collector Current vs. Shield Distance (1)**

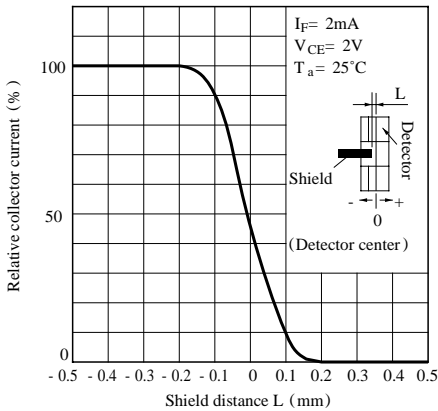

**Fig.13 Relative Collector Current vs. Shield Distance (2)**

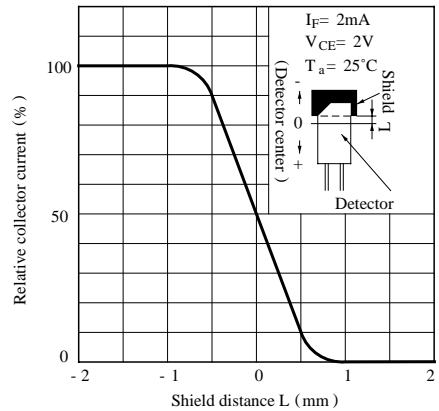

**■ Precautions for Use**

- (1) In case of cleaning, use only the following type of cleaning solvent.  
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol
- (2) As for other general cautions, refer to the chapter “Precautions for Use”.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.