

GL460/GL461

Double Ended Mold Type Infrared Emitting Diode

■ Features

1. Small double-end type package
(packaging area : 37% smaller than **GL480**)
2. High output power type (**GL461**)
3. Taped models 2,000pcs/reel (**GL460T**/
GL461T)

■ Applications

1. Floppy disk drives
2. VCRs
3. Audio equipment

■ Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Rating	Unit
Power dissipation	P	150	mW
Forward current	I _F	50	mA
*1 Peak forward current	I _{FM}	1	A
Reverse voltage	V _R	6	V
Operating temperature	T _{opr}	- 25 to + 85	°C
Storage temperature	T _{stg}	- 40 to + 85	°C
*2 Soldering temperature	T _{sol}	260	°C

*1 Pulse width ≤ 100 μs, Duty ratio = 0.01

*2 For MAX. 3 seconds at the position of 2.5mm from the bottom face of resin package.

■ Electro-optical Characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Forward voltage	V _F	I _F = 20mA	-	1.2	1.5	V
Peak forward voltage	V _{FM}	I _{FM} = 0.5A	-	2.2	4.0	V
Reverse current	I _R	V _R = 3V	-	-	10	μA
Terminal capacitance	C _t	V _R = 0V, f = 1MHz	-	20	-	pF
Response frequency	f _c	-	-	300	-	kHz
Radiant flux	GL460	I _F = 20mA	1.0	-	4.0	mW
	GL461		1.8	-	7.2	
Peak emission wavelength	λ _P	I _F = 5mA	-	950	-	nm
Half intensity wavelength	Δλ	I _F = 5mA	-	45	-	nm
Half intensity angle	Δθ	I _F = 20mA	-	± 40	-	°

■ Outline Dimensions

(Unit : mm)

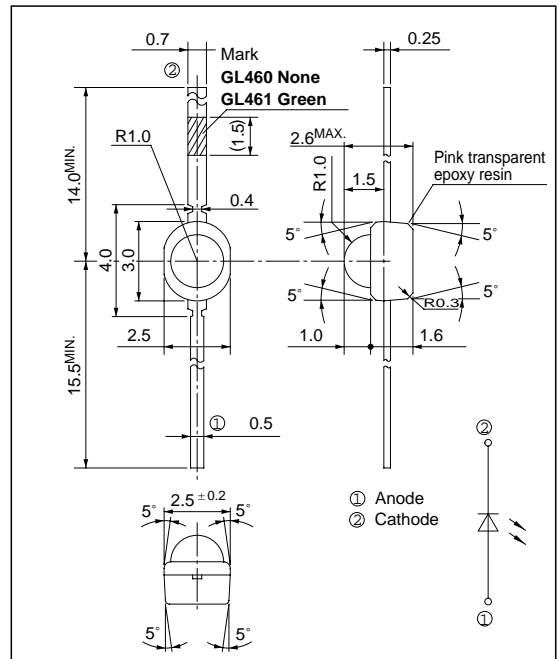


Fig. 1 Forward Current vs. Ambient Temperature

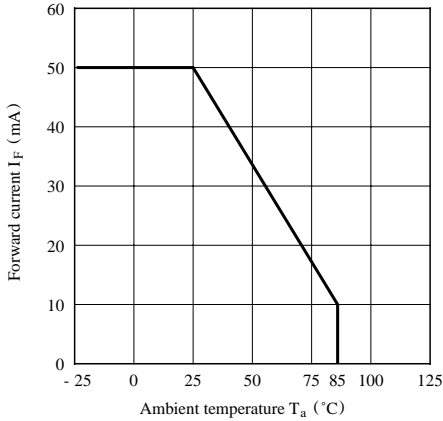


Fig. 2 Peak Forward Current vs. Duty Ratio

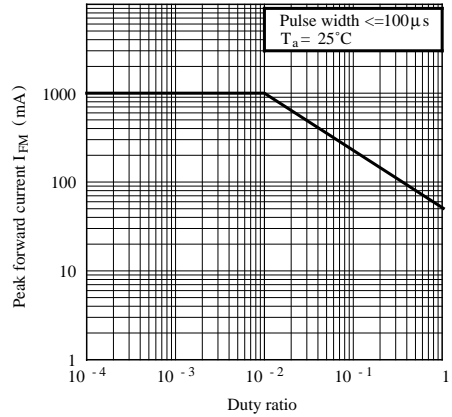


Fig. 3-a Spectral Distribution (GL460)

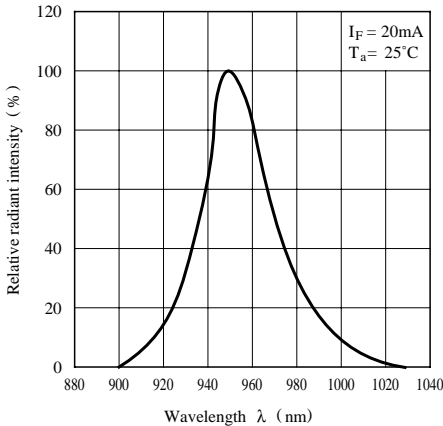


Fig. 3-b Spectral Distribution (GL461)

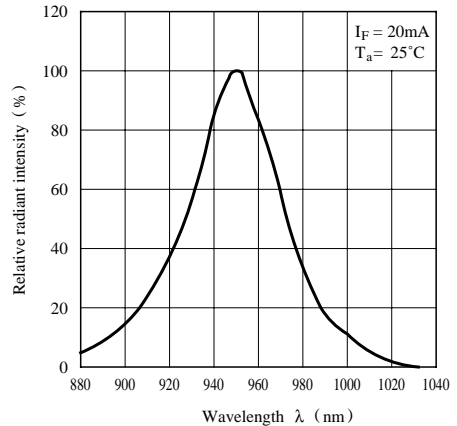


Fig. 4 Peak Emission Wavelength vs. Ambient Temperature

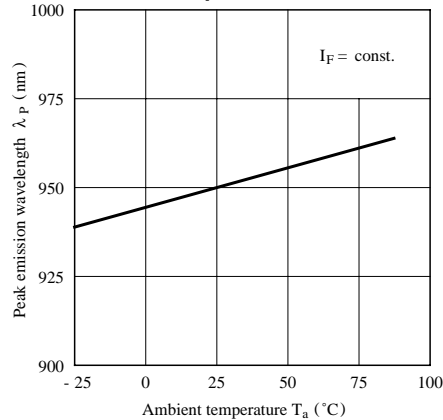


Fig. 5 Forward Current vs. Forward Voltage

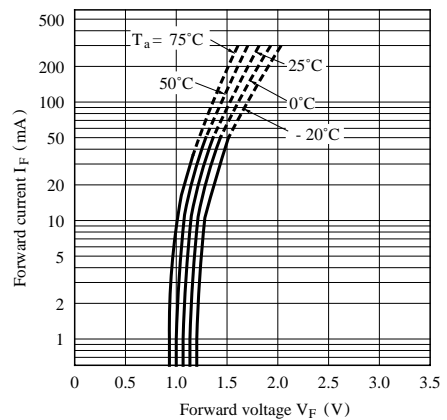


Fig. 6 Relative Radiant Flux vs. Ambient Temperature

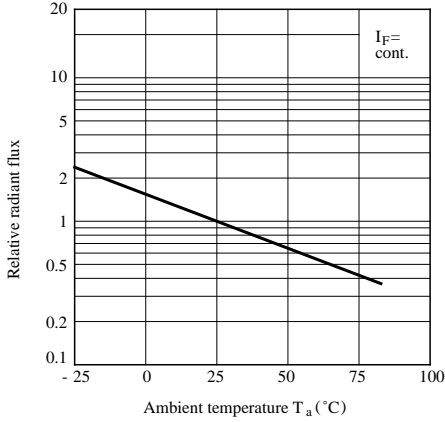


Fig. 7 Radiant Flux vs. Forward Current

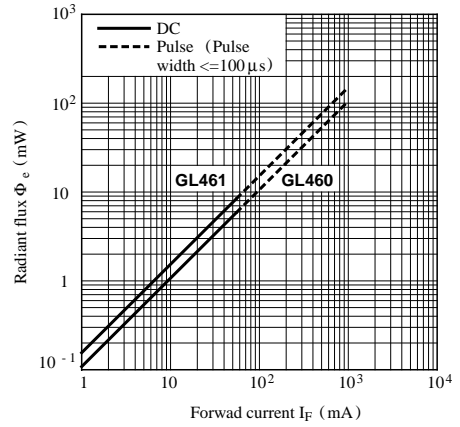


Fig. 8 Relative Collector Current vs. Distance (Detector : PT460)



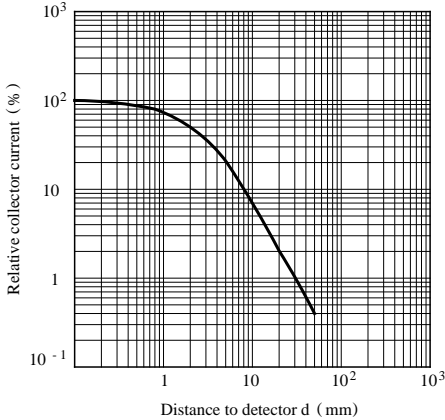


Fig. 9 Radiation Diagram

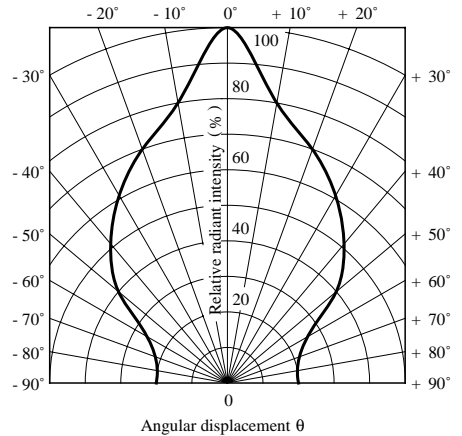

■ Taping Specifications (GL460T /GL461T)

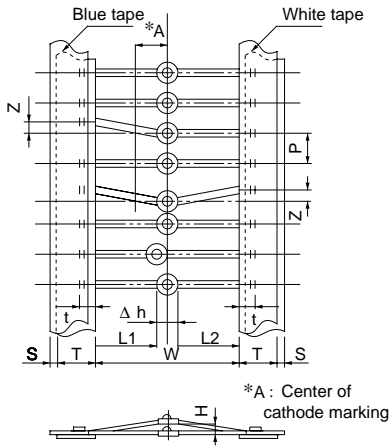


W	(Note 1) P	L2-L1	T	Z	Δ h	S	(Note 2) t	H	A
$26^{+1.5}_{-0.0}$	$5^{+0.5}_{-0.5}$	-	6^{+10}_{-10}	1.2 ^{MAX}	0.5 ^{MAX}	0.8 ^{MAX}	0.5 ^{MIN}	2.5 ^{MAX}	(4.5)

(Note 1) Tolerance of 20 pitches is ± 2 mm.

(Note 2) The lead's overlapping length on the tape.

■ Packing Specification (GL460T /GL461T)

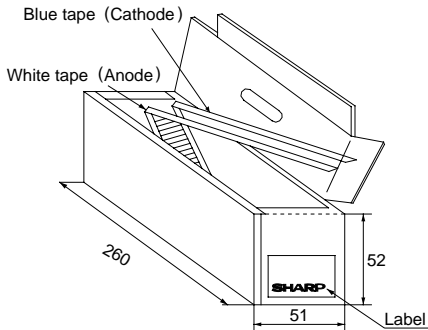

(1) Packing form

Box type

- The tape is zigzag-folded with 50 pcs. of IR LEDs per fold.
- IR LED inserting portions for 50 to 60 pcs. on the tape's starting and ending parts are not stuffed.
- For the taping of cathode pin, blue tape is used, and for anode pin, white tape is used.

(2) Packing quantity

2 000 pcs. per box

● Please refer to the chapter “Precautions for Use”



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.