



# SOT23 SILICON PLANAR HIGH SPEED SWITCHING DIODE PAIR (SERIES)

ISSUE 2 - OCTOBER 1995

## FMMD7000

### DIODE PIN CONNECTION

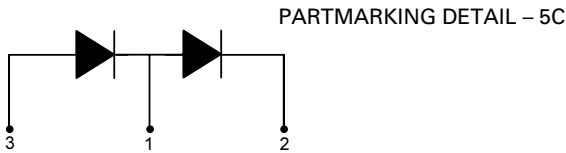

SOT23

### ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Breakdown Voltage ( $I_R=100\mu A$ )	$V_{(BR)}$	70	V
Peak Forward Current	$I_F$	200	mA
Peak Forward Surge Current	$I_{FM}$	500	mA
Power Dissipation at $T_{amb} = 25^\circ C$	$P_{tot}$	330	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ C$

### ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Breakdown Voltage	$V_{(BR)}$	100		V	$I_R=10\mu A$
Forward Voltage	$V_F$	0.5 0.8	0.7 1.1	V V	$I_F=1mA$ $I_F=100mA$
Reverse Current	$I_R$		0.3	$\mu A$	$V_R=50V$
Recovery Time*	$t_{rr}$		15	ns	$I_F= I_R=10mA, I_{R(REC)}=1.0mA$
Diode Capacitance	$C_d$		2.5	pF	$V_R=0, f=1MHz$

Spice parameter data is available upon request for this device



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.