



General Purpose CMOS Analog Switches

General Description

Maxim's DG381-DG390 and DG381A-DG390A CMOS dual and quad analog switches combine low power operation with fast switching times and superior DC and AC switch characteristics. On resistance is less than 50Ω and is essentially constant over the analog signal range. Device specifications are ideal for battery powered circuitry.

These switches are available in a variety of formats as outlined below in the Pin Configurations section. The switch control logic inputs are fully TTL and CMOS compatible. Also featured are "break-before-make" switching and low charge injection.

Maxim's DG381-DG390 and DG381A-DG390A families are electrically compatible and pin compatible with the original manufacturer's devices. All devices will operate with power supplies ranging from ±5V to ±18V. Single supply operation is implemented by connecting V⁻ to GND.

Applications

- Portable Instruments
- Low Power Sample/Holds
- Power Supply Switching
- Programmable Gain Amplifiers
- SPDT and DPDT Functions
- Process Control and Telemetry

Features


- ◆ Monolithic Low Power CMOS
- ◆ Latch-Up Proof Construction
- ◆ Fully Compatible 2nd Source
- ◆ Low On Resistance, <50Ω
- ◆ Fast Switching Time
- ◆ V⁺ to V⁻ Analog Signal Range
- ◆ Single Supply Capability

Ordering Information

| PART | TEMP. RANGE | PACKAGE |
|----------|-----------------|---------------------|
| DG381C/D | 0°C to +70°C | Dice |
| DG381CJ | 0°C to +70°C | 14 Lead Plastic DIP |
| DG381CWE | 0°C to +70°C | 16 Lead Wide SO |
| DG381CK | 0°C to +70°C | 14 Lead CERDIP |
| DG381BWE | -25°C to +85°C | 16 Lead Wide SO |
| DG381BK | -25°C to +85°C | 14 Lead CERDIP |
| DG381BA | -25°C to +85°C | 10 Lead Metal Can |
| DG381AK | -55°C to +125°C | 14 Lead CERDIP |
| DG381AA | -55°C to +125°C | 10 Lead Metal Can |

(Ordering Information is continued on last page.)

Pin Configurations

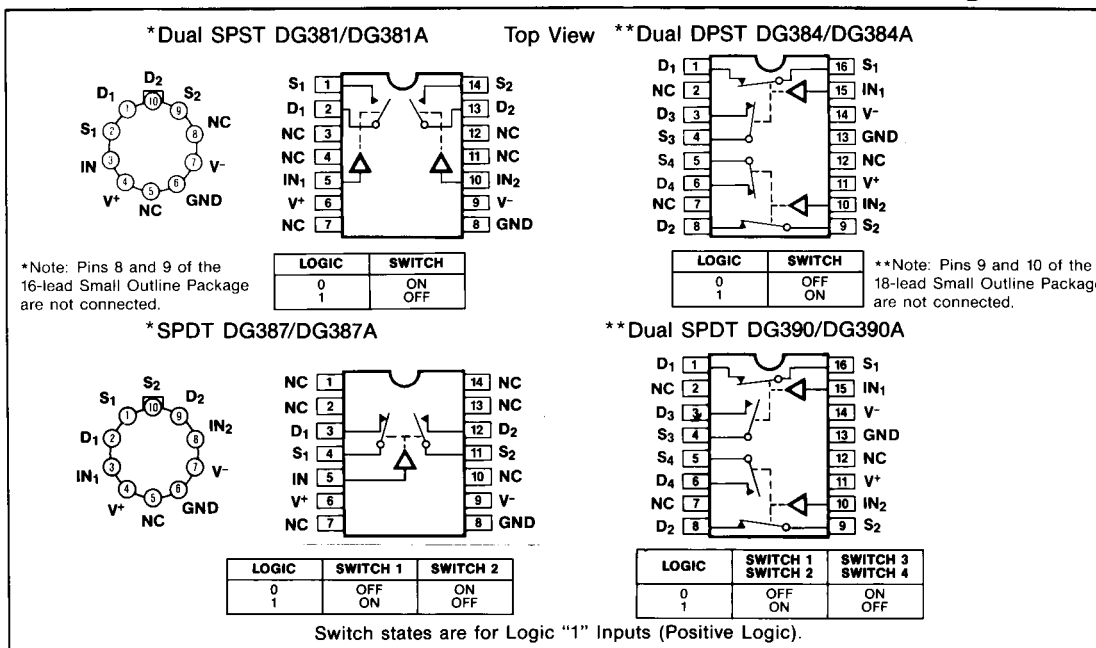

DG381(A)/DG384(A)/DG387(A)/DG390(A)



Maxim Integrated Products 1

For free samples & the latest literature: <http://www.maxim-ic.com>, or phone 1-800-998-8800

General Purpose CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS

| | | |
|--|--|----------------|
| Voltages Referenced to V ⁻ | Operating Temperature (A Suffix) | -55°C to 125°C |
| V ⁺ (DG381-DG390) | (B Suffix) | -25°C to 85°C |
| V ⁺ (DG381A-DG390A) | (C Suffix) | 0°C to 70°C |
| GND | Lead Temperature (Soldering 10 sec.) | +300°C |
| Digital Inputs, V _S , V _D (Note 1) | Power Dissipation* | |
| -4V to (V ⁺ + 4V) or | CerDip (K) (Derate 11mW/°C above 75°C) | 825mW |
| 30mA, whichever occurs first. | Plastic DIP (J) (Derate 6.5mW/°C above 25°C) | 470mW |
| Current, Any Terminal Except S or D | Metal Can (A) (Derate 6mW/°C above 75°C) | 450mW |
| 30mA | | |
| Continuous Current, S or D | | |
| 30mA | | |
| (Pulsed at 1msec, 10% duty cycle max) | | |
| 100mA | | |
| Storage Temperature (A & B Suffix) | | |
| -65°C to 150°C | | |
| (C Suffix) | | |
| -65°C to 125°C | | |

Stresses listed under "Absolute Maximum Ratings" may be applied (one at a time) to devices without resulting in permanent damage. These are stress ratings only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS (V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = 25°C, unless otherwise indicated)

| PARAMETER | SYMBOL | TEST CONDITIONS | DG381-DG390A DG381A-DG390AA | | | DG381-DG390B/C DG381A-DG390AB/C | | | UNITS | |
|--------------------------|--------------------------------|---|---|---|--|------------------------------------|-------|--------|-------|----|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | | |
| Analog Signal Range | V _{ANALOG} | I _S = 10mA, V _{in} = 0.8V or 4.0V | -15 | | 15 | -15 | | 15 | V | |
| SWITCH | Drain-Source ON Resistance | r _{DS(on)} | I _S = -10mA, V _D = 10V | | 30 | 50 | 30 | 50 | Ω | |
| | | | I _S = 10mA, V _D = -10V | | 30 | 50 | 30 | 50 | | |
| | Source OFF Leakage Current | I _{S(off)} | V _{in} = 0.8V or 4.0V | V _S = 14V, V _D = -14V | | 0.1 | 1 | 0.1 | 5 | nA |
| | | | | V _S = -14V, V _D = 14V | | -1 | -0.1 | -5 | -0.1 | |
| | Drain OFF Leakage Current | I _{D(off)} | | V _S = -14V, V _D = 14V | | 0.1 | 1 | 0.1 | 5 | |
| | | | | V _S = 14V, V _D = -14V | | -1 | -0.1 | -5 | -0.1 | |
| Drain ON Leakage Current | I _{D(on)} | V _D = V _S = 14V | | 0.1 | 1 | 0.1 | 5 | | | |
| | | V _D = V _S = -14V | | -2 | -0.1 | -5 | -0.1 | | | |
| INPUT | Input Current/Voltage High | I _{INH} | V _{in} = 5.0V | | -1 | -0.001 | -1 | -0.001 | μA | |
| | | | V _{in} = 15V | | 0.001 | 1 | 0.001 | 1 | | |
| | Input Current/Voltage Low | I _{INL} | V _{in} = 0V | | -1 | -0.001 | -1 | -0.001 | | |
| | Turn-ON Time | t _{on} | See Switching Time Test Circuit | | 150 | 300 | 150 | 300 | ns | |
| | Turn-OFF Time | t _{off} | | | 130 | 250 | 130 | 250 | | |
| | Break-Before-Make Interval | t _{on} -t _{off} | See Break-Before-Make Time Test Circuit DG387(A)/DG390(A) Only | | 50 | | 50 | | | |
| | Charge Injection | Q | C _L = 10nF, R _{gen} = 0Ω, V _{gen} = 0V | | 12 | | 12 | | pC | |
| | Source OFF Capacitance | C _{S(off)} | f = 1MHz, V _{in} = 0.8V or 4.0V | V _S = 0V | | 14 | | 14 | pF | |
| | Drain OFF Capacitance | C _{D(off)} | | V _D = 0V | | 14 | | 14 | | |
| | Channel ON Capacitance | C _{D(on)} + C _{S(on)} | | V _S = V _D = 0V | | 40 | | 40 | | |
| | Input Capacitance | C _{in} | | f = 1MHz | | 6 | | 6 | | |
| | | | | | V _{in} = 0V | 7 | | 7 | | |
| | Off Isolation (Note 4) | | | | V _{in} = 0V, R _L = 1kΩ | 62 | | 62 | dB | |
| | Crosstalk (Channel to Channel) | | | | V _S = 1 V _{RMS} , f = 500kHz | 74 | | 74 | | |

(See Notes next page).

General Purpose CMOS Analog Switches

ELECTRICAL CHARACTERISTICS (Continued)

(V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = 25°C, unless otherwise indicated)

| | PARAMETER | SYMBOL | TEST CONDITIONS | DG381-DG390A DG381A-DG390AA | | | DG381-DG390B/C DG381A-DG390AB/C | | | UNITS |
|--------|-------------------------|----------------|--|--------------------------------|--------|-----|------------------------------------|--------|-----|-------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| SUPPLY | Positive Supply Current | I ⁺ | V _{in} = 4V (One Input) (All Others = 0) | 0.23 | 0.5 | | 0.23 | 0.5 | mA | |
| | Negative Supply Current | I ⁻ | | -10 | -0.001 | | -100 | -0.001 | | |
| | Positive Supply Current | I ⁺ | V _{in} = 0.8V (All Inputs) | 0.001 | 10 | | 0.001 | 100 | μA | |
| | Negative Supply Current | I ⁻ | | -10 | -0.001 | | -100 | -0.001 | | |

ELECTRICAL CHARACTERISTICS (Over Temperature)

(V⁺ = +15V, V⁻ = -15V, GND = 0V, T_A = Over Temperature Range, unless otherwise indicated)

| | PARAMETER | SYMBOL | TEST CONDITIONS | DG381-DG390A DG381A-DG390AA | | | DG381-DG390B/C DG381A-DG390AB/C | | | UNITS |
|--------------------------|--------------------------------|--------------------------------|---|--|------|------|------------------------------------|-----|-----|-------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| SWITCH | Analog Signal Range | V _{ANALOG} | I _S = 10mA, V _{in} = 0.8V or 4.0V | -15 | 15 | | -15 | 15 | V | |
| | Drain-Source ON Resistance | r _{DS(on)} | V _{in} = 0.8V or 4.0V | I _S = -10mA, V _D = 10V | | 75 | | 75 | Ω | |
| | | | | I _S = 10mA, V _D = -10V | | 75 | | 75 | | |
| | Source OFF Leakage Current | I _{S(off)} | V _{in} = 0.8V or 4.0V | V _S = 14V, V _D = -14V | | 100 | | 100 | nA | |
| | | | | V _S = -14V, V _D = 14V | -100 | | -100 | | | |
| | Drain OFF Leakage Current | I _{D(off)} | V _{in} = 0.8V or 4.0V | V _S = -14V, V _D = 14V | | 100 | | 100 | | |
| | | | | V _S = 14V, V _D = -14V | -100 | | -100 | | | |
| Drain ON Leakage Current | I _{D(on)} | V _{in} = 0.8V or 4.0V | V _D = V _S = 14V | | 100 | | 100 | | | |
| | | | V _D = V _S = -14V | -200 | | -200 | | | | |
| INPUT | Input Current/ Voltage High | I _{INH} | V _{in} = 5.0V | -1 | | | -10 | μA | | |
| | | | V _{in} = 15V | | 1 | | 10 | | | |
| | Input Current/ Voltage Low | I _{INL} | V _{in} = 0V | -1 | | | -10 | | | |
| SUPPLY | Positive Supply Current | I ⁺ | V _{in} = 4V (One Input) (All Others = 0) | | 1 | | | 1.5 | mA | |
| | Negative Supply Current | I ⁻ | | -100 | | | -200 | | | |
| | Positive Supply Current | I ⁺ | V _{in} = 0.8V (All Inputs) | | 100 | | | 200 | μA | |
| | Negative Supply Current | I ⁻ | | -100 | | | -200 | | | |

Note 1: Signals on S_x, D_x, or IN_x exceeding V⁺ or V⁻ will be clamped by internal diodes. Limit diode forward current to maximum current ratings.


Note 2: The algebraic convention whereby the most negative value is a minimum, and the most positive value is a maximum is used in this data sheet.

Note 3: Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

Note 4: OFF isolation = 20 log $\frac{V_S}{V_D}$, V_S = input to OFF switch, V_D = Output.

General Purpose CMOS Analog Switches

Typical Operating Characteristics

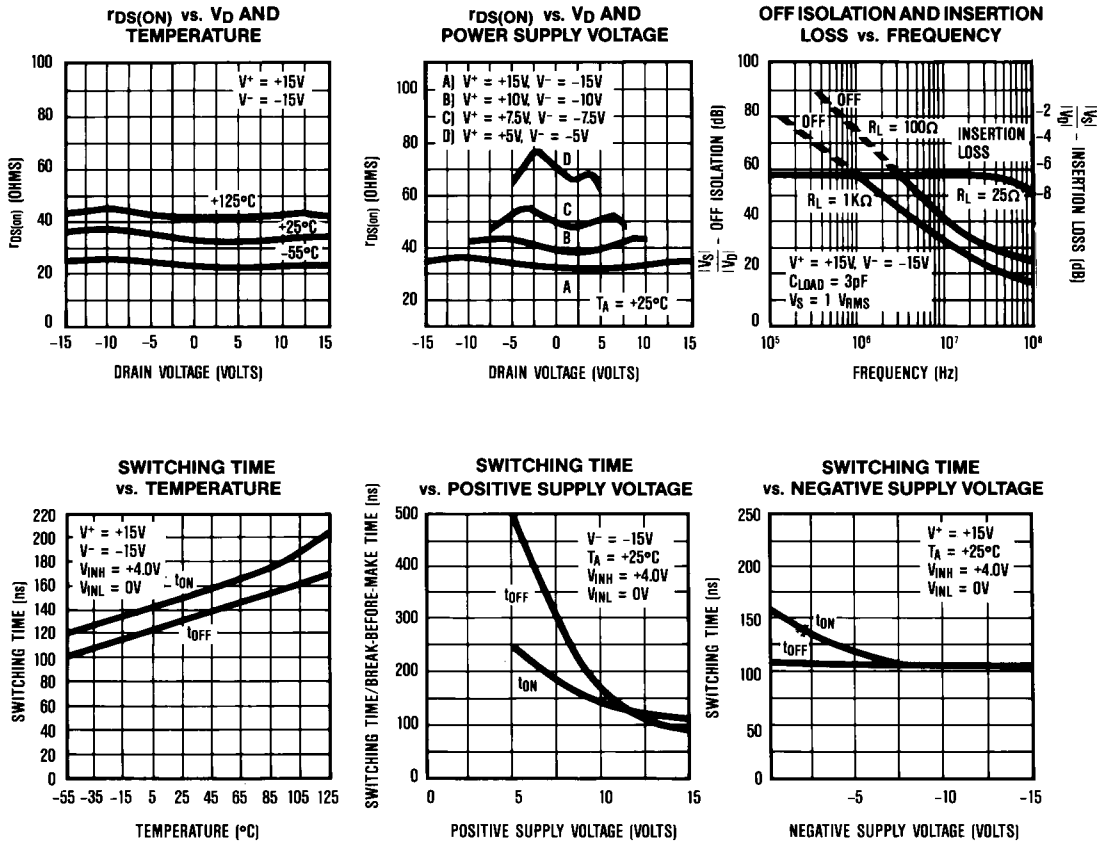

Test Circuits

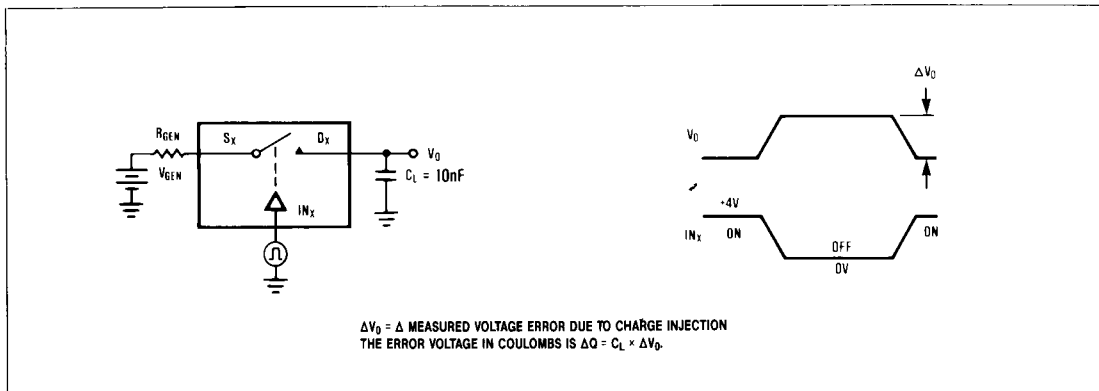


Figure 1. Charge Injection Test Circuit.

General Purpose CMOS Analog Switches

Test Circuits (Continued)

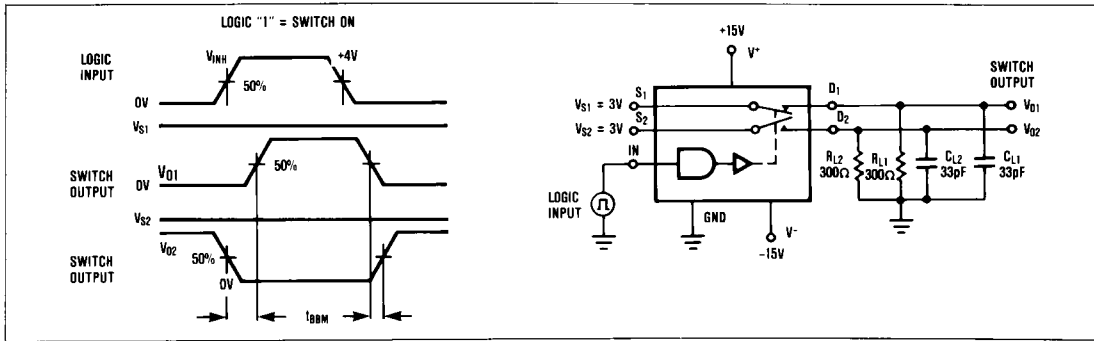


Figure 2. Break-Before-Make Time Test Circuit SPDT (DG387(A)/DG390(A)).

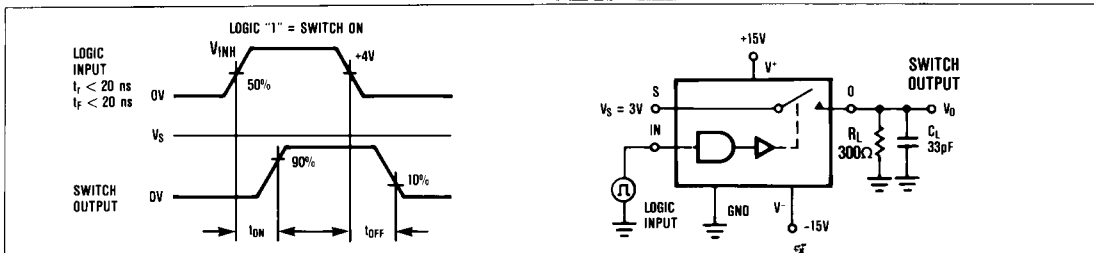


Figure 3. Switching Time Test Circuit.

Application Information

All DG381 family switches will operate with ± 5 to ± 15 V power supplies. They can also be used with single ended power supplies ranging from +10V to +30V where the V^- terminal is connected to ground. In either case analog signals ranging from V^+ to V^- can be switched.

The on resistance variation with analog signal and supply voltage is shown in the Typical Operating Characteristics graphs. The temperature coefficient of R_{ON} is typically 0.5%/°C. Typical on resistance matching from channel to channel is 10%. In addition, Table 1 outlines some typical parameters for single supply operation.

Table 1. Typical Single Supply Parameters

| | V^+ SUPPLY VOLTAGE ($V^- = 0V$) | | | |
|-------------------------------------|-------------------------------------|-------------|-------------|-------------|
| | +10V | +15V | +20V | +30V |
| Switching Time ($R_L = 1k\Omega$) | | | | |
| t_{ON} | 190ns | 150ns | 110ns | 70ns |
| t_{OFF} | 40ns | 40ns | 40ns | 40ns |
| On Resistance | | | | |
| $V_{SIGNAL} = +1V$ | 71 Ω | 51 Ω | 42 Ω | 31 Ω |
| $V_{SIGNAL} = V^+/2$ | 77 Ω | 54 Ω | 43 Ω | 30 Ω |
| $V_{SIGNAL} = V^+$ | 84 Ω | 63 Ω | 54 Ω | 43 Ω |
| Input Logic Levels | 0.8V, 4.0V | 0.8V, 4.0V | 0.8V, 4.0V | 0.8V, 4.5V |

The charge injection test circuit is shown in Figure 1. Table 2 lists the typical injected charge for DG381 series switches with various input voltages.

Table 2. Charge Injection ($\pm 15V$ Supplies)

| ANALOG INPUT | INJECTED Q |
|--------------|------------|
| +10V | 4pC |
| +5V | 8pC |
| 0V | 12pC |
| -5V | 8pC |
| -10V | 5pC |


DG381(A)/DG384(A)/DG387(A)/DG390(A)

DG381(A)/DG384(A)/DG387(A)/DG390(A)

General Purpose CMOS Analog Switches

Chip Topography

Ordering Information (continued)

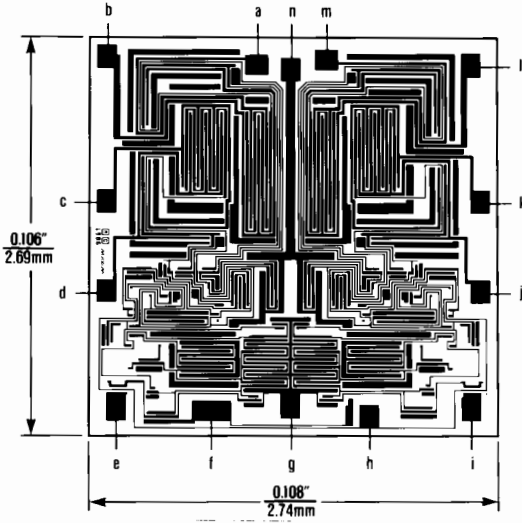

| DIE PAD | DG381 DG381A | DG387 DG387A | DG384/390 DG384A/390A |
|---------|-----------------|-----------------|--------------------------|
| a | N.C. | N.C. | S3 |
| b | D1 | D1 | D3 |
| c | D1 | S1 | D1 |
| d | S1 | IN1 | S1 |
| e | IN1 | IN1 | IN1 |
| f | V ⁺ | V ⁺ | V ⁺ |
| g | GND | GND | GND |
| h | V ⁻ | V ⁻ | V ⁻ |
| i | IN2 | GND | IN2 |
| j | S2 | V ⁻ | S2 |
| k | D2 | S2 | D2 |
| l | D2 | D2 | D4 |
| m | N.C. | N.C. | S4 |
| n | V ⁺ | V ⁺ | V ⁺ |

Ordering Information (continued)



| PART | TEMP. RANGE | PACKAGE |
|-----------|-----------------|---------------------|
| DG381AC/D | 0°C to +70°C | Dice |
| DG381ACJ | 0°C to +70°C | 14 Lead Plastic DIP |
| DG381ACWE | 0°C to +70°C | 16 Lead Wide SO |
| DG381ACK | 0°C to +70°C | 14 Lead CERDIP |
| DG381ABWE | -25°C to +85°C | 16 Lead Wide SO |
| DG381ABK | -25°C to +85°C | 14 Lead CERDIP |
| DG381ABA | -25°C to +85°C | 10 Lead Metal Can |
| DG384C/D | 0°C to +70°C | Dice |
| DG384CJ | 0°C to +70°C | 16 Lead Plastic DIP |
| DG384CWE | 0°C to +70°C | 16 Lead Wide SO |
| DG384CK | 0°C to +70°C | 16 Lead CERDIP |
| DG384BWE | -25°C to +85°C | 16 Lead Wide SO |
| DG384BK | -25°C to +85°C | 16 Lead CERDIP |
| DG384AK | -55°C to +125°C | 16 Lead CERDIP |
| DG384AC/D | 0°C to +70°C | Dice |
| DG384ACJ | 0°C to +70°C | 16 Lead Plastic DIP |
| DG384ACWE | 0°C to +70°C | 16 Lead Wide SO |
| DG384ACK | 0°C to +70°C | 16 Lead CERDIP |
| DG384ABWE | -25°C to +85°C | 16 Lead Wide SO |
| DG384ABK | -25°C to +85°C | 16 Lead CERDIP |
| DG387C/D | 0°C to +70°C | Dice |
| DG387CJ | 0°C to +70°C | 14 Lead Plastic DIP |
| DG387CWE | 0°C to +70°C | 16 Lead Wide SO |
| DG387CK | 0°C to +70°C | 14 Lead CERDIP |
| DG387BWE | -25°C to +85°C | 16 Lead Wide SO |

| PART | TEMP. RANGE | PACKAGE |
|-----------|-----------------|---------------------|
| DG387BK | -25°C to +85°C | 14 Lead CERDIP |
| DG387BA | -25°C to +85°C | 10 Lead Metal Can |
| DG387AK | -55°C to +125°C | 14 Lead CERDIP |
| DG387AA | -55°C to +125°C | 10 Lead Metal Can |
| DG387AC/D | 0°C to +70°C | Dice |
| DG387ACJ | 0°C to +70°C | 14 Lead Plastic DIP |
| DG387ACWE | 0°C to +70°C | 16 Lead Wide SO |
| DG387ACK | 0°C to +70°C | 14 Lead CERDIP |
| DG387ABWE | -25°C to +85°C | 16 Lead Wide SO |
| DG387ABK | -25°C to +85°C | 14 Lead CERDIP |
| DG387ABA | -25°C to +85°C | 10 Lead Metal Can |
| DG390C/D | 0°C to +70°C | Dice |
| DG390CJ | 0°C to +70°C | 16 Lead Plastic DIP |
| DG390CWE | 0°C to +70°C | 16 Lead Wide SO |
| DG390CK | 0°C to +70°C | 16 Lead CERDIP |
| DG390BWE | -25°C to +85°C | 16 Lead Wide SO |
| DG390BK | -25°C to +85°C | 16 Lead CERDIP |
| DG390AK | -55°C to +125°C | 16 Lead CERDIP |
| DG390AC/D | 0°C to +70°C | Dice |
| DG390ACJ | 0°C to +70°C | 16 Lead Plastic DIP |
| DG390ACWE | 0°C to +70°C | 16 Lead Wide SO |
| DG390ACK | 0°C to +70°C | 16 Lead CERDIP |
| DG390ABWE | -25°C to +85°C | 16 Lead Wide SO |
| DG390ABK | -25°C to +85°C | 16 Lead CERDIP |

General Purpose CMOS Analog Switches

Package Information


DG381(A)/DG384(A)/DG387(A)/DG390(A)

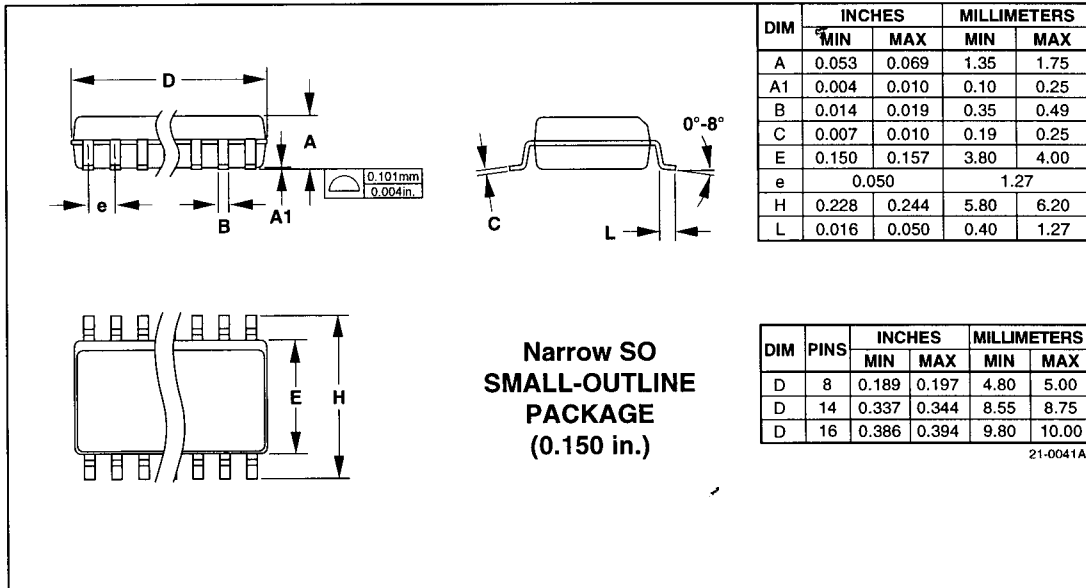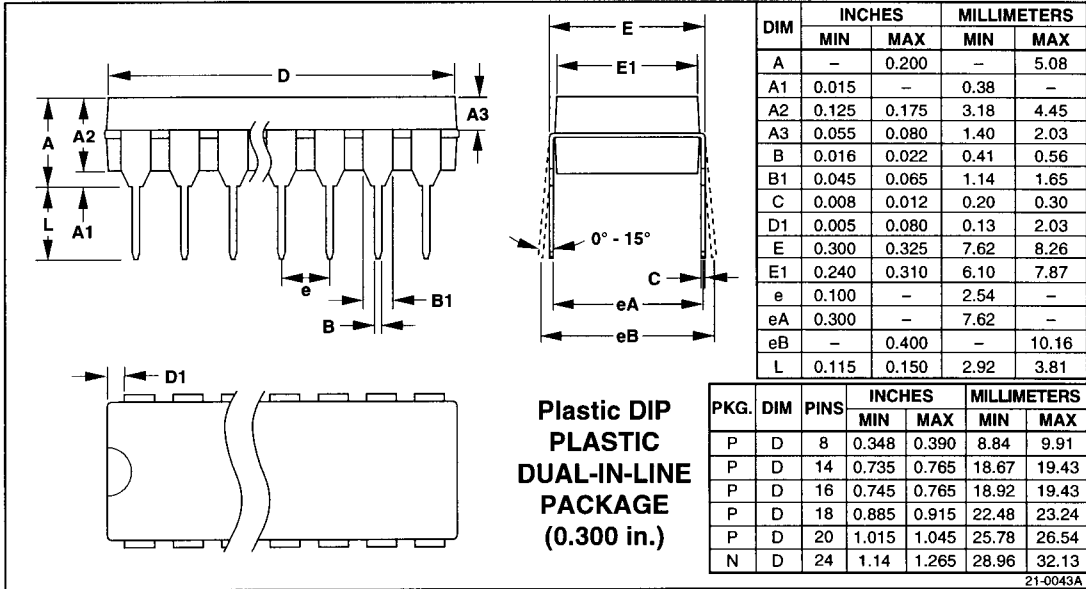

General Purpose CMOS Analog Switches

DG381(A)/DG384(A)/DG387(A)/DG390(A)

Package Information (continued)

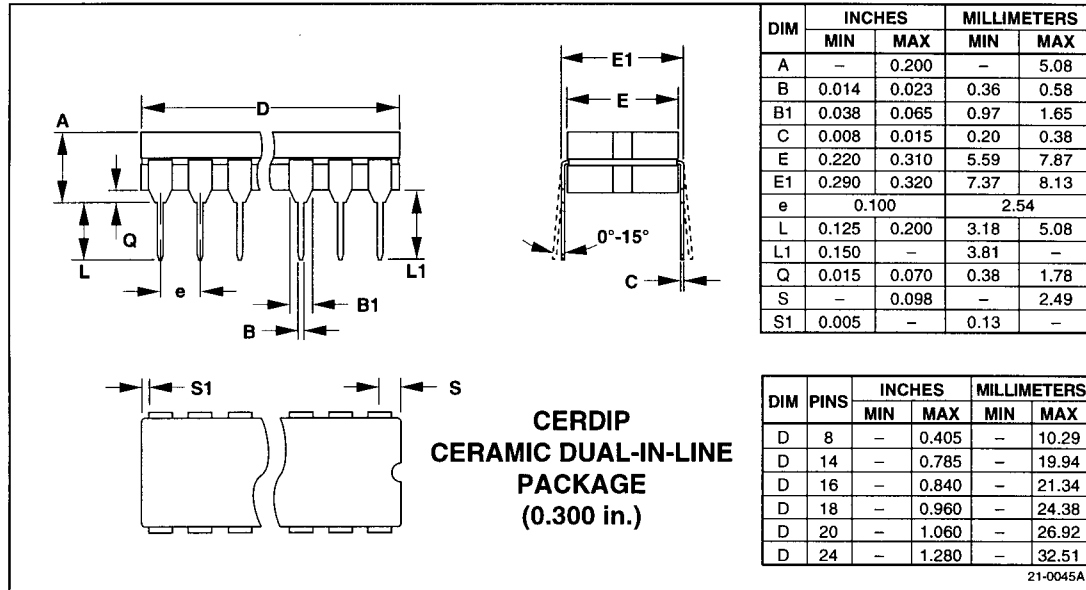

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600**

© 1995 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.