

MOSPEC

COMPLEMENTARY SILICON POWER TRANSISTORS

...designed for various specific and general purpose application such as; output and driver stages of amplifiers operating at frequencies from DC to greater than 1.0MHz series, shunt and switching regulators; low and high frequency inverters/converters and many others.

FEATURES:


- * Very Low Collector Saturation Voltage
- * Excellent Linearity
- * Fast Switching
- * PNP Values are Negative, Observe Proper Polarity.

NPN	PNP
D44VM	D45VM
Series	Series


**8 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
30-80 VOLTS
50 WATTS**

MAXIMUM RATINGS

Characteristic	Symbol	D44VM1 D45VM1	D44VM4 D45VM4	D44VM7 D45VM7	D44VM10 D45VM10	Unit
Collector-Emitter Voltage	V_{CEO}	30	45	60	80	V
Collector-Emitter Voltage	V_{CEV}	50	70	80	100	V
Emitter-Base Voltage	V_{EBO}	7.0				V
Collector Current - Continuous Peak	I_C I_{CM}	8.0 16				A
Base Current	I_B	1.5				A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	50 0.4				W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150				$^\circ C$



TO-220




PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta JC}$	2.5	$^\circ C/W$

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

FIGURE -1 POWER DERATING

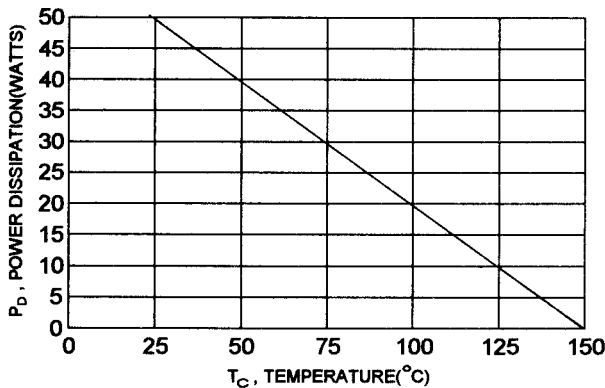

D44VM Series NPN / D45VM Series PNP

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Base Cutoff Current ($V_{CEV} = \text{Rated Value}$, $v_{BE(OFF)} = 4.0\text{ V}$) ($V_{CEV} = \text{Rated Value}$, $v_{BE(OFF)} = 4.0\text{ V}$, $T_c = 100^\circ\text{C}$)	I_{CEV}		10 100	μA
Emitter-Base Cutoff Current ($V_{BE} = 7.0\text{ V}$, $I_C = 0$)	I_{EBO}		10	μA

ON CHARACTERISTICS(1)

DC Current Gain ($I_C = 4.0\text{ A}$, $V_{CE} = 1.0\text{ V}$) ($I_C = 6.0\text{ A}$, $V_{CE} = 1.0\text{ V}$) ($I_C = 8.0\text{ A}$, $V_{CE} = 1.0\text{ V}$)	D44VM Series D45VM Series D44VM Series D45VM Series	hFE	40 20 20 10	
Collector-Emitter Saturation Voltage ($I_C = 4.0\text{ A}$, $I_B = 400\text{ mA}$) ($I_C = 8.0\text{ A}$, $I_B = 800\text{ mA}$) ($I_C = 8.0\text{ A}$, $I_B = 800\text{ mA}$, $T_c = 100^\circ\text{C}$)		$V_{CE(sat)}$	0.8 1.2 1.5	V
Base-Emitter Saturation Voltage ($I_C = 8.0\text{ A}$, $I_B = 800\text{ mA}$) ($I_C = 8.0\text{ A}$, $I_B = 800\text{ mA}$, $T_c = 100^\circ\text{C}$)		$V_{BE(sat)}$	1.5 1.6	V

DYNAMIC CHARACTERISTICS

Current-Gain Bandwidth Product (2) ($I_C = 100\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	30(typ)		MHz
---	-------	---------	--	-----


SWITCHING CHARACTERISTICS

Rise Time	$V_{CC} = 30\text{V}$ $I_C = 8\text{A}$, $I_{B1} = -I_{B2} = 800\text{mA}$	D44VM Series	t_r	0.5	μs
Storage Time		D45VM Series		0.6	
		D44VM Series	t_s	1.3	μs
Fall Time		D45VM Series		1.1	
		D44VM Series	t_f	0.4	μs
		D45VM Series		0.5	


(1) Pulse Test: Pulse width = 300 μs , Duty Cycle $\leq 2.0\%$

(2) $f_T = |h_{re}| \cdot f_{max}$


DC CURRENT GAIN

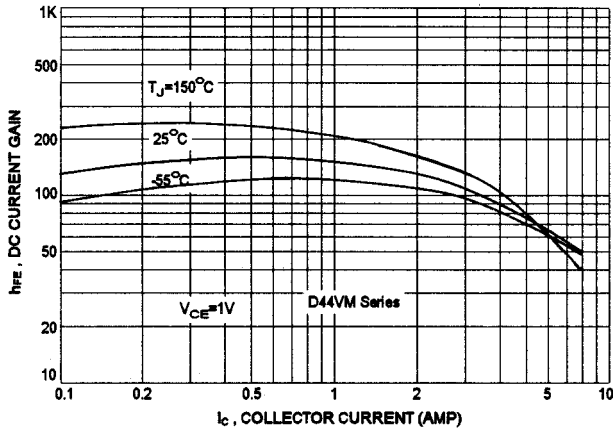


DC CURRENT GAIN

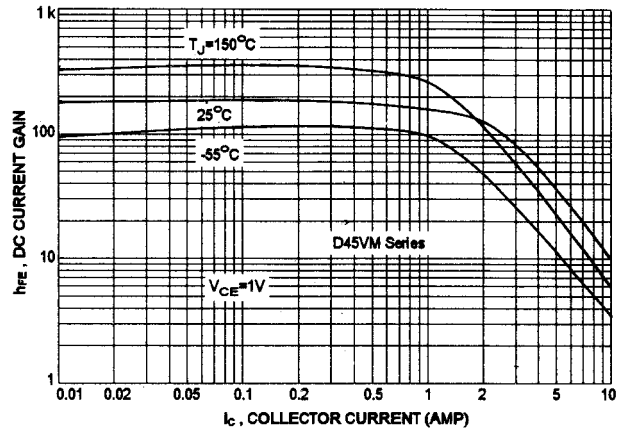

COLLECTOR-EMITTER SATURATION VOLTAGE

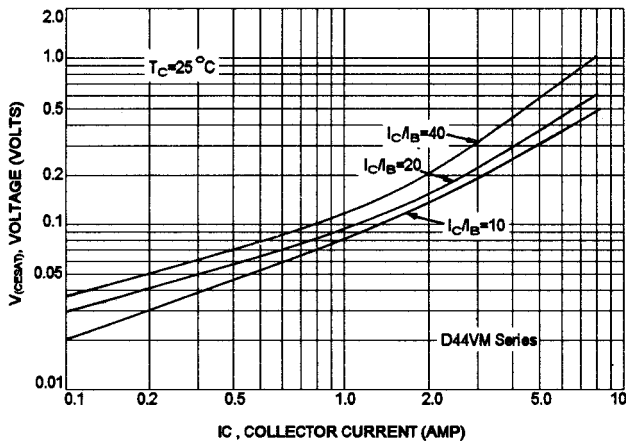


COLLECTOR-EMITTER SATURATION VOLTAGE

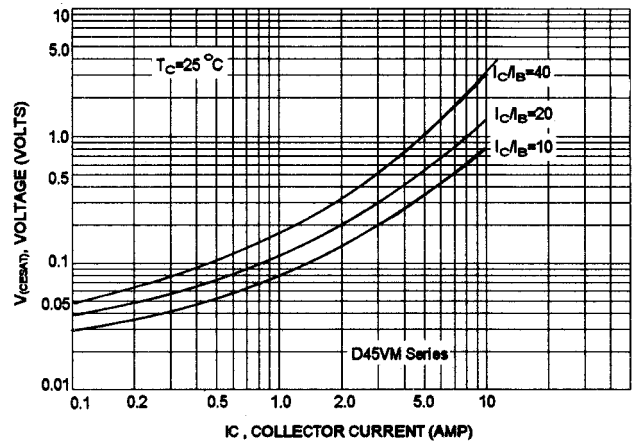


D44VM/D45VM

FORWARD-BIAS SAFE OPERATING AREA

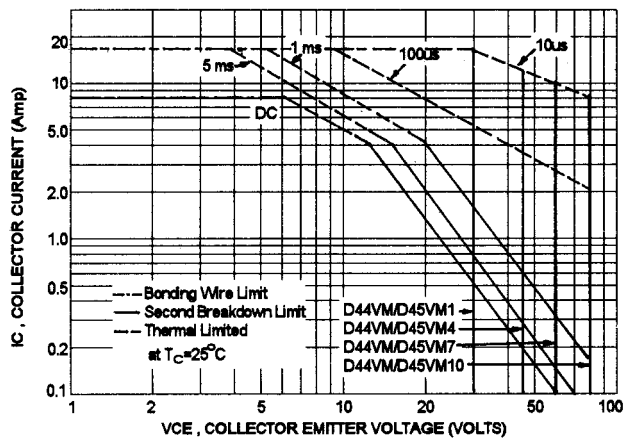

D44VM/D45VM

REVERSE-BIAS SAFE OPERATING AREA

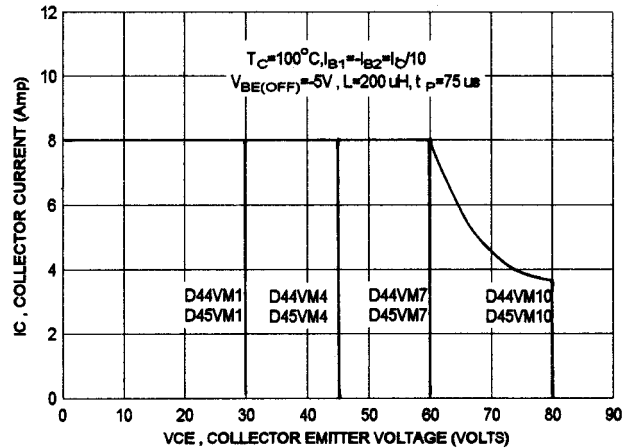



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.