

COMPLEMENTARY SILICON POWER TRANSISTORS

...designed for various specific and general purpose application such as; output and driver stages of amplifiers operating at frequencies from DC to greater than 1.0MHz; series, shunt and switching regulators; low and high frequency inverters/converters and many others.

FEATURES:


- * NPN Complement to D45H PNP
- * Very Low Collector Saturation Voltage
- * Excellent Linearity
- * Fast Switching
- * PNP Values are Negative, Observe Proper Polarity.

NPN	PNP
D44H	D45H
Series	Series


10 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
30-80 VOLTS
50 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	D44H1,2 D45H1,2	D44H4,5 D45H4,5	D44H7,8 D45H7,8	D44H10,11 D45H10,11	Unit
Collector-Emitter Voltage	V_{CEO}	30	45	60	80	V
Collector-Emitter Voltage	V_{CES}	30	45	60	80	V
Emitter-Base Voltage	V_{EBO}	5				V
Collector Current - Continuous Peak	I_C I_{CM}	10 20				A
Base Current	I_B	2				A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	50 0.4				W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150				$^\circ C$



TO-220




PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta JC}$	2.5	$^\circ C/W$

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

FIGURE -1 POWER DERATING

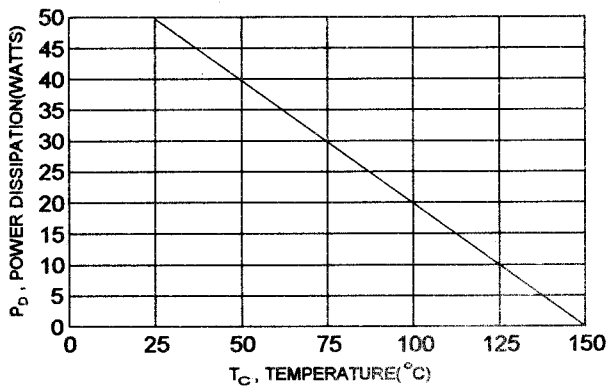

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ($I_C = 30\text{mA}$, $I_B = 0$)	D44H1,2 D44H4,5 D44H7,8 D44H10,11	D45H1,2 D45H4,5 D45H7,8 D45H10,11	$V_{CE(sus)}$	30 45 60 80		V
Collector-Emitter Cutoff Current ($V_{CE} = 30\text{V}$, $V_{BE} = 0$) ($V_{CE} = 45\text{V}$, $V_{BE} = 0$) ($V_{CE} = 60\text{V}$, $V_{BE} = 0$) ($V_{CE} = 80\text{V}$, $V_{BE} = 0$)	D44H1,2 D44H4,5 D44H7,8 D44H10,11	D45H1,2 D45H4,5 D45H7,8 D45H10,11	I_{CES}		10 10 10 10	μA
Emitter-Base Cutoff Current ($V_{BE} = 5\text{V}$, $I_C = 0$)			I_{EBO}		100	μA

ON CHARACTERISTICS(1)

DC Current Gain ($I_C = 2.0\text{A}$, $V_{CE} = 1.0\text{V}$) ($I_C = 4.0\text{A}$, $V_{CE} = 1.0\text{V}$)	D44H1,4,7,10 /D45H1,4,7,10 D44H2,5,8,11 /D45H2,5,8,11 D44H1,4,7,10 /D45H1,4,7,10 D44H2,5,8,11 /D45H2,5,8,11	h_{FE}	35 60 20 40			
Collector-Emitter Saturation Voltage ($I_C = 8.0\text{A}$, $I_B = 800\text{mA}$) ($I_C = 8.0\text{A}$, $I_B = 400\text{mA}$)	D44H1,4,7,10 /D45H1,4,7,10 D44H2,5,8,11 /D45H2,5,8,11	$V_{CE(sat)}$		1.0 1.0		V
Base-Emitter Saturation Voltage ($I_C = 8.0\text{A}$, $I_B = 800\text{mA}$)	ALL Devices	$V_{BE(sat)}$		1.5		V

DYNAMIC CHARACTERISTICS

Current-Gain Bandwidth Product (2) ($I_C = 500\text{mA}$, $V_{CE} = 10\text{V}$, $f = 0.5\text{MHz}$)	D44H Series D45H Series	f_T	15 12			MHz
Output Capacitance ($V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1.0\text{MHz}$)	D44H Series D45H Series	C_{ob}	220 400			PF


SWITCHING CHARACTERISTICS

Rise Time	$I_C = 5\text{A}$, $I_{B1} = -I_{B2} = 500\text{mA}$	D44H Series D45H Series	t_r	0.5 0.6		μs
Storage Time		D44H Series D45H Series	t_s	1.0 1.2		μs
Fall Time		D44H Series D45H Series	t_f	0.4 0.5		μs


(1) Pulse Test: Pulse width = 300 μs , Duty Cycle $\leq 2.0\%$

(2) $f_T = |h_{fe}| \cdot f_{test}$


DC CURRENT GAIN

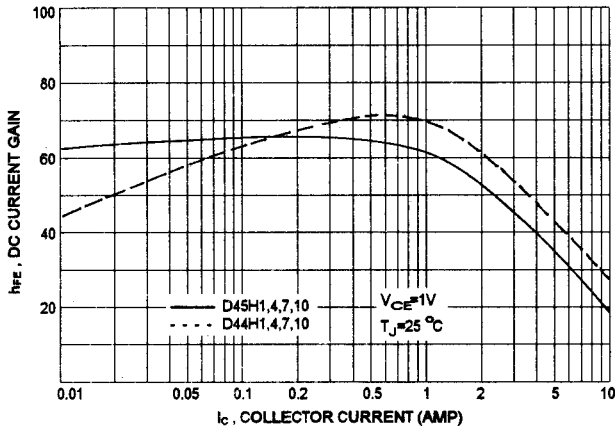


DC CURRENT GAIN

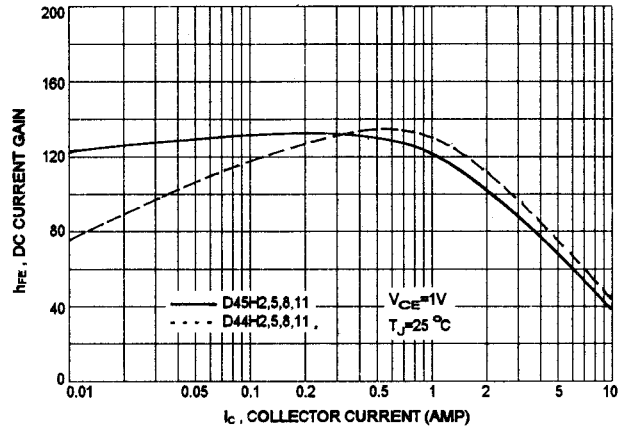


"ON" VOLTAGES

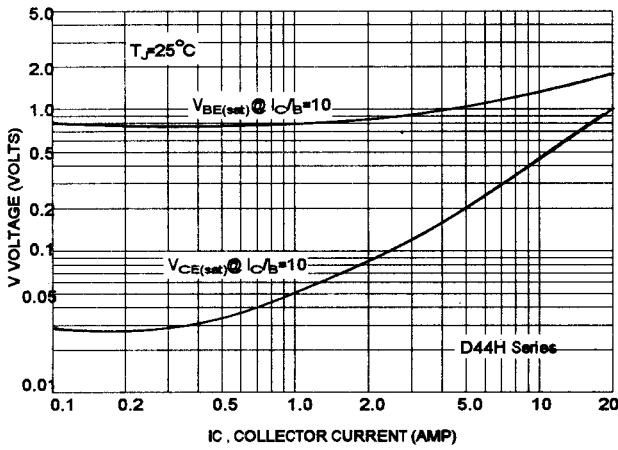

"ON" VOLTAGES

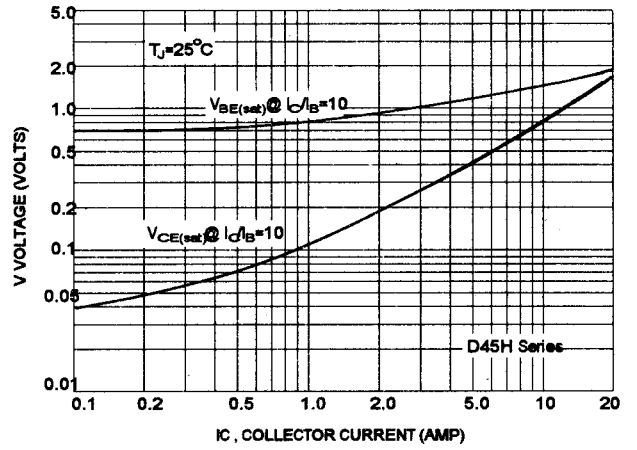

FORWARD BIAS SAFE OPERATING AREA

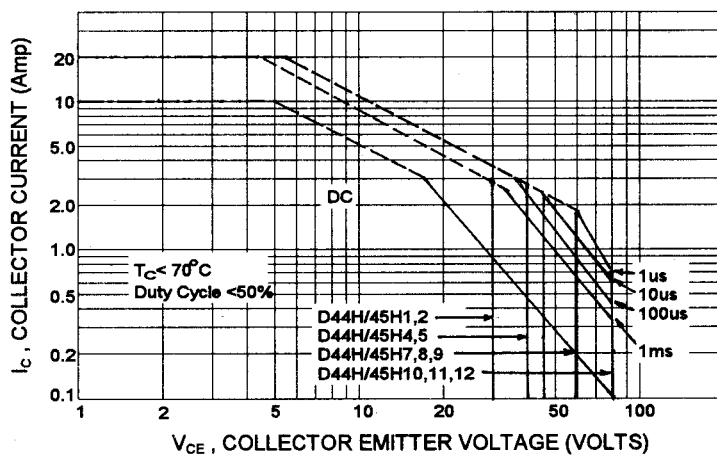



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.