

SHINDENGEN

Super Fast Recovery Rectifiers

Single

D2FL20U

200V 1.5A


FEATURES

Small SMT
Low noise
trr35ns

APPLICATION

Switching power supply
DC/DC converter
Free Wheel
Home Appliances, Office Equipment
Telecommunication, Factory Automation

OUTLINE DIMENSIONS

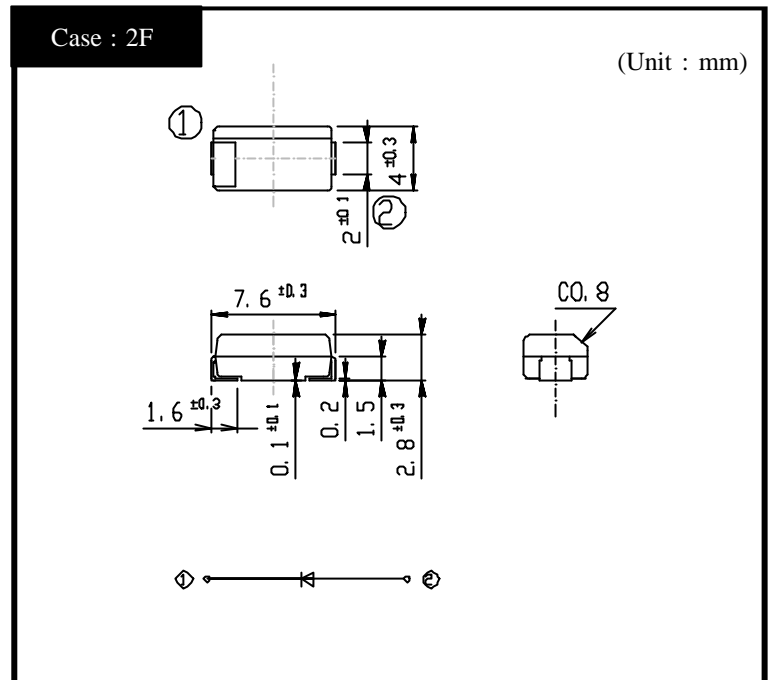

RATINGS

Absolute Maximum Ratings (If not specified $T_I=25$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55 ~ 150	
Operating Junction Temperature	T_j		150	
Maximum Reverse Voltage	V_{RM}		200	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load, $T_a=25$ On alumina substrate	1.5	A
		50Hz sine wave, R-load, $T_a=25$ On glass-epoxy substrate	1.2	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25$	50	A

Electrical Characteristics (If not specified $T_I=25$)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=1.5A$, Pulse measurement	Max.0.98	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.10	μA
Reverse Recovery Time	t_{rr}	$I_F=0.5A$, $I_R=1A$	Max.35	ns
Thermal Resistance	θ_{jl}	junction to lead	Max.24	/W
	θ_{ja}	junction to ambient, On alumina substrate	Max.90	
		junction to ambient, On glass-epoxy substrate	Max.120	

D2FL20U


Forward Voltage

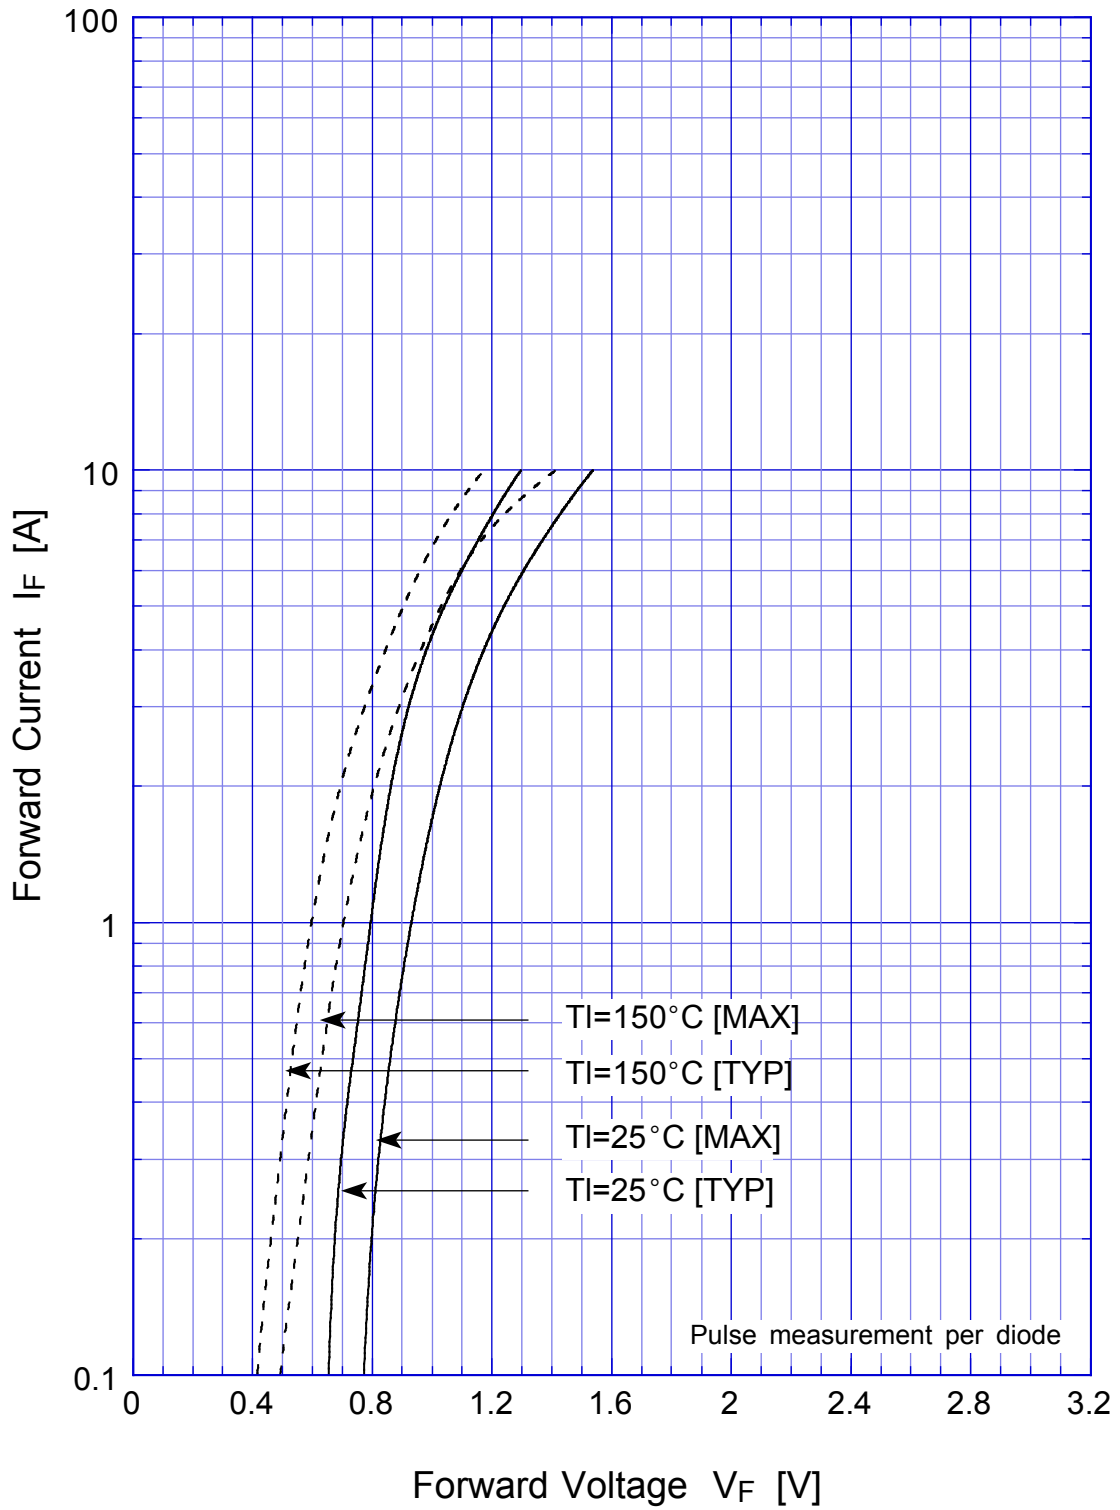

D2FL20U Forward Power Dissipation

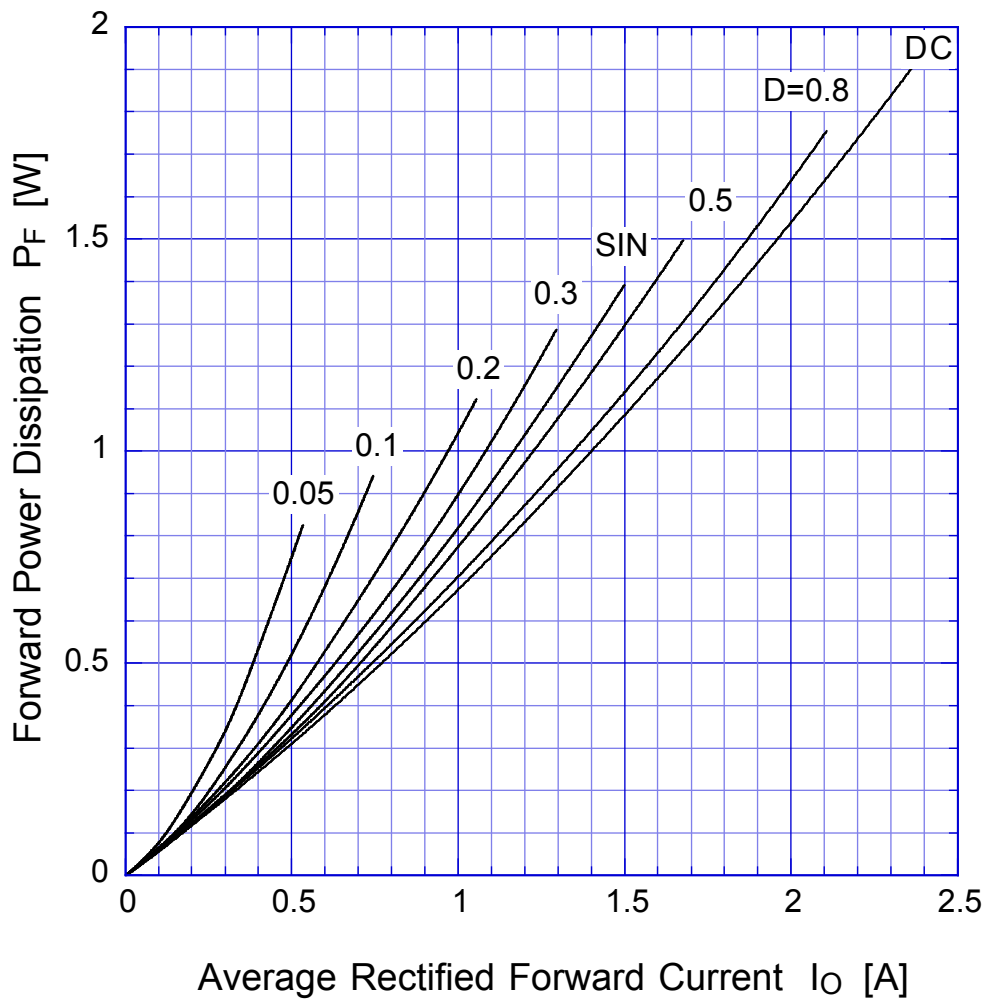


$T_j = T_{jmax}$

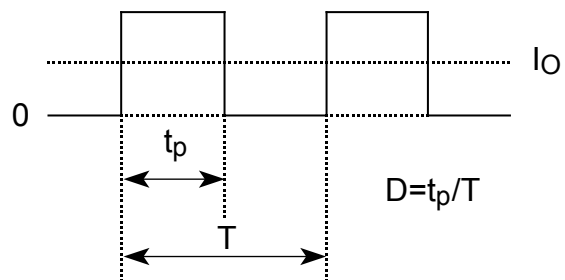

D2FL20U

Derating Curve

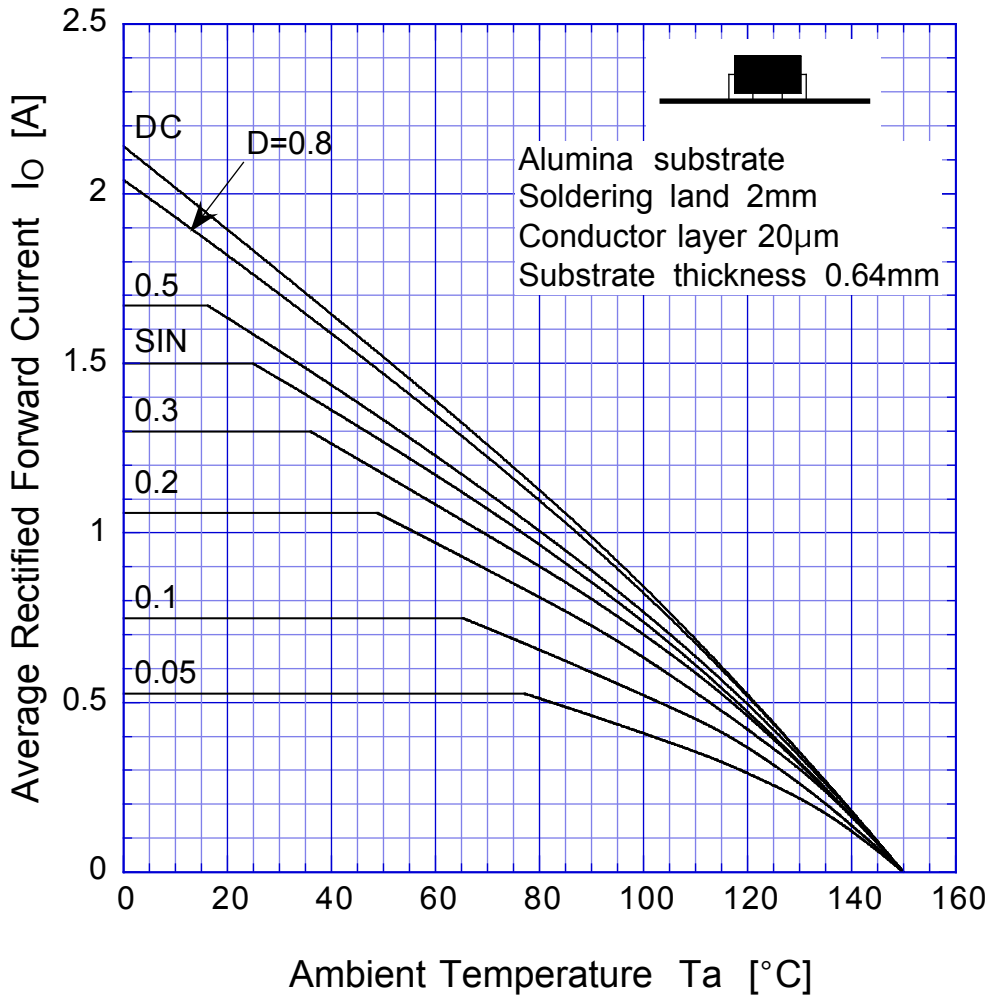


$$V_R = V_{RM}$$



D2FL20U

Derating Curve

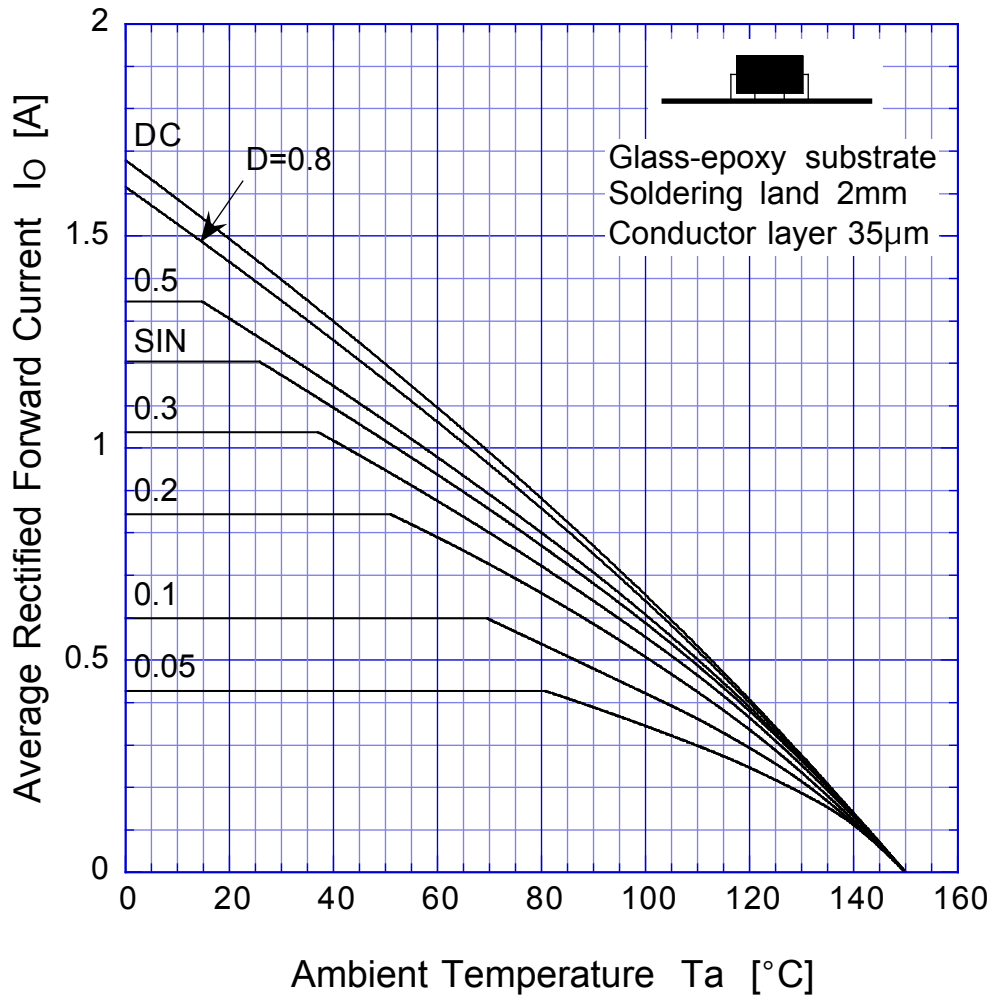


$$V_R = V_{RM}$$




D2FL20U

Peak Surge Forward Capability

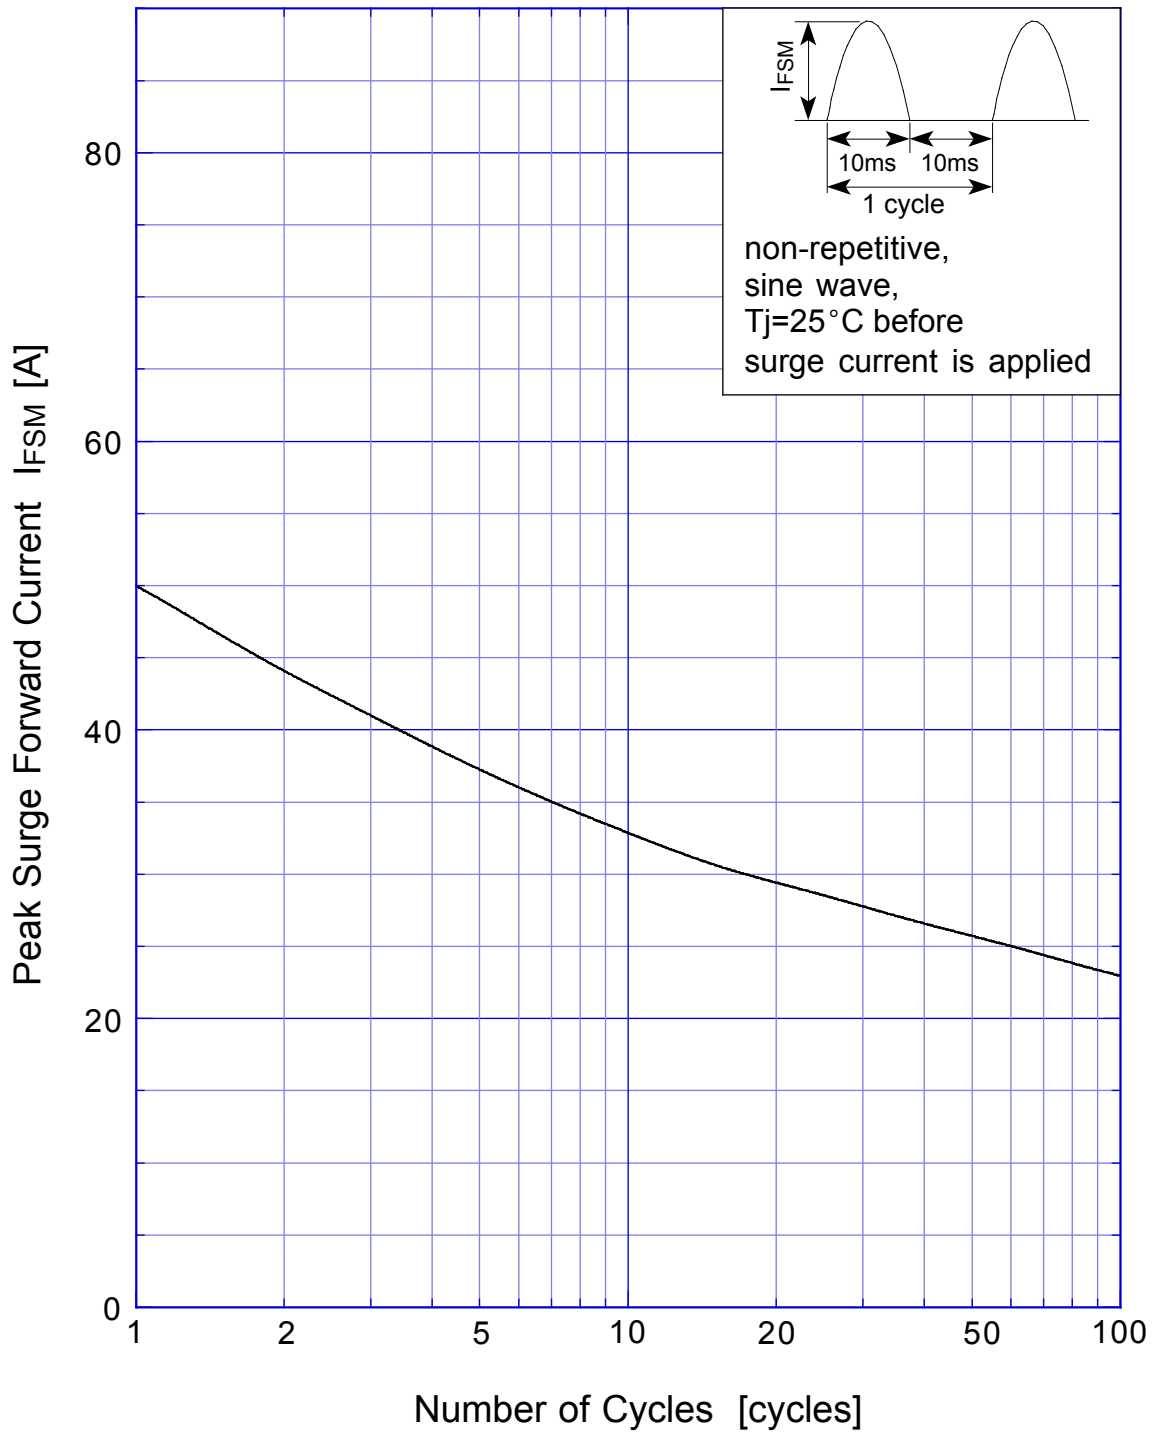

D2FL20U Junction Capacitance

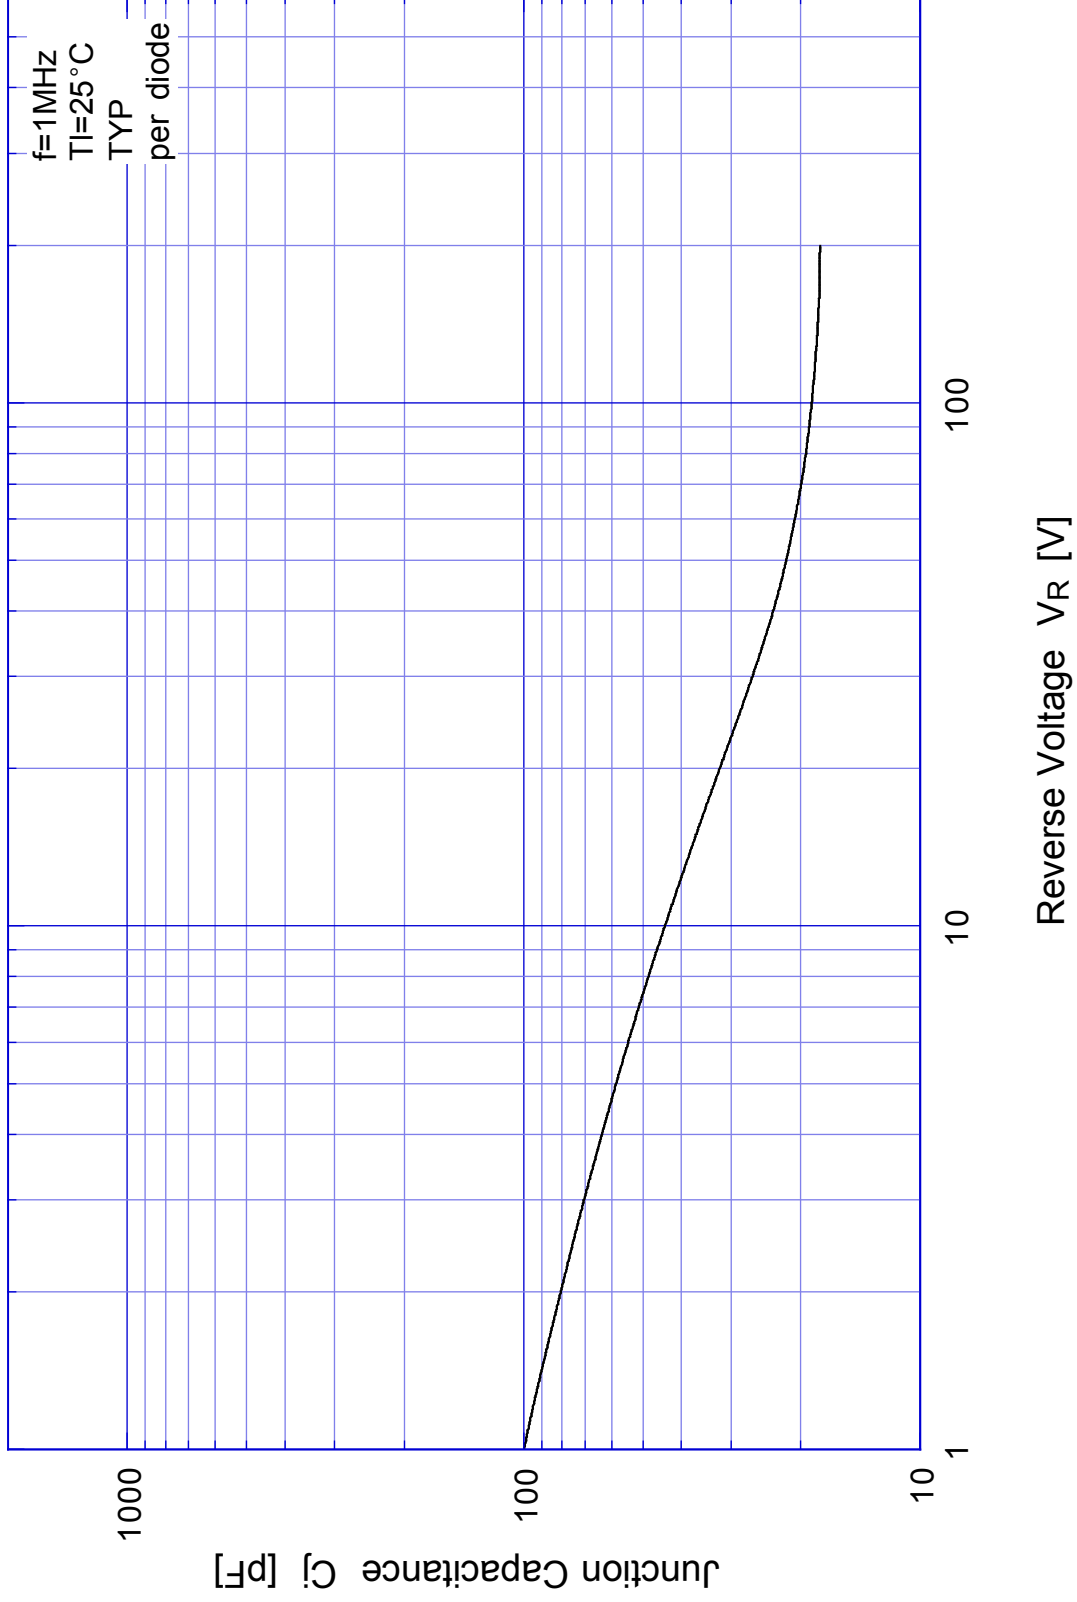

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.