

SHINDENGEN

Schottky Rectifiers (SBD)

Modules

D240SC6MH

60V 240A


FEATURES

- High capacity modules
- Low VF
- Small jc
- Built-in fuse

APPLICATION

- Big switching power supply
- DC/DC converter
- Mainframe
- IC tester

OUTLINE DIMENSIONS

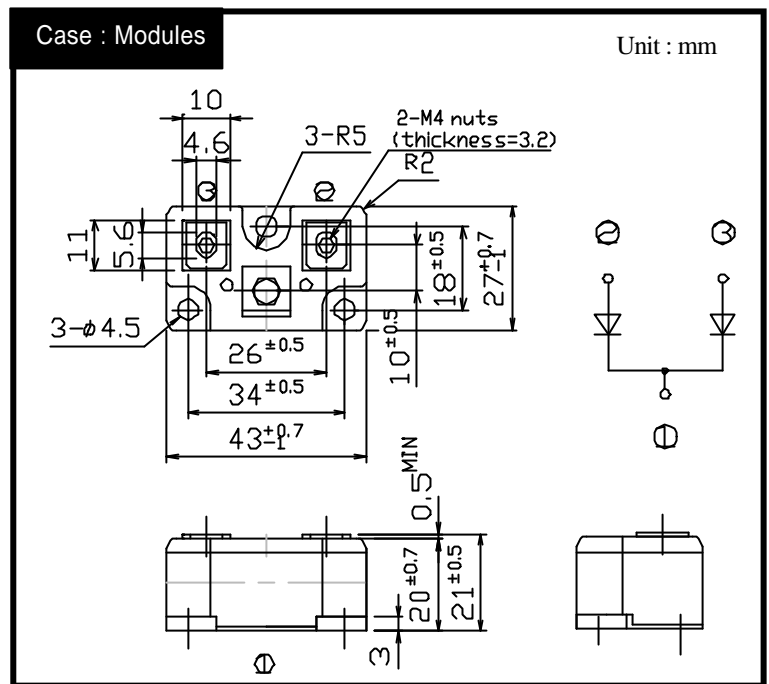

RATINGS

Absolute Maximum Ratings (If not specified Tc=25)

Item	Symbol	Conditions	Ratings	Units
Storage Temperature	Tstg		-40 ~ 125	
Operating Junction Temperature	Tj		125	
Maximum Reverse Voltage	V _{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 100ns, duty 1/100	65	V
Average Rectified Forward Current	I _o	50Hz sine wave, R-load, Rating for each arm I _o /2, Tc=71	240	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, Rating of per arm Tj=125	1600	A
Mounting Torque	TOR		1.7	N·m

Electrical Characteristics (If not specified Tc=25)

Item	Symbol	Conditions	Ratings	Units
Forward Voltage	V _F	IF=120A, Pulse measurement, Rating of per arm	Max.0.67	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per arm	Max.80	mA
Junction Capacitance	Cj	f=1MHz, V _R =10V, Rating of per arm	TYP 4.4	nF
Thermal Resistance	jc	junction to case	Max.0.23	/W
	cf	case to heatsink, Mounting torque = 1.7N·m	Max.0.12	

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.