





C441

T-25-20

Powerex, Inc. Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272  
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

**Phase Control SCR**  
**750 Amperes Avg**  
**1300-1800 Volts**

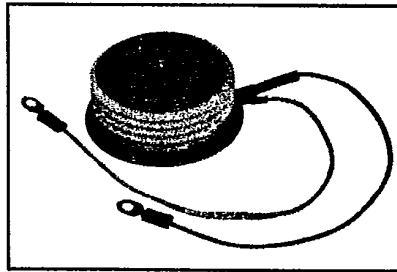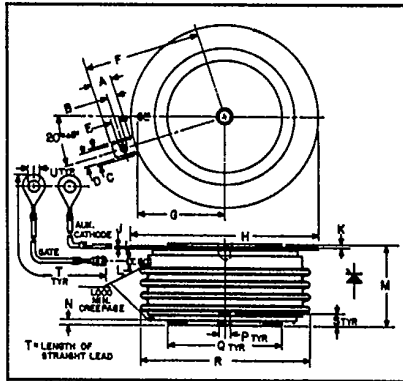

**C441**  
**Phase Control SCR**  
 750 Amperes/1300-1800 Volts

**C441**  
**Outline Drawing**

| Dimensions | Inches |        | Millimeters |        |
|------------|--------|--------|-------------|--------|
|            | Min.   | Max.   | Min.        | Max.   |
| A          | .240   | .260   | 6.096       | 6.604  |
| B          | .110   | .130   | 2.794       | 3.302  |
| C          | .245   | —      | 6.223       | —      |
| D          | .186   | .191   | 4.724       | 4.851  |
| E          | .060   | .075   | 1.524       | 1.905  |
| F          | —      | 1.430  | —           | 36.32  |
| G          | —      | 1.065  | —           | 27.051 |
| H          | 2.200  | 2.500  | 55.88       | 63.50  |
| J          | .011   | .019   | 2.794       | 3.483  |
| K          | .030   | .130   | .762        | 3.302  |
| L          | .056   | .060   | 1.422       | 1.524  |
| M          | 1.000  | 1.065  | 25.40       | 27.05  |
| N          | .030   | .096   | .762        | 2.438  |
| P          | .130   | .150   | 3.302       | 3.810  |
| Q          | 1.300  | 1.345  | 33.02       | 34.16  |
| R          | —      | 2.150  | —           | 54.61  |
| S          | .067   | .083   | 1.702       | 2.110  |
| T          | 12.200 | 12.360 | 309.9       | 313.9  |
| U          | .137   | .153   | 3.480       | 3.886  |

**Description**

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

**Features:**

- Low On-State Voltage
- High di/dt
- High dv/dt
- Hermetic Packaging
- Excellent Surge and I<sup>2</sup>t Ratings

**Applications:**

- Power Supplies
- Battery Chargers
- Motor Control
- Light Dimmers
- VAR Generators

**Ordering Information**

Example: Select the complete six digit part number you desire from the table - i.e. C441PM is a 1600 Volt, 750 Ampere Phase Control SCR.

| Type | Voltage                              |      | Current |
|------|--------------------------------------|------|---------|
|      | V <sub>ORM</sub><br>V <sub>RRM</sub> | Code |         |
| C441 | 1300                                 | PC   | 750     |
|      | 1400                                 | PD   |         |
|      | 1500                                 | PE   |         |
|      | 1600                                 | PM   |         |
|      | 1700                                 | PS   |         |
|      | 1800                                 | PN   |         |



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

#### C441

Phase Control SCR

750 Amperes Avg/1300-1800 Volts

### Absolute Maximum Ratings

|   | Symbol       | C441         | Units              |
|---|--------------|--------------|--------------------|
| RMS On-State Current  | $I_{T(RMS)}$ | 1175         | Amperes            |
| Average On-State Current                                      | $I_{T(av)}$  | 750          | Amperes            |
| Peak One-Cycle Surge (Non Repetitive) On-State Current (60Hz) | $I_{TSM}$    | 11,000       | Amperes            |
| Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz) | $I_{TSM}$    | 10,000       | Amperes            |
| Critical Rate-of-Rise of On-State Current (Non-Repetitive)    | $di/dt$      | 150          | Amperes/ $\mu$ s   |
| Critical Rate-of-Rise of On-State Current (Repetitive)        | $di/dt$      | 75           | Amperes/ $\mu$ s   |
| $I^2t$ (for Fusing), One Cycle at 60Hz                        | $I^2t$       | 500,000      | A <sup>2</sup> sec |
| Peak Gate Power Dissipation                                   | $P_{GM}$     | 200          | Watts              |
| Average Gate Power Dissipation                                | $P_{G(av)}$  | 5            | Watts              |
| Storage Temperature   | $T_{STG}$    | -40 to 150   | °C                 |
| Operating Temperature   | $T_J$        | -40 to 125   | °C                 |
| Mounting Force <sup>Ⓞ</sup>                                   |              | 3000 to 3500 | lb.                |
| Mounting Force <sup>Ⓞ</sup>                                   |              | 13.3 to 15.5 | kN                 |

### Electrical and Thermal Characteristics

| Characteristics  | Symbol          | Test Conditions  | C441 | Units              |
|--|-----------------|--|------|--------------------|
| <b>Voltage—Blocking State Maximums</b>   |                 |  |      |                    |
| Forward Leakage, Peak  | $I_{DRM}$       | $T_J = 125^\circ\text{C}, V = V_{DRM}$   | 35   | mA                 |
| Reverse Leakage, Peak  | $I_{RRM}$       | $T_J = 125^\circ\text{C}, V = V_{RRM}$   | 35   | mA                 |
| <b>Current—Conducting State Maximums</b>   |                 |  |      |                    |
| Peak On-State Voltage  | $V_{TM}$        | $I_{TM} = 3000\text{A Peak}, T_C = 25^\circ\text{C}$   | 2.0  | Volts              |
| <b>Switching</b>   |                 |  |      |                    |
| Typical Turn-Off Time  | $t_q$           | $T_J = 125^\circ\text{C}; I_{TM} = 500\text{A}, V_R = 50\text{V Min};$<br>0.8 $V_{DRM}$ Reapplied; $dv/dt = 20\text{V}/\mu\text{sec}$ (linear);<br>Commutation $di/dt = 25\text{A}/\mu\text{sec};$<br>Repetition Rate = 1pps; Gate Bias during Turn-Off<br>Interval = 0V, 100 $\Omega$ | 125  | $\mu\text{sec}$    |
| Typical Delay Time   | $t_d$           | $T_J = 25^\circ\text{C}, I_T = 50\text{Adc},$<br>Gate Supply: 20 Volts,<br>20 $\Omega$ , 0.1 $\mu\text{sec}$ rise time   | .7   | $\mu\text{sec}$    |
| Min. Critical $dv/dt$ exponential to $V_{DRM}$                                       | $dv/dt$         | $T_J = 125^\circ\text{C}$  | 200  | V/ $\mu\text{sec}$ |
| <b>Thermal</b>   |                 |  |      |                    |
| Maximum Thermal Resistance, <sup>Ⓞ</sup><br>double sided cooling<br>Junction to Case | $R_{\theta JC}$ |  | .04  | °C/Watt            |
| Case to Sink, Lubricated   | $R_{\theta CS}$ |  | .02  | °C/Watt            |
| <b>Gate—Maximum Parameters</b>   |                 |  |      |                    |
| Gate Current to Trigger  | $I_{GT}$        | $V_D = 6\text{V}, T_C = 125^\circ\text{C}, R_L = 3\Omega$  | 125  | mA                 |
| Gate Voltage to Trigger  | $V_{GT}$        | $T_J = -40 \text{ to } 125^\circ\text{C}, V_D = 6\text{Vdc}, R_L = 3\Omega$  | 5    | Volts              |
| Non-Triggering Gate Voltage  | $V_{GDM}$       | $T_J = 125^\circ\text{C}, V_D = \text{Rated } V_{DRM},$<br>$R_L = 1000\Omega$  | .15  | Volts              |
| Peak Forward Gate Current  | $I_{GTM}$       |  | 10   | Amperes            |
| Peak Reverse Gate Voltage  | $V_{GRM}$       |  | 5    | Volts              |


<sup>Ⓞ</sup> Consult recommended mounting procedures.




Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272  
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

C441  
 Phase Control SCR  
 750 Amperes Avg/1300-1800 Volts


MAXIMUM ON-STATE CHARACTERISTICS

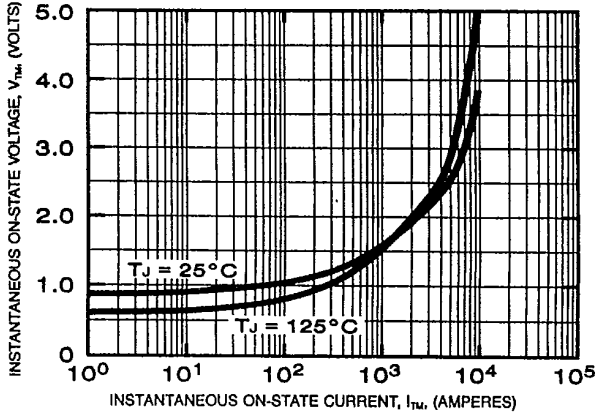


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO CASE)

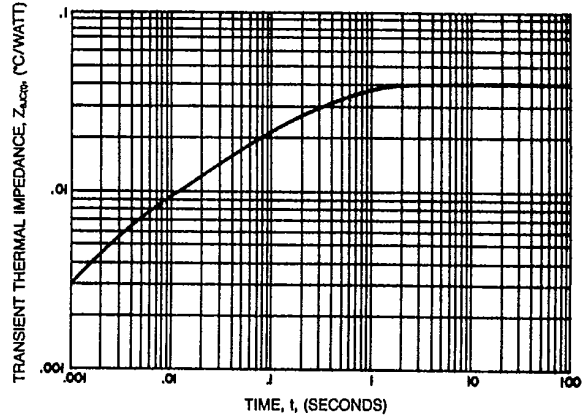


MAXIMUM ALLOWABLE CASE TEMPERATURE (SINUSOIDAL WAVEFORM)

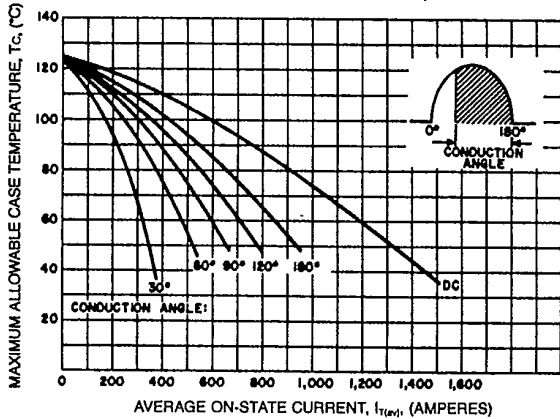


MAXIMUM ON-STATE POWER DISSIPATION (SINUSOIDAL WAVEFORM)

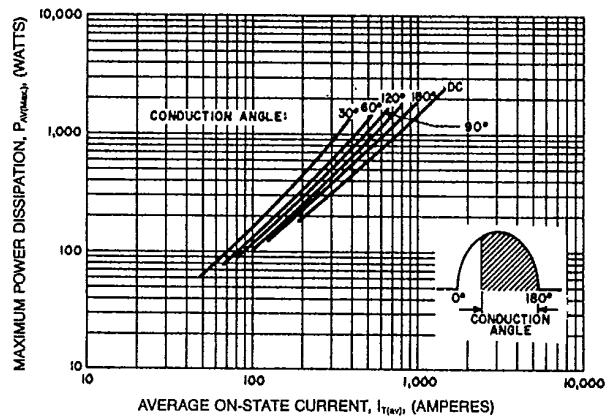

MAXIMUM ALLOWABLE CASE TEMPERATURE (RECTANGULAR WAVEFORM)

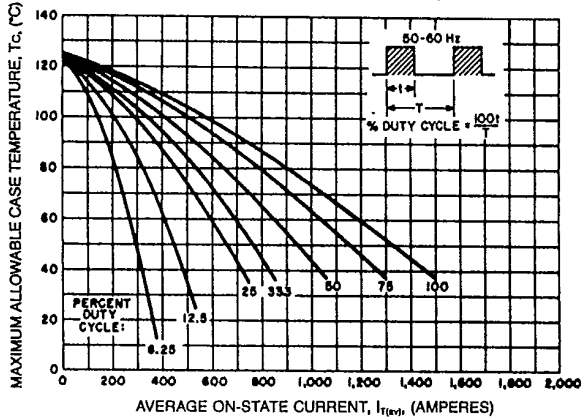

MAXIMUM ON-STATE POWER DISSIPATION (RECTANGULAR WAVEFORM)

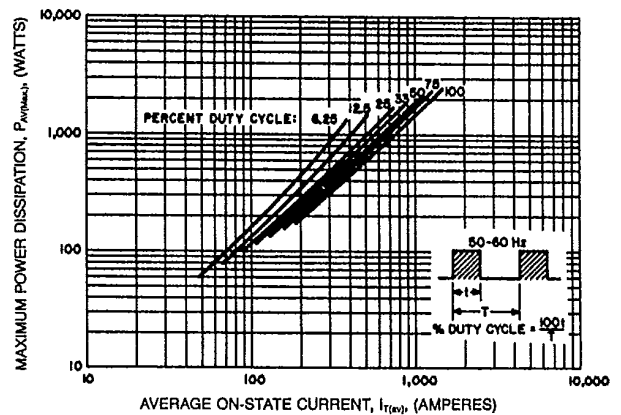



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272


Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

**C441**


**Phase Control SCR**

750 Amperes Avg/1300-1800 Volts


**SUB-CYCLE SURGE AND I<sub>TR</sub> RATINGS  
(RATED LOAD CONDITIONS)**

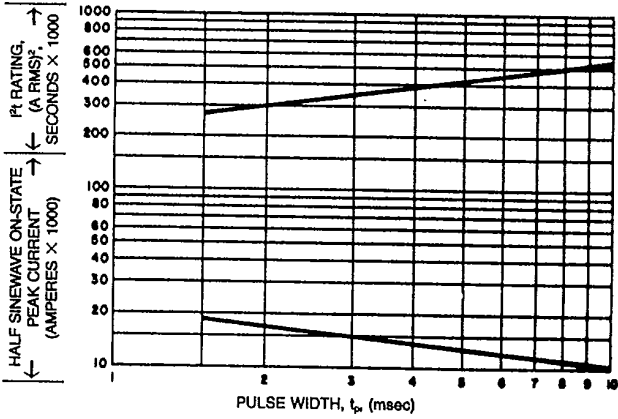

**MAXIMUM ALLOWABLE SURGE ON-STATE CURRENT (NON-REPETITIVE)**

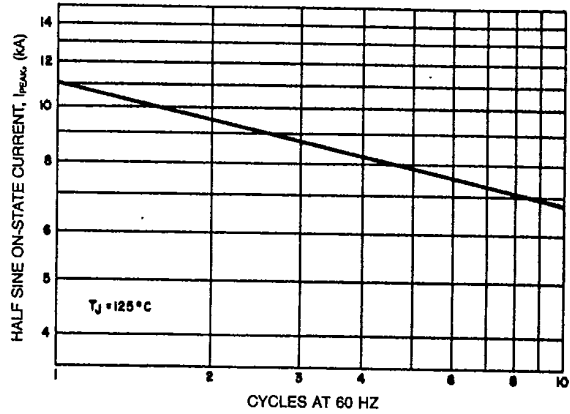

**GATE CHARACTERISTICS**

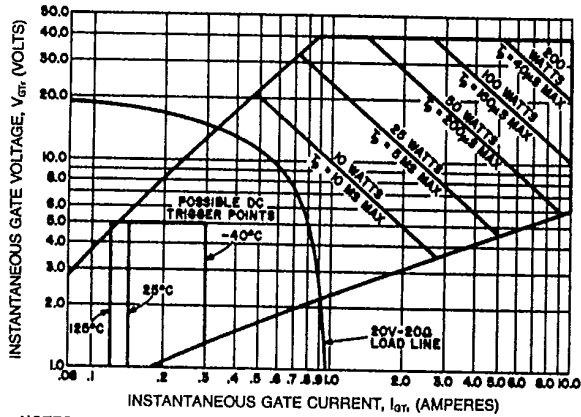

**NOTES:**

1. Maximum allowable average gate dissipation = 5 watts.
2. The locus of possible DC trigger points lies outside the boundaries shown at various case temperatures.
3. T<sub>p</sub> = Rectangular Gate Current Pulse Width.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.