



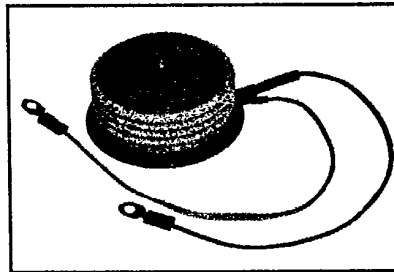

C440

Powerex, Inc. Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

Phase Control SCR
900 Amperes Avg
500-1300 Volts

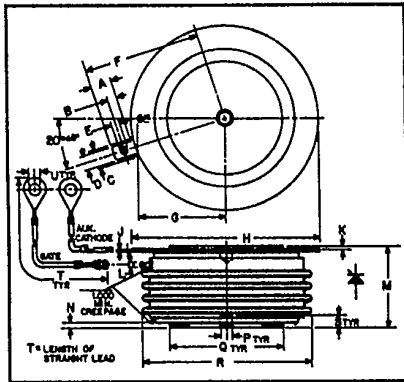

C440
Phase Control SCR
 900 Amperes/500-1200 Volts

C440
Outline Drawing

Dimensions	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	.240	.260	6.096	6.604
B	.110	.130	2.794	3.302
C	.245	—	6.223	—
D	.186	.191	4.724	4.851
E	.060	.075	1.524	1.905
F	—	1.430	—	36.32
G	—	1.065	—	27.051
H	2.200	2.500	55.88	63.50
J	.011	.019	2.794	3.483
K	.030	.130	.762	3.302
L	.056	.060	1.422	1.524
M	1.000	1.065	25.40	27.05
N	.030	.096	.762	2.438
P	.130	.150	3.302	3.810
Q	1.300	1.345	33.02	34.16
R	—	2.150	—	54.61
S	.067	.083	1.702	2.110
T	12.200	12.360	309.9	313.9
U	.137	.153	3.480	3.886

Description

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, Press-Pak (Pow-R-Disc) devices employing the field-proven amplifying (di/namic) gate.

Features:

- Low On-State Voltage
- High di/dt
- High dv/dt
- Hermetic Packaging
- Excellent Surge and I²t Ratings

Applications:

- Power Supplies
- Battery Chargers
- Motor Control
- Light Dimmers
- VAR Generators

Ordering Information

Example: Select the complete five digit part number you desire from the table – i.e. C440M is a 600 Volt, 900 Ampere Phase Control SCR.

Type	Voltage		Current
	V _{ORM} V _{RRM}	Code	
C440	500	E	900
	600	M	
	700	S	
	800	N	
	900	T	
	1000	P	
	1100	PA	
	1200	PB	
	1300	PC	



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

C440

Phase Control SCR

900 Amperes Avg/500-1300 Volts

Absolute Maximum Ratings

	Symbol	C440	Units
RMS On-State Current			
Average On-State Current	$I_{T(RMS)}$	1400	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (60Hz)	$I_{T(av)}$	900	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	I_{TSM}	13,000	Amperes
Critical Rate-of-Rise of On-State Current (Non-Repetitive)	di/dt	12,000	Amperes
Critical Rate-of-Rise of On-State Current (Repetitive)	di/dt	400	Amperes/ μ s
I^2t (for Fusing), One Cycle at 60Hz	I^2t	150	Amperes/ μ s
Peak Gate Power Dissipation		700,000	A^2 sec
Average Gate Power Dissipation	P_{GM}	200	Watts
Storage Temperature	$P_{G(av)}$	5	Watts
Operating Temperature	T_{STG}	-40 to 150	$^{\circ}$ C
Mounting Force [ⓐ]	T_J	-40 to 125	$^{\circ}$ C
Mounting Force [ⓐ]		3000 to 3500	lb.
		13.3 to 15.5	kN

Electrical and Thermal Characteristics







Characteristics	Symbol	Test Conditions	C440	Units
Voltage—Blocking State Maximums[ⓐ]				
Forward Leakage, Peak	I_{DRM}	$T_J = 125^{\circ}$ C, $V = V_{DRM}$	35	mA
Reverse Leakage, Peak	I_{RRM}	$T_J = 125^{\circ}$ C, $V = V_{RRM}$	35	mA
Current—Conducting State Maximums				
Peak On-State Voltage	V_{TM}	$I_{TM} = 3000$ A Peak, $T_J = 25^{\circ}$ C, Duty Cycle $\leq 0.01\%$	1.65	Volts
Switching				
Typical Turn-Off Time	t_q	$T_J = 125^{\circ}$ C; $I_{TM} = 500$ A; $V_R = 50$ V Min; $0.8 V_{DRM}$ Reapplied; $dv/dt = 20$ V/ μ sec (linear); Commutation $di/dt = 25$ A/ μ sec; Repetition Rate = 1pps; Gate Bias during Turn-Off Interval = 0V, 100 Ω	125	μ sec
Typical Delay Time	t_d	$T_J = 25^{\circ}$ C, $I_T = 50$ A, Gate Supply: 20V, 20 Ω , 0.1 μ sec rise time	.7	μ sec
Min. Critical dv/dt exponential to V_{DRM}	dv/dt	$T_J = 125^{\circ}$ C, $V_{DRM} = .8$ Rated, Gate Open	200	V/ μ sec
Thermal				
Maximum Thermal Resistance, [ⓐ] double sided cooling Junction to Case	$R_{\theta JC}$.04	$^{\circ}$ C/Watt
Case to Sink, Lubricated	$R_{\theta CS}$.02	$^{\circ}$ C/Watt
Gate—Maximum Parameters				
Gate Current to Trigger	I_{GT}	$T_J = 25^{\circ}$ C, $V_D = 6$ Vdc, $R_L = 3\Omega$	150	mA
Gate Voltage to Trigger	V_{GT}	$T_J = -40$ to 125° C, $V_D = 6$ Vdc, $R_L = 3\Omega$	5	Volts
Non-Triggerring Gate Voltage	V_{GDM}	$T_J = 125^{\circ}$ C, Rated V_{DRM} , $R_L = 1000\Omega$.15	Volts
Peak Forward Gate Current	I_{GTM}		10	Amperes
Peak Reverse Gate Voltage	V_{GRM}		5	Volts

[ⓐ] Consult recommended mounting procedures.



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15897 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

C440
 Phase Control SCR
 900 Amperes Avg/500-1300 Volts

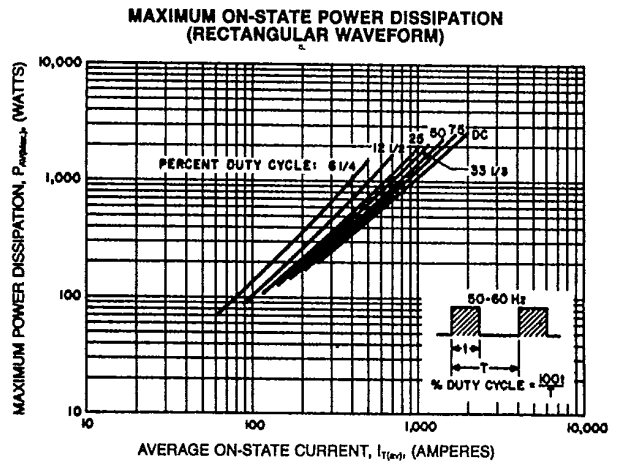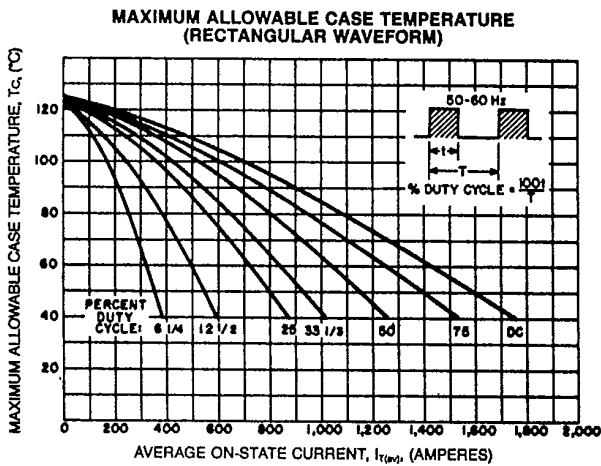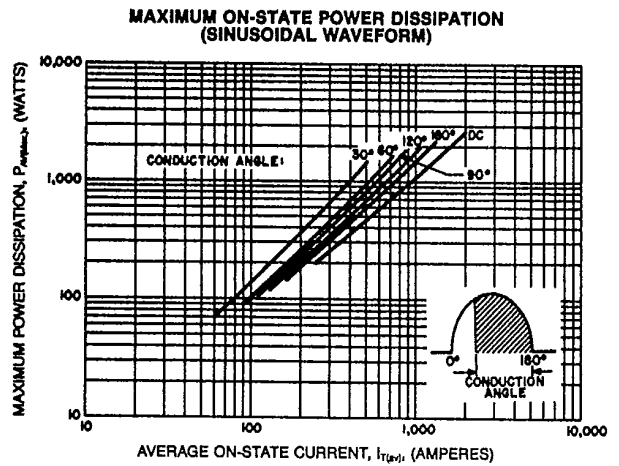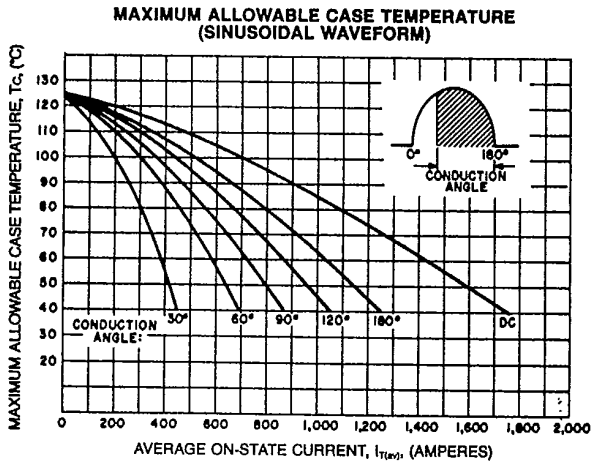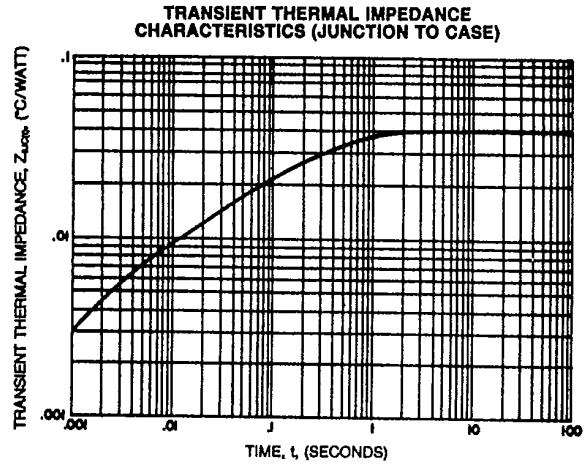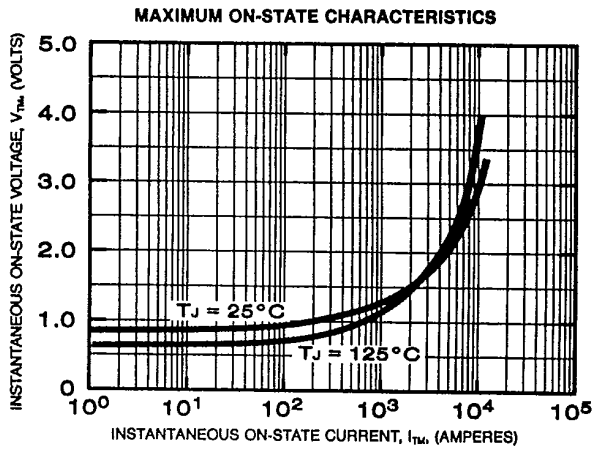





Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

C440
Phase Control SCR
 900 Amperes Avg/500-1300 Volts


SUB-CYCLE SURGE AND I_{TR} RATINGS
 (RATED LOAD CONDITIONS)

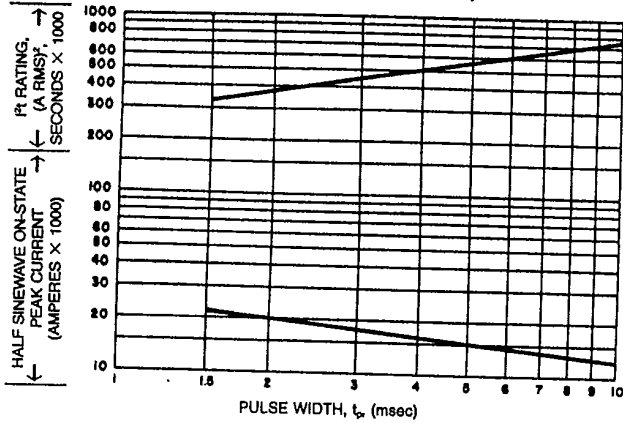

MAXIMUM ALLOWABLE SURGE ON-STATE CURRENT (NON-REPETITIVE)

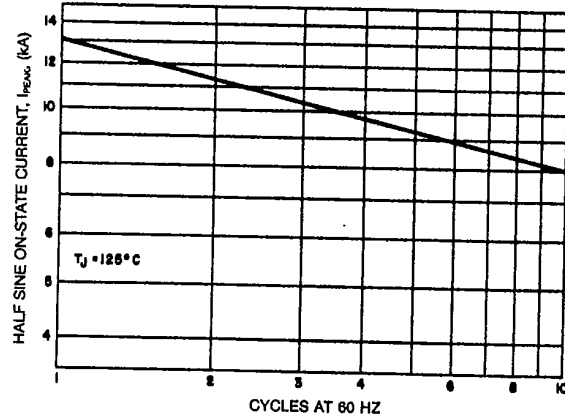

GATE CHARACTERISTICS

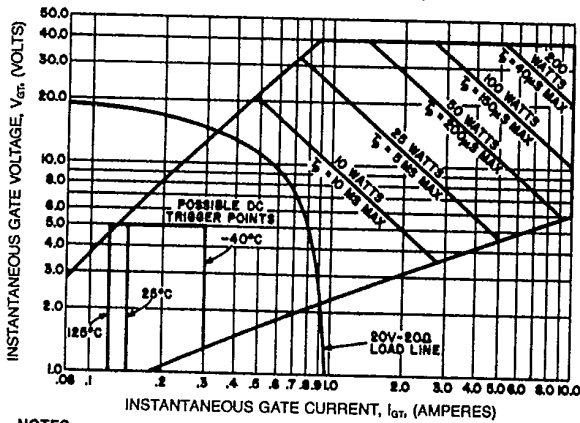

- NOTES:**
1. Maximum allowable average gate dissipation = 5 watts.
 2. The locus of possible DC trigger points lies outside the boundaries shown at various case temperatures.
 3. Tp = Rectangular Gate Current Pulse Width.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.