


# BCR08AS

LOW POWER USE


NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

**BCR08AS**




- **IT (RMS)** ..... **0.8A**
- **VDRM** ..... **600V**
- **IFGT I , IRGT I , IRGT III** ..... **5mA**
- **IFGT III** ..... **10mA**

**OUTLINE DRAWING** Dimensions  
in mm

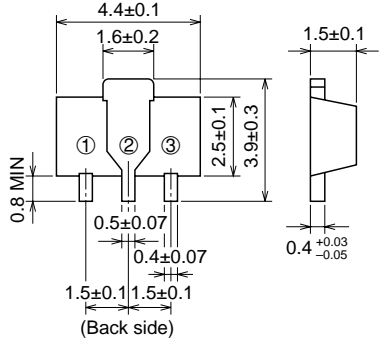

(Back side)



① T1 TERMINAL  
② T2 TERMINAL  
③ GATE TERMINAL

SOT-89

## APPLICATION

Hybrid IC, solid state relay,  
control of household equipment such as electric fan · washing machine,  
other general purpose control applications

## MAXIMUM RATINGS

Symbol	Parameter	Voltage class	
		12 (marked "BF")	
VDRM	Repetitive peak off-state voltage *1	600	V
VDSM	Non-repetitive peak off-state voltage *1	720	V

Symbol	Parameter	Conditions	Ratings	Unit
IT (RMS)	RMS on-state current	Commercial frequency, sine full wave 360° conduction, Ta=40°C *3	0.8	A
ITSM	Surge on-state current	60Hz sinewave 1 full cycle, peak value, non-repetitive	8	A
I <sup>2</sup> t	I <sup>2</sup> t for fusing	Value corresponding to 1 cycle of half wave 60Hz, surge on-state current	0.26	A <sup>2</sup> s
PGM	Peak gate power dissipation		1	W
PG (AV)	Average gate power dissipation		0.1	W
VGM	Peak gate voltage		6	V
IGM	Peak gate current		1	A
Tj	Junction temperature		-40 ~ +125	°C
Tstg	Storage temperature		-40 ~ +125	°C
—	Weight	Typical value	48	mg

\*1. Gate open.

# BCR08AS

LOW POWER USE

NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

## ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit	
			Min.	Typ.	Max.		
IDRM	Repetitive peak off-state current	$T_j=125^\circ\text{C}$ , $V_{\text{DRM}}$ applied	—	—	1.0	mA	
V <sub>TM</sub>	On-state voltage	$T_c=25^\circ\text{C}$ , $I_{\text{TM}}=1.2\text{A}$ , Instantaneous measurement	—	—	2.0	V	
V <sub>FGT I</sub>	Gate trigger voltage *2	$T_j=25^\circ\text{C}$ , $V_D=6\text{V}$ , $R_L=6\Omega$ , $R_G=330\Omega$	I	—	—	2.0	V
V <sub>RGT I</sub>			II	—	—	2.0	V
V <sub>RGT III</sub>			III	—	—	2.0	V
V <sub>FGT III</sub>			IV	—	—	2.0	V
I <sub>FGT I</sub>	Gate trigger current *2	$T_j=25^\circ\text{C}$ , $V_D=6\text{V}$ , $R_L=6\Omega$ , $R_G=330\Omega$	I	—	—	5	mA
I <sub>RGT I</sub>			II	—	—	5	mA
I <sub>RGT III</sub>			III	—	—	5	mA
I <sub>FGT III</sub>			IV	—	—	10	mA
V <sub>GD</sub>	Gate non-trigger voltage	$T_j=125^\circ\text{C}$ , $V_D=1/2V_{\text{DRM}}$	0.1	—	—	V	
R <sub>th(j-a)</sub>	Thermal resistance	Junction to case *3	—	—	65	$^\circ\text{C}/\text{W}$	
(dv/dt) <sub>c</sub>	Critical-rate of rise of off-state commutating voltage *4	$T_j=125^\circ\text{C}$	0.5	—	—	V/ $\mu\text{s}$	

\*2. Measurement using the gate trigger characteristics measurement circuit.


\*3. Mounted on 25mm × 25mm × 0.7mm ceramic plate with solder.

\*4. Test conditions of the critical-rate of rise of off-state commutating voltage is shown in the table below.


Test conditions	Commutating voltage and current waveforms (inductive load)
1. Junction temperature $T_j=125^\circ\text{C}$ 2. Rate of decay of on-state commutating current $(di/dt)_c=-0.4\text{A/ms}$ 3. Peak off-state voltage $V_D=400\text{V}$	

## PERFORMANCE CURVES

MAXIMUM ON-STATE CHARACTERISTICS

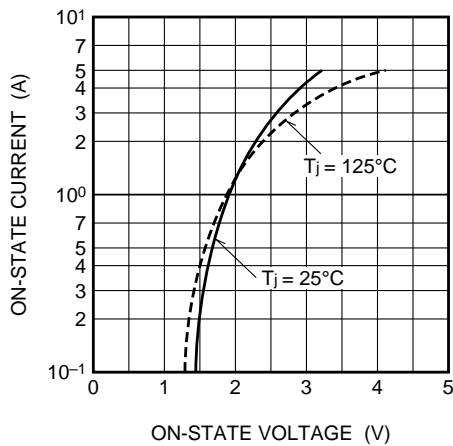







RATED SURGE ON-STATE CURRENT

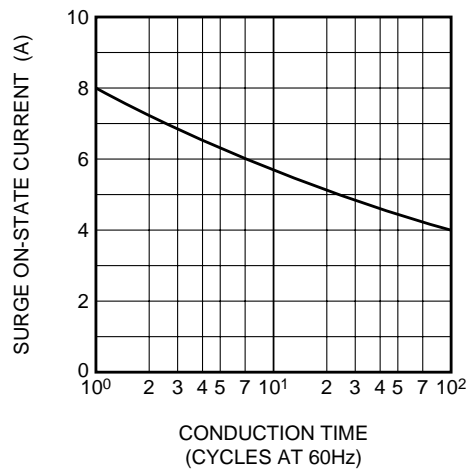

# BCR08AS

LOW POWER USE







NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

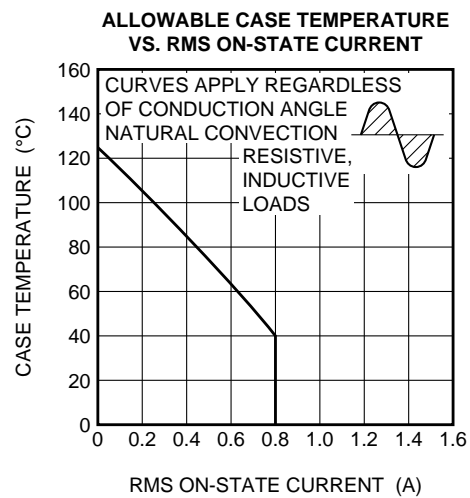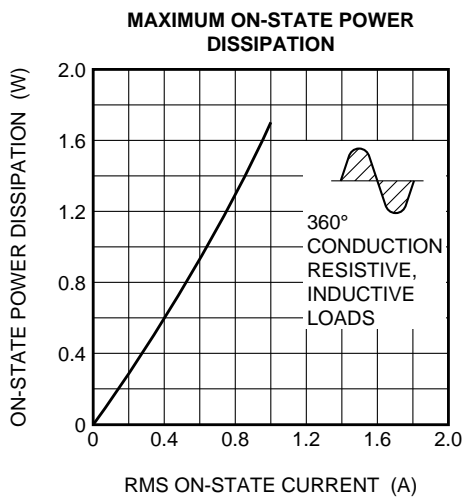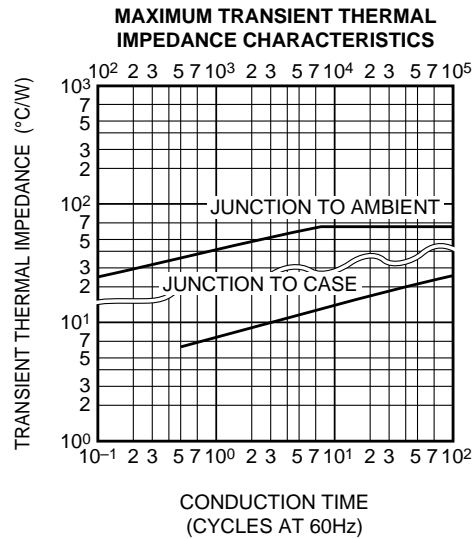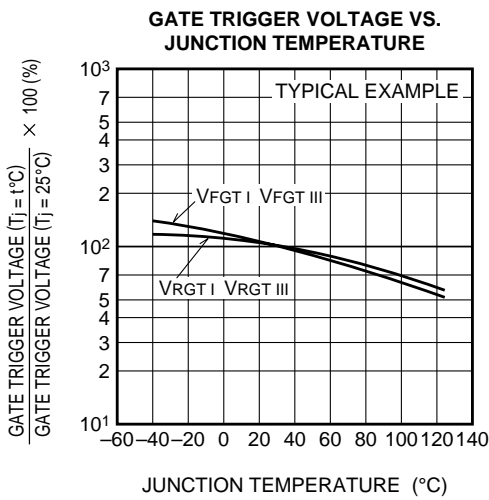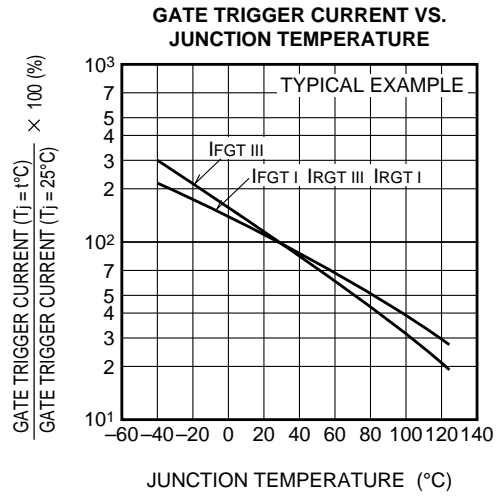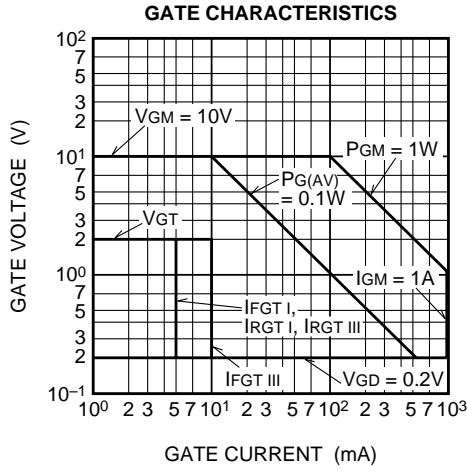

# BCR08AS

LOW POWER USE


NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

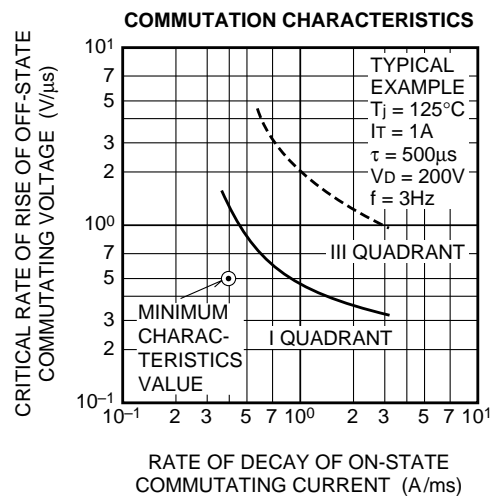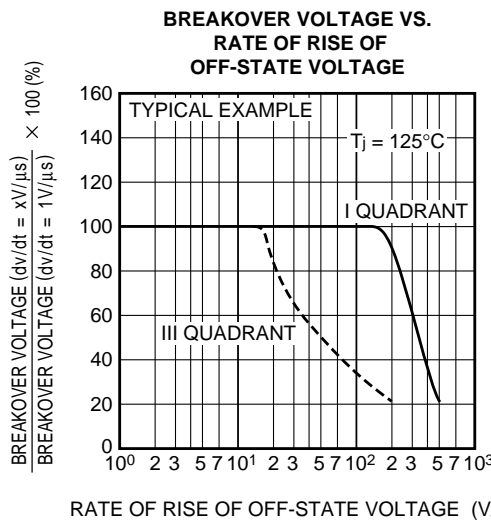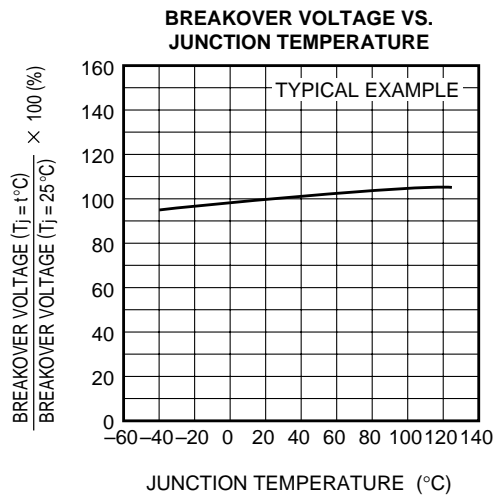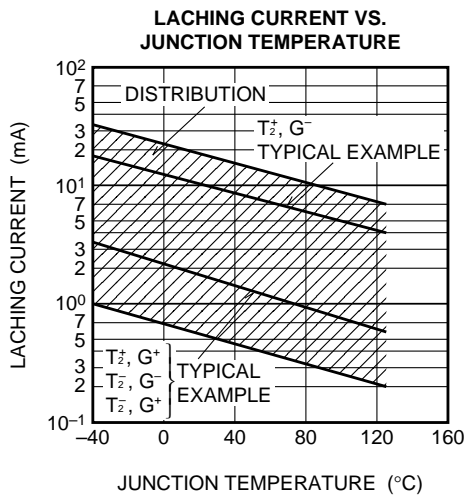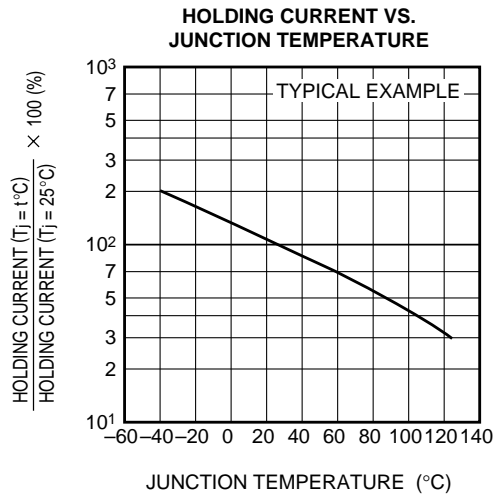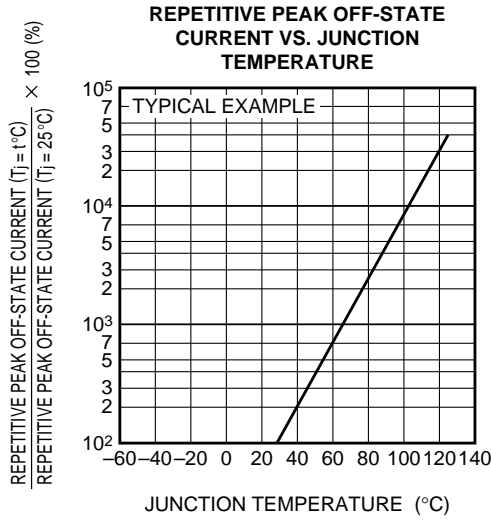


# BCR08AS

LOW POWER USE

NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

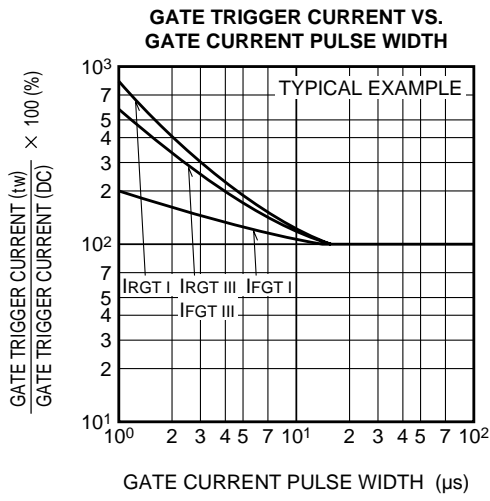

**GATE TRIGGER CHARACTERISTICS TEST CIRCUITS**

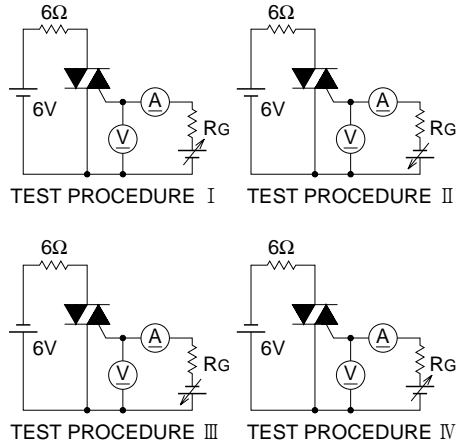



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.