


Features


- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards



RS-5		
Dim	Min	Max
A	39.40	40.10
B	20.20	21.00
C	21.00	21.70
D	25.40	—
E	0.97 Ø	1.07 Ø
G	6.20	6.70
H	9.80	10.20
J	7.20	7.60
K	4.60	5.00
All Dimensions in mm		

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 25.3 grams (approx.)
- Mounting Position: Any
- Marking: Type Number



Maximum Ratings and Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	B40C3700/ 2200	B80C3700/ 2200	B125C3700/ 2200	B250C3700/ 2200	B380C3700/ 2200	Unit	
Peak Repetitive Reverse Voltage	V_{RRM}						V	
Working Peak Reverse Voltage	V_{RWM}	100	200	300	600	900	V	
DC Blocking Voltage	V_R						V	
Recommend Input Voltage	V_{RMS}	40	80	125	250	380	V	
Average Rectified Output Current @ $T_A = 45^\circ\text{C}$ (Note 1)	I_O	3.7						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100						A
Repetitive Peak Forward Surge Current	I_{FRM}	15						A
Forward Voltage (per element) @ $I_F = 3.0\text{A}$	V_{FM}	1.0						V
Peak Reverse Current @ $T_C = 25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_C = 150^\circ\text{C}$	I_R	10 6.0						μA mA
Rating for Fusing ($t < 8.3\text{ms}$) (Note 2)	I_t^2	50						A^2s
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	3.0						K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-55 to +150						$^\circ\text{C}$

***Glass Passivated forms are available upon request.**

Note: 1. Measured at 3"sq. x 0.11" thick AL. plate.
2. Non-repetitive for $t > 1\text{ms}$ and $< 8.3\text{ms}$.

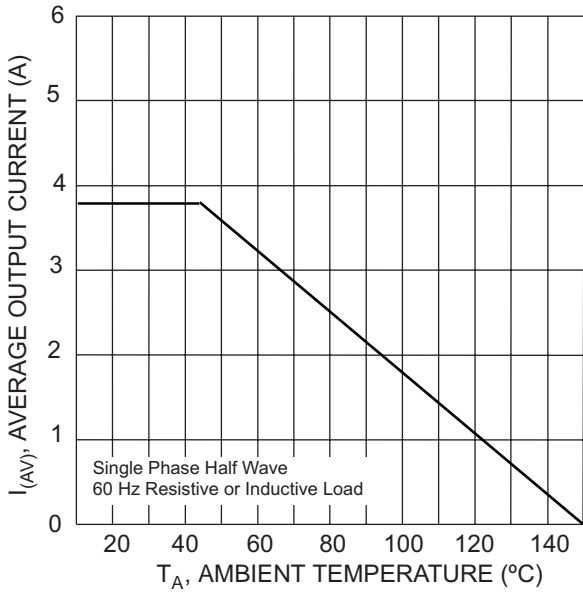


Fig. 1 Forward Current Derating Curve

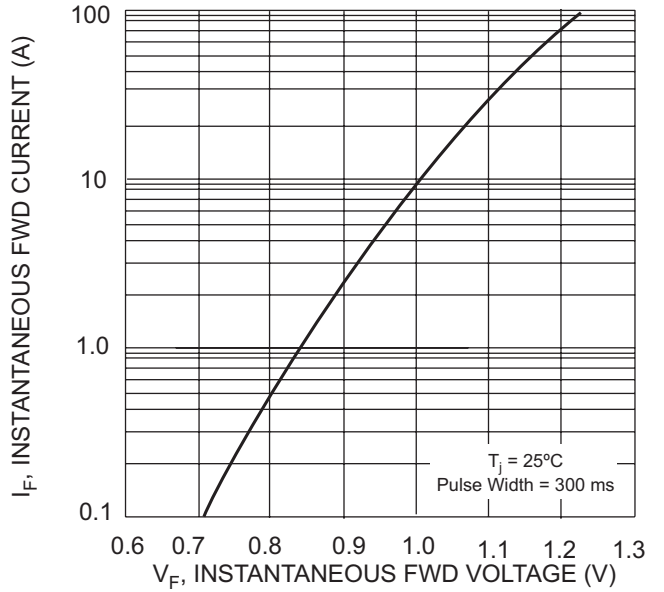


Fig. 2 Typical Forward Characteristics, per element

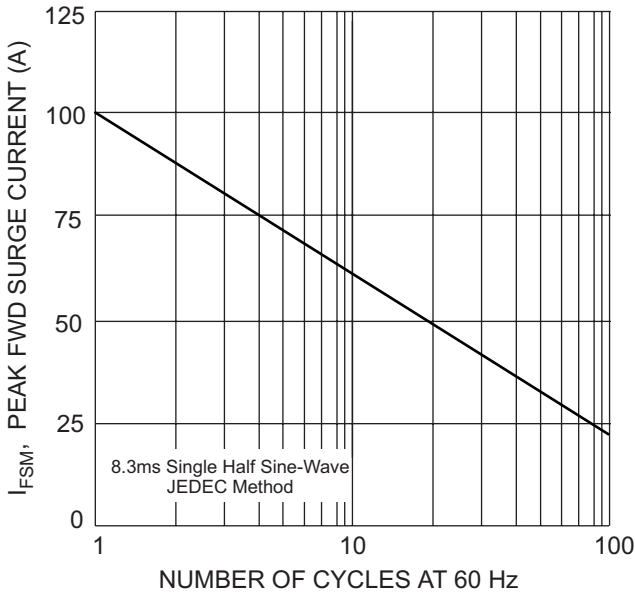


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

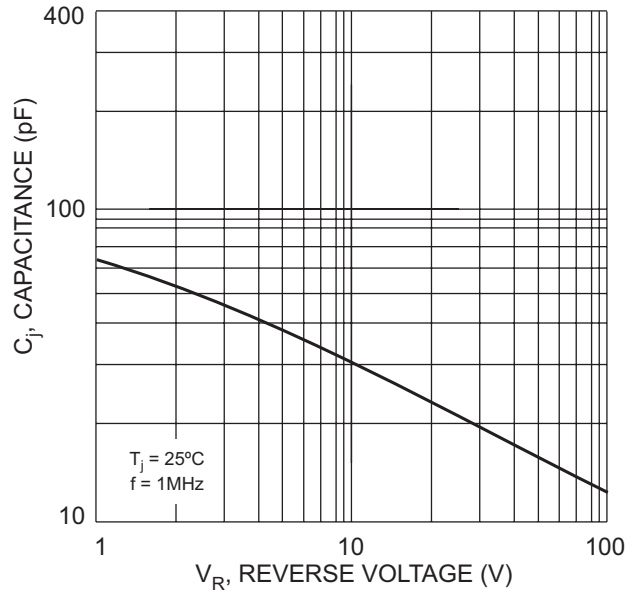


Fig. 4 Typical Junction Capacitance Per Element

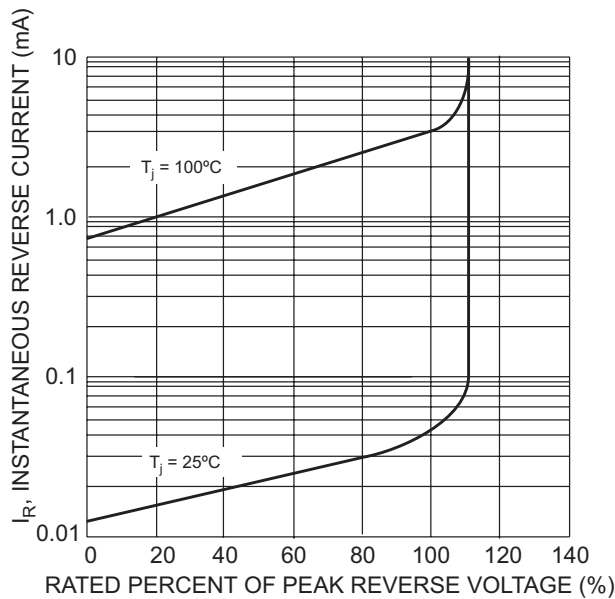


Fig. 5 Typical Reverse Characteristics

ORDERING INFORMATION

Product No.	Package Type	Shipping Quantity
B40C3700/2200	SIL Bridge	200 Units/Box
B80C3700/2200	SIL Bridge	200 Units/Box
B125C3700/2200	SIL Bridge	200 Units/Box
B250C3700/2200	SIL Bridge	200 Units/Box
B380C3700/2200	SIL Bridge	200 Units/Box

Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

WARNING: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd.

No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan

Phone: 886-7-822-5408 or 886-7-822-5410

Fax: 886-7-822-5417

Email: sales@wontop.com

Internet: <http://www.wontop.com>

We power your everyday.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.