

### 5 A MOLD TRIAC

#### DESCRIPTION

The AC05DJM and AC05DJM-Z are all diffused mold type triac granted RMS On-state current 5 Amps, with rated voltages up to 400, 600 volts.

#### FEATURES

- Small and Surface Mount Package
- 50 A Surge current
- Mold package

#### APPLICATIONS

- Motor speed control
- Lamp dimmer, Temperature controllers
- Various solid state switches, etc.

#### ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ )

CHARACTERISTICS	SYMBOL	AC05DJM AC05DJM-Z	AC05FJM AC05FJM-Z	UNIT	NOTE
Repetitive Peak Off Voltage	$V_{DRM}$	400	600	V	
Non-repetitive Peak Off Voltage	$V_{DSM}$	500	700	V	
RMS On-State Current	$I_T(\text{RMS})$	5 ( $T_c = 104^\circ\text{C}$ )		A	See Fig. 11
Peak Surge On-State Current	$I_{TSM}$	50 (50 Hz, Non-repetitive)		A	See Fig. 2
Fusing Current	$\int i^2 dt$	10 ( $1\text{ ms} \leq t \leq 10\text{ ms}$ )		$\text{A}^2\text{s}$	
Peak Gate Power Dissipation	$P_{GM}$	3 ( $f \geq 50\text{ Hz}$ , Duty $\leq 10\%$ )		W	
Average Gate Power Dissipation	$P_{G(AV)}$	0.3		W	
Peak Gate Current	$I_{FGM}$	$\pm 1.5$ ( $f \geq 50\text{ Hz}$ , Duty $\leq 10\%$ )		A	
Junction Temperature	$T_j$	-40 to +125		$^\circ\text{C}$	
Storage Temperature	$T_{stg}$	-40 to +150		$^\circ\text{C}$	


ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT	NOTE	
Peak Off-State Current		I <sub>DRM</sub>	V <sub>DM</sub> = V <sub>DRM</sub>	—	—	100	μA		
Peak Off-State Current		I <sub>DRM</sub>	T <sub>j</sub> = 125 °C, V <sub>DM</sub> = V <sub>DRM</sub>	—	—	1	mA		
On-State Voltage		V <sub>TM</sub>	I <sub>TM</sub> = 5 A	—	—	1.8	V	See Fig. 1	
Gate-trigger Current	Trigger Mode I	I <sub>GT</sub>	V <sub>DM</sub> = 12 V, R <sub>L</sub> = 30 Ω	T <sub>2+</sub> , G+	—	—	10	mA	See Fig. 4
	II			T <sub>2-</sub> , G+	—	—	—		
	III			T <sub>2-</sub> , G-	—	—	10		
	IV			T <sub>2+</sub> , G-	—	—	10		
Gate-trigger Voltage	Trigger Mode I	V <sub>GT</sub>	V <sub>DM</sub> = 12 V, R <sub>L</sub> = 30 Ω	T <sub>2+</sub> , G+	—	—	1.5	V	See Fig. 4
	II			T <sub>2-</sub> , G+	—	—	—		
	III			T <sub>2-</sub> , G-	—	—	1.5		
	IV			T <sub>2+</sub> , G-	—	—	1.5		
Gate Non-Trigger Voltage		V <sub>GD</sub>	T <sub>j</sub> = 125 °C, V <sub>DM</sub> = $\frac{1}{2}$ V <sub>DRM</sub>	0.2	—	—	V		
Holding Current		I <sub>H</sub>	V <sub>D</sub> = 24 V, I <sub>TM</sub> = 5 A	—	10	—	mA		
Critical Rate-of Rise of Off-State Voltage		dV/dt	T <sub>j</sub> = 125 °C, V <sub>DM</sub> = $\frac{2}{3}$ V <sub>DRM</sub>	—	100	—	V/μs		
Commutating dV/dt		(dV/dt) <sub>C</sub>	T <sub>j</sub> = 125 °C (di <sub>T</sub> /dt) <sub>C</sub> = -2.7 A/ms V <sub>DM</sub> = 400 V	5	—	—	V/μs		
Thermal Resistance		R <sub>th(j-c)</sub>	Junction to Case	—	—	3.0	°C/W	See Fig. 13	
Thermal Resistance		R <sub>th(j-a)</sub>	Junction to Ambient*	—	—	62.5	°C/W	AC05DJM-Z AC05FJM-Z	

\* Mounted on ceramic substrate of 7.5 cm<sup>2</sup> × 0.7 mm.

PACKAGE DIMENSIONS

(Unit : mm)

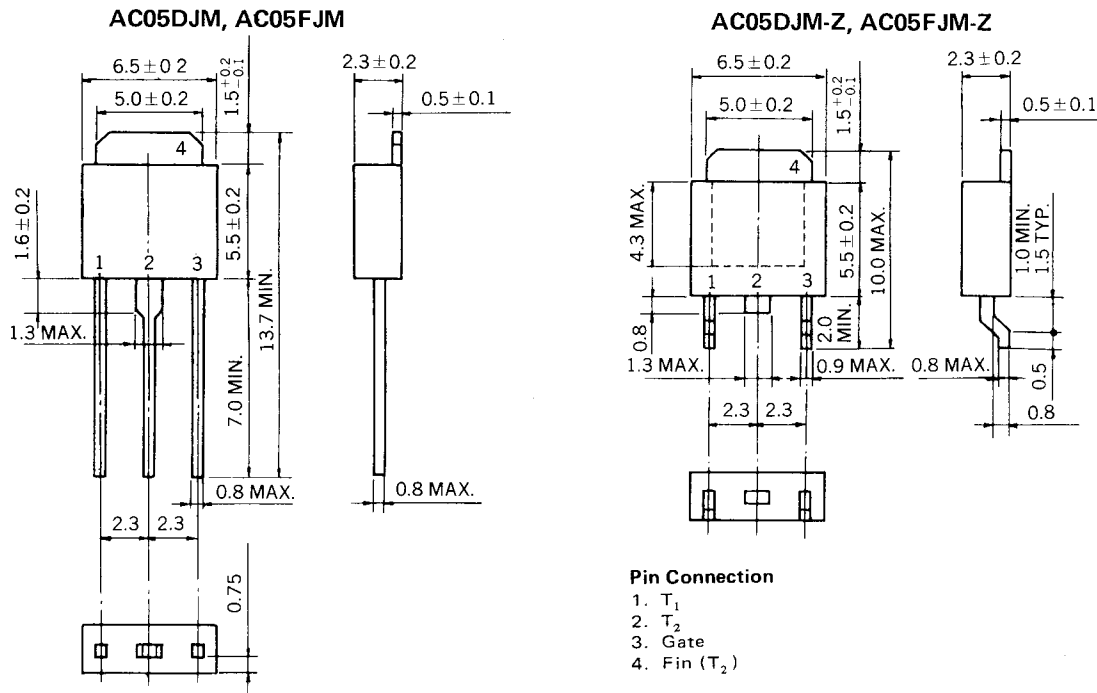

CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ )

Fig. 1  $i_T - v_T$  CHARACTERISTIC

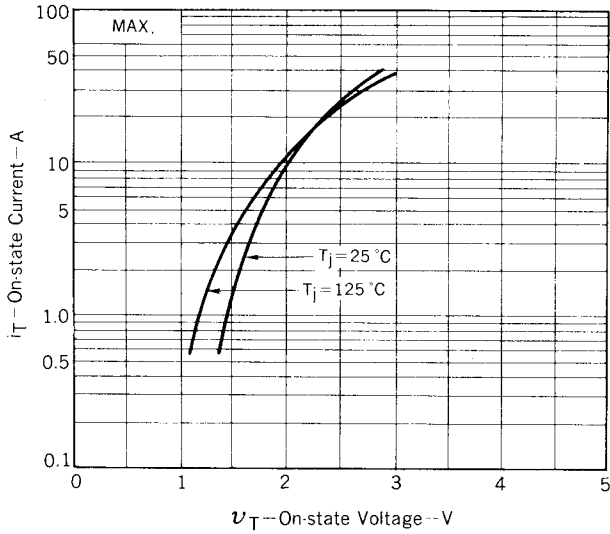


Fig. 2  $I_{TSM}$  RATING

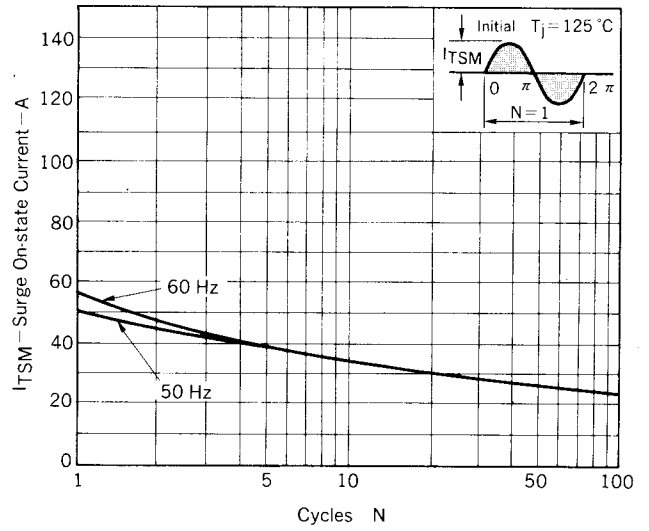


Fig. 3  $V_G - I_G$  RATING

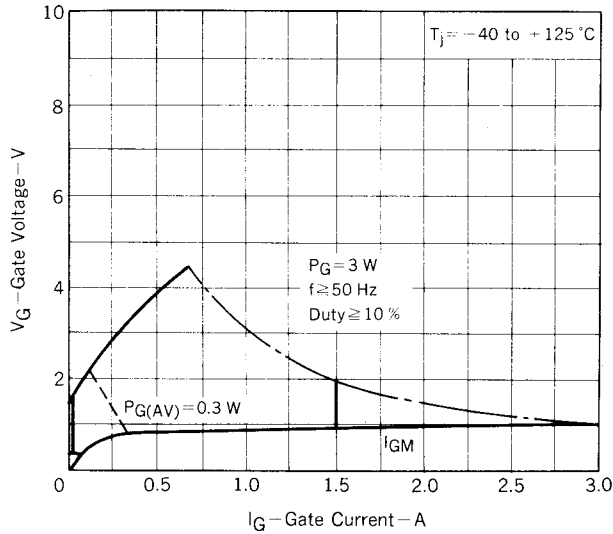


Fig. 4  $V_{GT} - I_{GT}$  TYPICAL CHARACTERISTIC

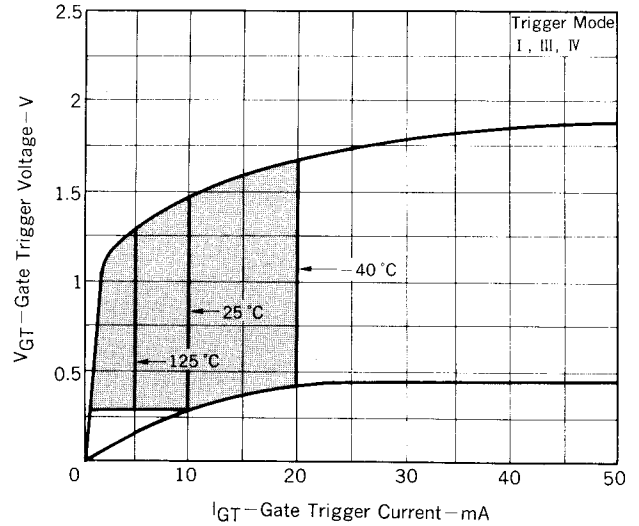


Fig. 5  $I_{GT} - T_A$  TYPICAL DISTRIBUTION

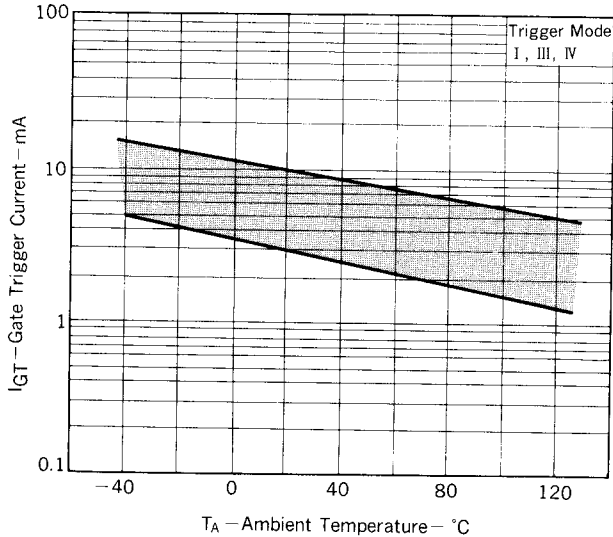


Fig. 6  $V_{GT} - T_A$  TYPICAL DISTRIBUTION

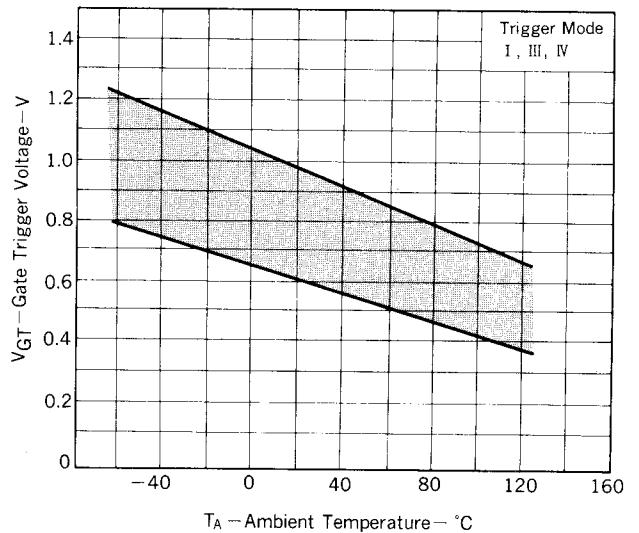


Fig. 7  $i_{GT} - \tau$  TYPICAL DISTRIBUTION

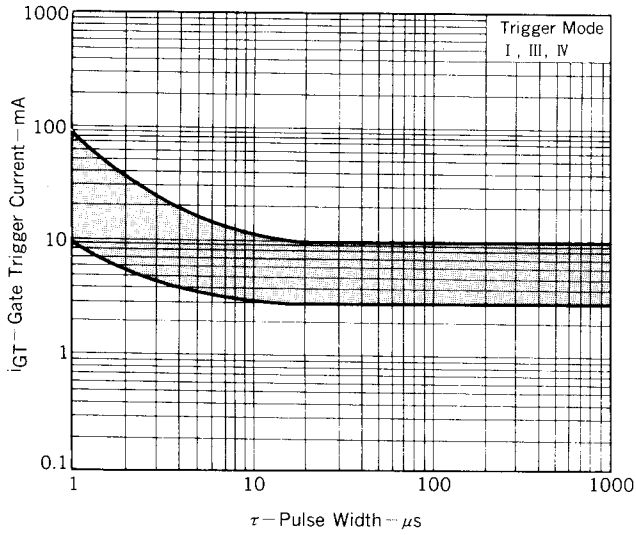


Fig. 8  $v_{GT} - \tau$  TYPICAL DISTRIBUTION

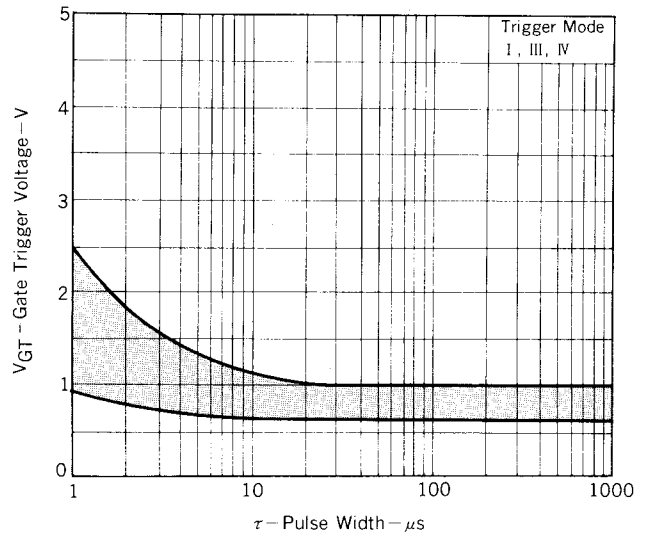


Fig. 9  $I_H - T_A$  TYPICAL DISTRIBUTION

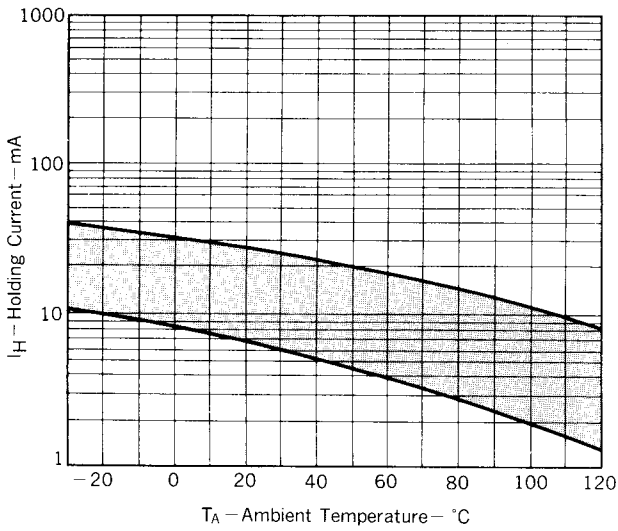


Fig. 10  $P_{T(AV)} - I_{T(RMS)}$  CHARACTERISTIC

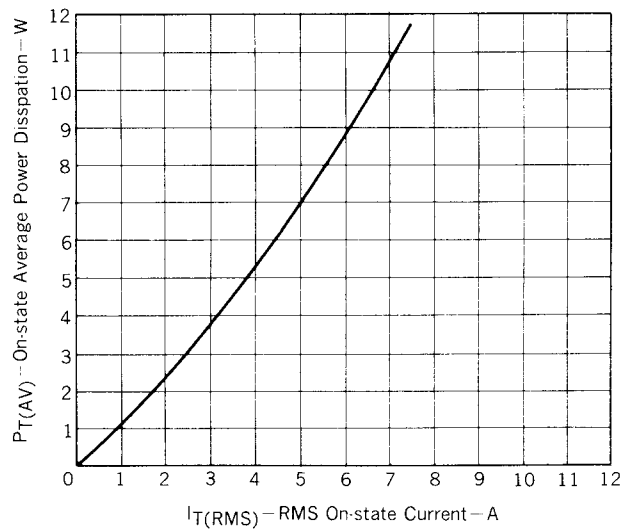


Fig. 11  $T_C - I_{T(RMS)}$  RATING

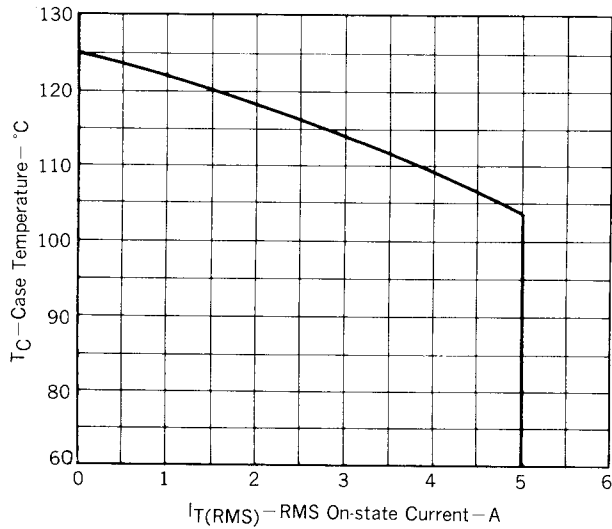


Fig. 12  $T_A - I_{T(RMS)}$  RATING


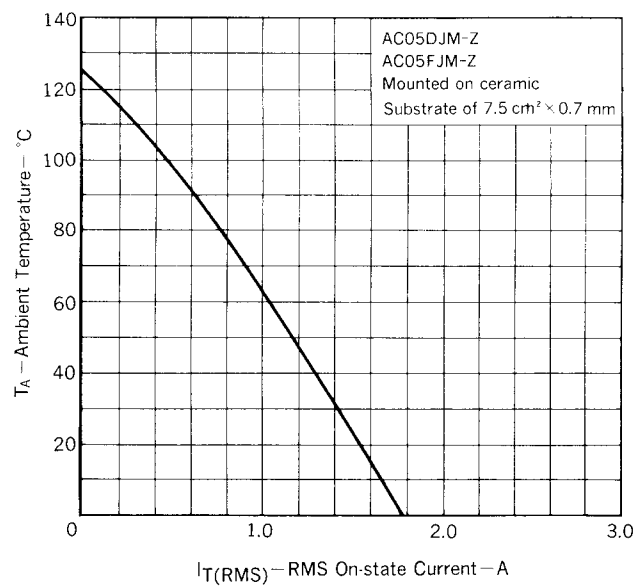


Fig. 13  $Z_{th}$  CHARACTERISTIC

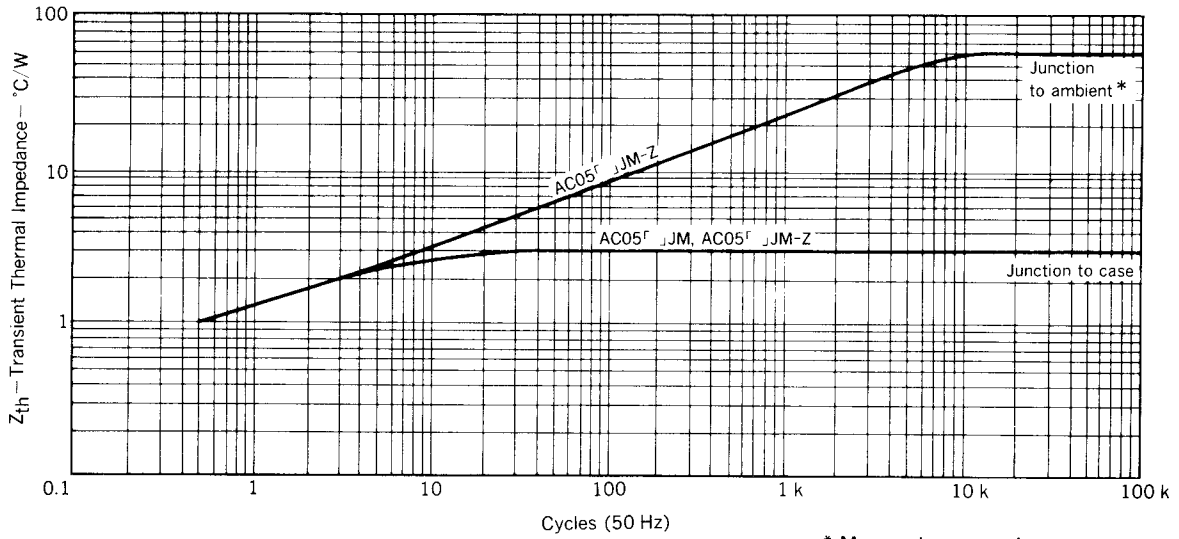

\* Mounted on ceramic substrate of 7.5 cm<sup>2</sup> x 0.7 mm

REFERENCE

APPLICATION NOTE NAME	No.
GUIDE TO QUALITY ASSURANCE FOR SEMICONDUCTOR DEVICES	MEI-1202
SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL	C10535E

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.