

# DATA SHEET

## **74F597**

8-bit shift register with input storage registers

Product specification

1991 Sep 13

IC15 Data Handbook

## 8-bit shift register with input storage registers

74F597

## FEATURES


- High impedance PNP base inputs for reduced loading (20 $\mu$ A in High and Low states)
- 8-bit parallel storage register
- 3-State output buffers
- Shift register has asynchronous direct overriding reset
- Shift load  $\overline{\text{SHLD}}$  is functional when SHCP is Low and locked out when SHCP is High
- Guaranteed shift frequency DC to 105MHz

## DESCRIPTION

The 74F597 consists of an 8-bit storage register feeding a parallel-in/serial-in, serial-out 8-bit shift register. The storage register and shift register have separate positive edge triggered clocks. The shift register has asynchronous reset and when SHCP is Low, it has asynchronous load.

The shift register load function has been modified to load when both  $\overline{\text{SHLD}}$  and SHCP are Low. When SHCP is High the shift register load operation is not performed. Data will be properly shifted on the rising edge of SHCP when  $\overline{\text{SHLD}}$  is High.

## PIN CONFIGURATION

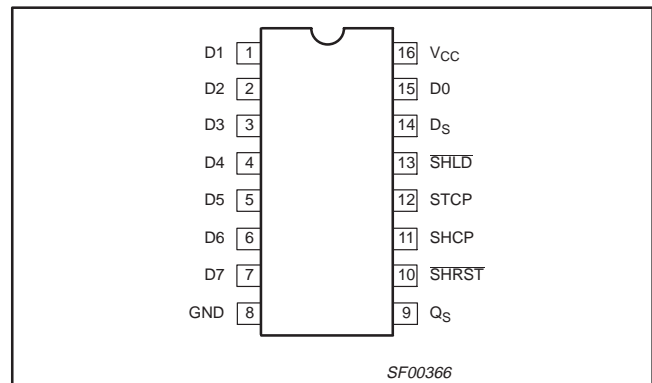

| TYPE   | TYPICAL $f_{\text{MAX}}$ | TYPICAL SUPPLY CURRENT (TOTAL) |
|--------|--------------------------|--------------------------------|
| 74F597 | 135MHz                   | 42mA                           |

## ORDERING INFORMATION

| DESCRIPTION        | COMMERCIAL RANGE<br>$V_{\text{CC}} = 5V \pm 10\%$ ,<br>$T_{\text{amb}} = 0^{\circ}\text{C to } +70^{\circ}\text{C}$ | PKG DWG # |
|--------------------|---|-----------|
| 16-pin plastic DIP | N74F597N  | SOT38-4   |
| 16-pin plastic SO  | N74F597D  | SOT109-1  |

## INPUT AND OUTPUT LOADING AND FAN-OUT TABLE

| PINS                     | DESCRIPTION                             | 74F (U.L.) HIGH/LOW | LOAD VALUE HIGH/LOW   |
|--------------------------|---|---------------------|-----------------------|
| Ds                       | Serial data input                       | 1.0/0.033           | 20 $\mu$ A/20 $\mu$ A |
| D0–D7                    | Parallel data inputs                    | 1.0/0.033           | 20 $\mu$ A/20 $\mu$ A |
| SHCP                     | Shift register clock pulse input        | 1.0/0.033           | 20 $\mu$ A/20 $\mu$ A |
| STCP                     | Storage register clock pulse input      | 1.0/0.033           | 20 $\mu$ A/20 $\mu$ A |
| $\overline{\text{SHLD}}$ | Shift register load input (active Low)  | 1.0/0.033           | 20 $\mu$ A/20 $\mu$ A |
| SHRST                    | Shift register reset input (active Low) | 1.0/0.033           | 20 $\mu$ A/20 $\mu$ A |
| Qs                       | Serial data output                      | 50/33               | 1.0mA/20mA            |


## NOTE:

One (1.0) FAST unit load is defined as: 20 $\mu$ A in the High state and 0.6mA in the Low state.


# 8-bit shift register with input storage registers

74F597

## LOGIC SYMBOL

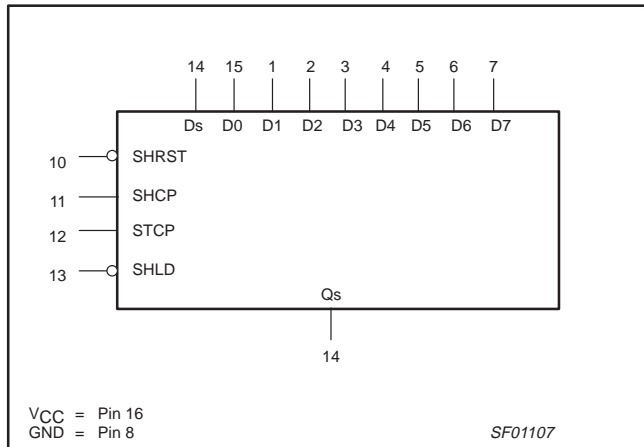

## IEC/IEEE SYMBOL (IEEE/IEC)

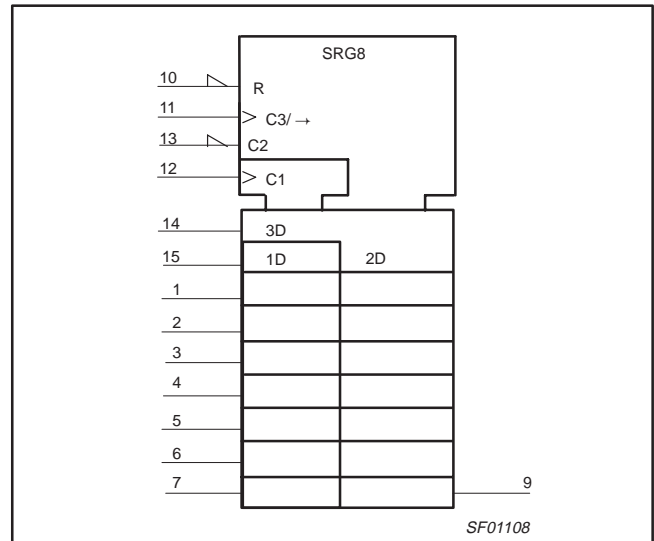

## FUNCTION TABLE


| INPUTS |      |      |       | OPERATING MODES   |
|--------|------|------|-------|---|
| STCP   | SHCP | SHLD | SHRST |   |
| ↑      | X    | X    | X     | Data loaded to storage registers  |
| ↑      | L    | L    | H     | Data loaded from inputs to shift register                                 |
| ↑      | L    | L    | H     | Data transferred from storage registers to shift registers                |
| X      | L    | L    | L     | Invalid logic, state of shift register indeterminate when signals removed |
| X      | X    | H    | L     | Shift register cleared  |
| X      | ↑    | H    | H     | Shift register clocked, $Q_n=Q_{n-1}$ , $Q_0=D_s$                         |
| ↑      | H    | X    | H     | Hold  |

- H = High voltage level
- L = Low voltage level
- X = Don't care
- ↑ = Low-to-High clock transition
- ↑ = Not a Low-to-High clock transition

# 8-bit shift register with input storage registers

74F597

## LOGIC DIAGRAM

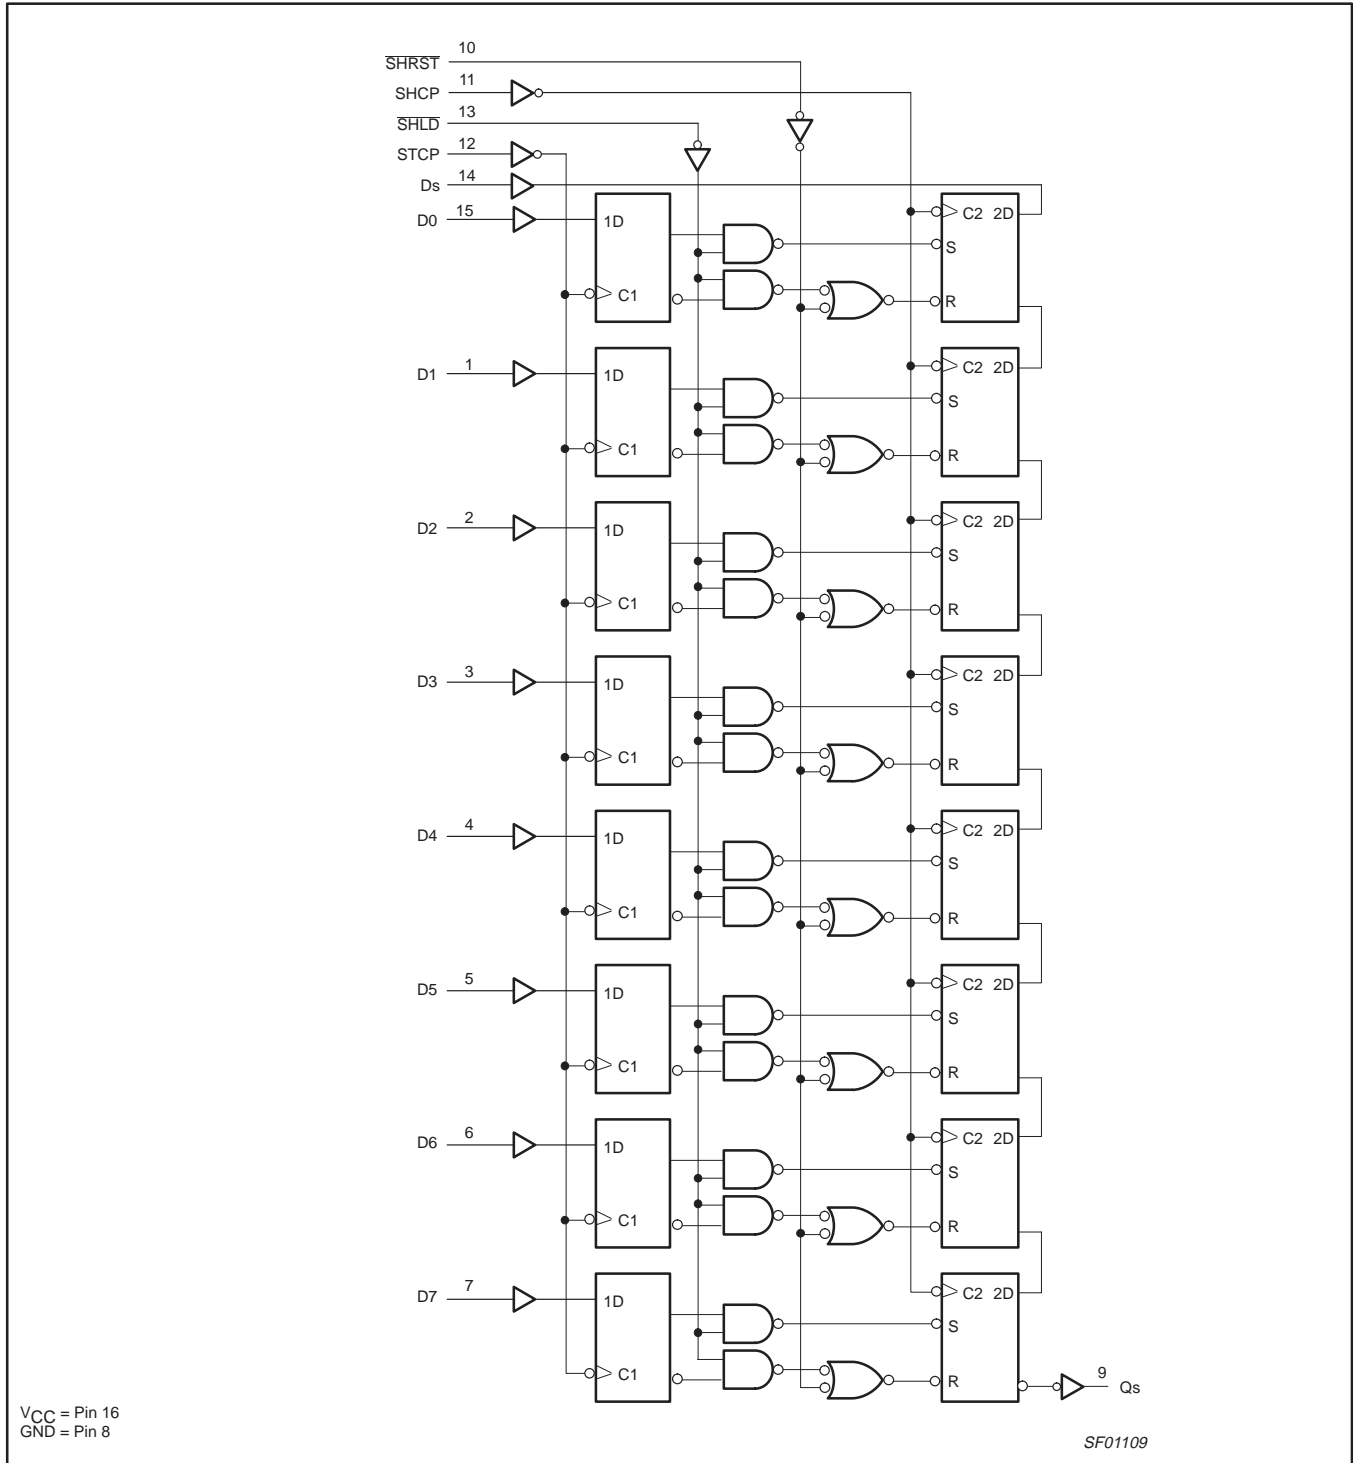

## 8-bit shift register with input storage registers

74F597

**ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limits set forth in this table may impair the useful life of the device.  
Unless otherwise noted these limits are over the operating free-air temperature range.)

| SYMBOL           | PARAMETER                                      | RATING                   | UNIT |
|------------------|--|--------------------------|------|
| V <sub>CC</sub>  | Supply voltage                                 | -0.5 to +7.0             | V    |
| V <sub>IN</sub>  | Input voltage                                  | -0.5 to +7.0             | V    |
| I <sub>IN</sub>  | Input current                                  | -30 to +5                | mA   |
| V <sub>OUT</sub> | Voltage applied to output in High output state | -0.5 to +V <sub>CC</sub> | V    |
| I <sub>OUT</sub> | Current applied to output in Low output state  | 40                       | mA   |
| T <sub>amb</sub> | Operating free-air temperature range           | 0 to +70                 | °C   |
| T <sub>stg</sub> | Storage temperature range                      | -65 to +150              | °C   |

**RECOMMENDED OPERATING CONDITIONS**

| SYMBOL           | PARAMETER                            | LIMITS |     |     | UNIT |
|------------------|--------------------------------------|--------|-----|-----|------|
|                  |                                      | MIN    | NOM | MAX |      |
| V <sub>CC</sub>  | Supply voltage                       | 4.5    | 5.0 | 5.5 | V    |
| V <sub>IH</sub>  | High-level input voltage             | 2.0    |     |     | V    |
| V <sub>IL</sub>  | Low-level input voltage              |        |     | 0.8 | V    |
| I <sub>IK</sub>  | Input clamp current                  |        |     | -18 | mA   |
| I <sub>OH</sub>  | High-level output current            |        |     | -1  | mA   |
| I <sub>OL</sub>  | Low-level output current             |        |     | 20  | mA   |
| T <sub>amb</sub> | Operating free-air temperature range | 0      |     | +70 | °C   |

**DC ELECTRICAL CHARACTERISTICS**

(Over recommended operating free-air temperature range unless otherwise noted.)

| SYMBOL          | PARAMETER                                      | TEST CONDITIONS <sup>NO TAG</sup>   |                        | LIMITS              |               |      | UNIT |    |
|-----------------|--|---|------------------------|---------------------|---------------|------|------|----|
|                 |  |   |                        | MIN                 | TYP<br>NO TAG | MAX  |      |    |
| V <sub>OH</sub> | High-level output voltage                      | V <sub>CC</sub> = MIN,<br>V <sub>IL</sub> = MAX,<br>V <sub>IH</sub> = MIN                     | I <sub>OH</sub> = -1mA | ±10%V <sub>CC</sub> | 2.5           |      | V    |    |
|                 |  |   |                        | ±5%V <sub>CC</sub>  | 2.7           | 3.4  | V    |    |
| V <sub>OL</sub> | Low-level output voltage                       | V <sub>CC</sub> = MIN, V <sub>IL</sub> = MAX,<br>V <sub>IH</sub> = MIN, I <sub>OL</sub> = MAX |                        | ±10%V <sub>CC</sub> |               | 0.30 | 0.50 | V  |
|                 |  |   |                        | ±5%V <sub>CC</sub>  |               | 0.30 | 0.50 | V  |
| V <sub>IK</sub> | Input clamp voltage                            | V <sub>CC</sub> = MIN, I <sub>I</sub> = I <sub>IK</sub>                                       |                        |                     | -0.73         | -1.2 | V    |    |
| I <sub>I</sub>  | Input current at maximum input voltage         | V <sub>CC</sub> = MAX, V <sub>I</sub> = 7.0V  |                        |                     |               | 100  | μA   |    |
| I <sub>IH</sub> | High-level input current                       | V <sub>CC</sub> = MAX, V <sub>I</sub> = 2.7V  |                        |                     |               | 20   | μA   |    |
| I <sub>IL</sub> | Low-level input current                        | V <sub>CC</sub> = MAX, V <sub>I</sub> = 0.5V  |                        |                     |               | -20  | μA   |    |
| I <sub>OS</sub> | Short-circuit output current <sup>NO TAG</sup> | V <sub>CC</sub> = MAX   |                        |                     | -60           | -150 | mA   |    |
| I <sub>CC</sub> | Supply current (total)                         | I <sub>CCH</sub>  | V <sub>CC</sub> = MAX  |                     |               | 43   | 65   | mA |
|                 |  | I <sub>CCL</sub>  |                        |                     |               | 41   | 60   | mA |

**NOTES:**

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at V<sub>CC</sub> = 5V, T<sub>amb</sub> = 25°C.
- Not more than one output should be shorted at a time. For testing I<sub>OS</sub>, the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a High output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests, I<sub>OS</sub> tests should be performed last.

## 8-bit shift register with input storage registers

74F597

## AC ELECTRICAL CHARACTERISTICS

| SYMBOL                 | PARAMETER                        | TEST CONDITION     | LIMITS  |            |              |   |              | UNIT |
|------------------------|----------------------------------|--------------------|---|------------|--------------|---|--------------|------|
|                        |                                  |                    | $V_{CC} = +5V$<br>$T_{amb} = +25^{\circ}C$<br>$C_L = 50pF, R_L = 500\Omega$ |            |              | $V_{CC} = +5V \pm 10\%$<br>$T_{amb} = 0^{\circ}C \text{ to } +70^{\circ}C$<br>$C_L = 50pF, R_L = 500\Omega$ |              |      |
|                        |                                  |                    | MIN   | TYP        | MAX          | MIN   | MAX          |      |
| $f_{MAX}$              | Maximum clock frequency          | Waveform<br>NO TAG | 120   | 135        |              | 105   |              | MHz  |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation delay<br>SHCP to Qs  | Waveform<br>NO TAG | 7.0<br>6.0  | 8.5<br>7.5 | 11.0<br>10.0 | 6.0<br>5.5  | 12.5<br>10.5 | ns   |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation delay<br>SHLD to Qs  | Waveform<br>NO TAG | 8.0<br>6.0  | 9.5<br>7.5 | 12.0<br>10.0 | 7.0<br>5.5  | 13.5<br>11.0 | ns   |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation delay<br>STCP to Qs  | Waveform<br>NO TAG | 7.5<br>8.0  | 9.5<br>9.5 | 11.5<br>12.0 | 6.5<br>7.5  | 13.0<br>13.0 | ns   |
| $t_{PHL}$              | Propagation delay<br>SHRST to Qs | Waveform<br>NO TAG | 2.5   | 5.5        | 9.0          | 2.5   | 9.5          | ns   |


## AC SETUP REQUIREMENTS

| SYMBOL               | PARAMETER   | TEST CONDITION     | LIMITS  |     |     |   |     | UNIT |
|----------------------|---|--------------------|---|-----|-----|---|-----|------|
|                      |   |                    | $V_{CC} = +5V$<br>$T_{amb} = +25^{\circ}C$<br>$C_L = 50pF, R_L = 500\Omega$ |     |     | $V_{CC} = +5V \pm 10\%$<br>$T_{amb} = 0^{\circ}C \text{ to } +70^{\circ}C$<br>$C_L = 50pF, R_L = 500\Omega$ |     |      |
|                      |   |                    | MIN   | TYP | MAX | MIN   | MAX |      |
| $t_s(H)$<br>$t_s(L)$ | Setup time, High or Low<br>Dn to STCP                 | Waveform<br>NO TAG | 1.0<br>1.5  |     |     | 1.5<br>2.0  |     | ns   |
| $t_h(H)$<br>$t_h(L)$ | Hold time, High or Low<br>Dn to STCP                  | Waveform<br>NO TAG | 2.0<br>2.0  |     |     | 2.0<br>3.0  |     | ns   |
| $t_s(H)$<br>$t_s(L)$ | Setup time, High or Low<br>Ds to SHCP                 | Waveform<br>NO TAG | 1.0<br>1.5  |     |     | 1.0<br>2.0  |     | ns   |
| $t_h(H)$<br>$t_h(L)$ | Hold time, High or Low<br>Ds to SHCP                  | Waveform<br>NO TAG | 1.5<br>2.0  |     |     | 2.0<br>2.5  |     | ns   |
| $t_s(H)$             | Setup time, High<br>STCP to SHLD $\uparrow$           | Waveform 4         | 8.5   |     |     | 9.0   |     | ns   |
| $t_h(L)$             | Hold time, Low<br>STCP to SHLD $\uparrow$ (hold mode) | Waveform<br>NO TAG | 0.0   |     |     | 0.0   |     | ns   |
| $t_s(H)$             | Setup time, High<br>SHLD to SHCP $\uparrow$           | Waveform<br>NO TAG | 6.0   |     |     | 6.5   |     | ns   |
| $t_W(H)$<br>$t_W(L)$ | SHCP Pulse width<br>High or Low                       | Waveform<br>NO TAG | 4.5<br>4.5  |     |     | 5.5<br>4.5  |     | ns   |
| $t_W(H)$<br>$t_W(L)$ | STCP Pulse width<br>High or Low                       | Waveform<br>NO TAG | 4.5<br>4.5  |     |     | 5.0<br>4.5  |     | ns   |
| $t_W(L)$             | SHRST Pulse width, Low                                | Waveform<br>NO TAG | 4.5   |     |     | 4.5   |     | ns   |
| $t_W(L)$             | SHLD Pulse width, Low                                 | Waveform<br>NO TAG | 4.5   |     |     | 4.5   |     | ns   |
| $t_{REC}$            | Recovery time, SHRST to SHCP                          | Waveform<br>NO TAG | 2.0   |     |     | 2.5   |     | ns   |

# 8-bit shift register with input storage registers

74F597

## TYPICAL TIMING DIAGRAM

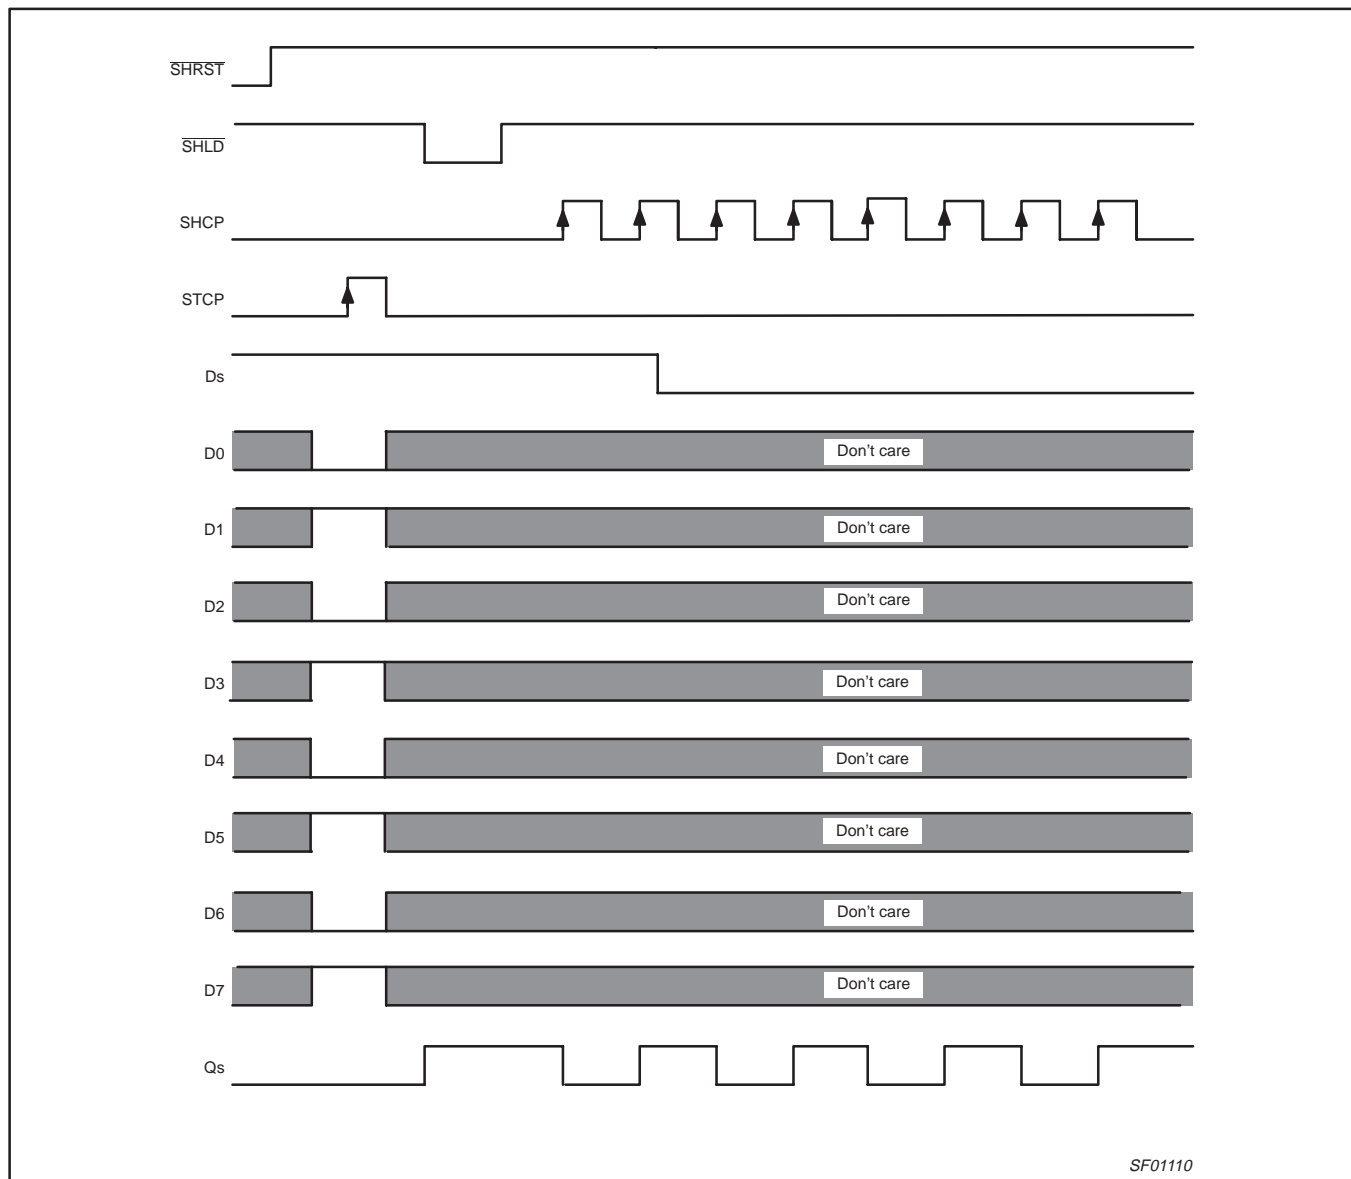


# 8-bit shift register with input storage registers

74F597


## AC WAVEFORMS

For all waveforms,  $V_M = 1.5V$ .


The shaded areas indicate when the input is permitted to change for predictable output performance.

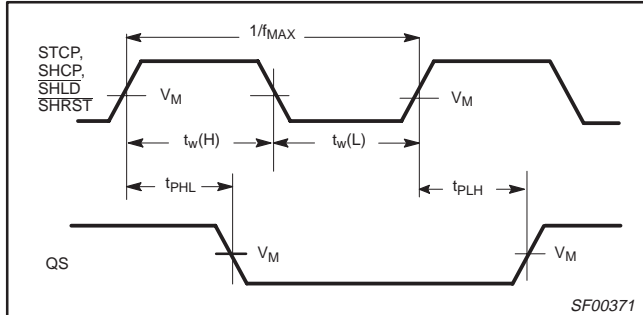


**Waveform 1. Propagation Delay, Clock Input to Output, Clock Pulse Widths, and Maximum Clock Frequency, Shift Register Reset and Load Inputs to Serial Data Output**

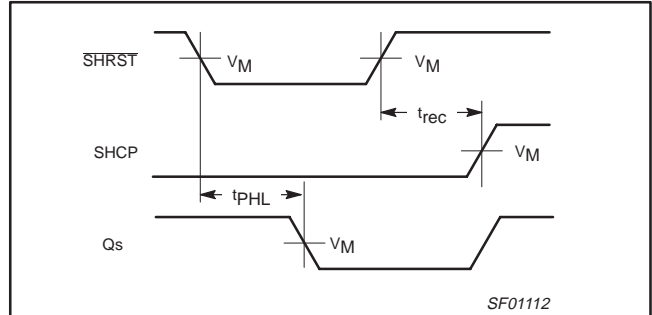

**Waveform 2. Propagation Delay, Shift Register Reset and Load Inputs to Serial Data Output, Shift Register Reset and Load Inputs to Shift Register Clock Pulse Input Recovery Time**

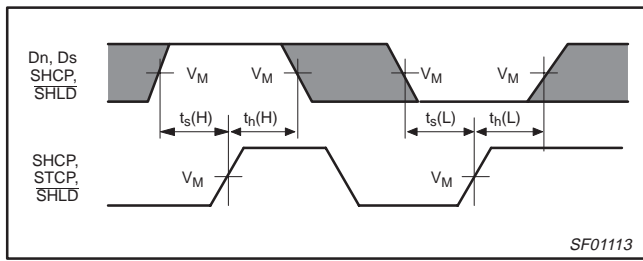


**Waveform 3. Setup and Hold Times**

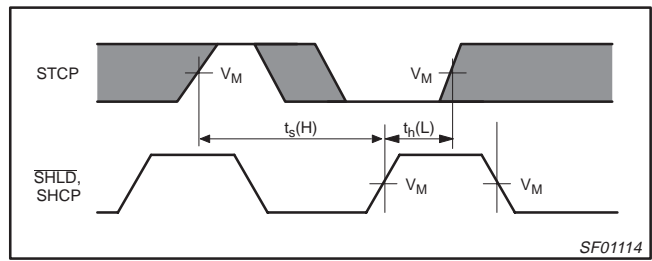


**Waveform 4. Setup and Hold Time**

## TEST CIRCUIT AND WAVEFORMS

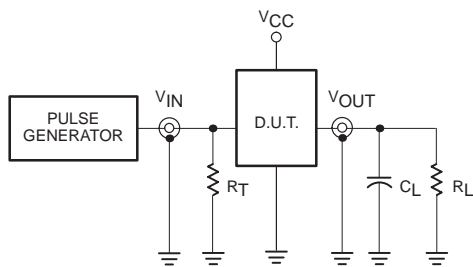

**Test Circuit for Totem-Pole Outputs**

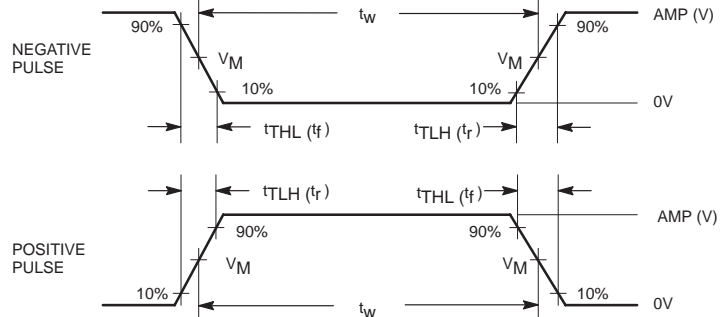

**Input Pulse Definition**

**DEFINITIONS:**

- $R_L$  = Load resistor; see AC ELECTRICAL CHARACTERISTICS for value.
- $C_L$  = Load capacitance includes jig and probe capacitance; see AC ELECTRICAL CHARACTERISTICS for value.
- $R_T$  = Termination resistance should be equal to  $Z_{OUT}$  of pulse generators.

| family | INPUT PULSE REQUIREMENTS |       |           |       |           |           |
|--------|--------------------------|-------|-----------|-------|-----------|-----------|
|        | amplitude                | $V_M$ | rep. rate | $t_w$ | $t_{TLH}$ | $t_{THL}$ |
| 74F    | 3.0V                     | 1.5V  | 1MHz      | 500ns | 2.5ns     | 2.5ns     |


SF00006

# 8-bit shift register with input storage registers

74F597

DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4

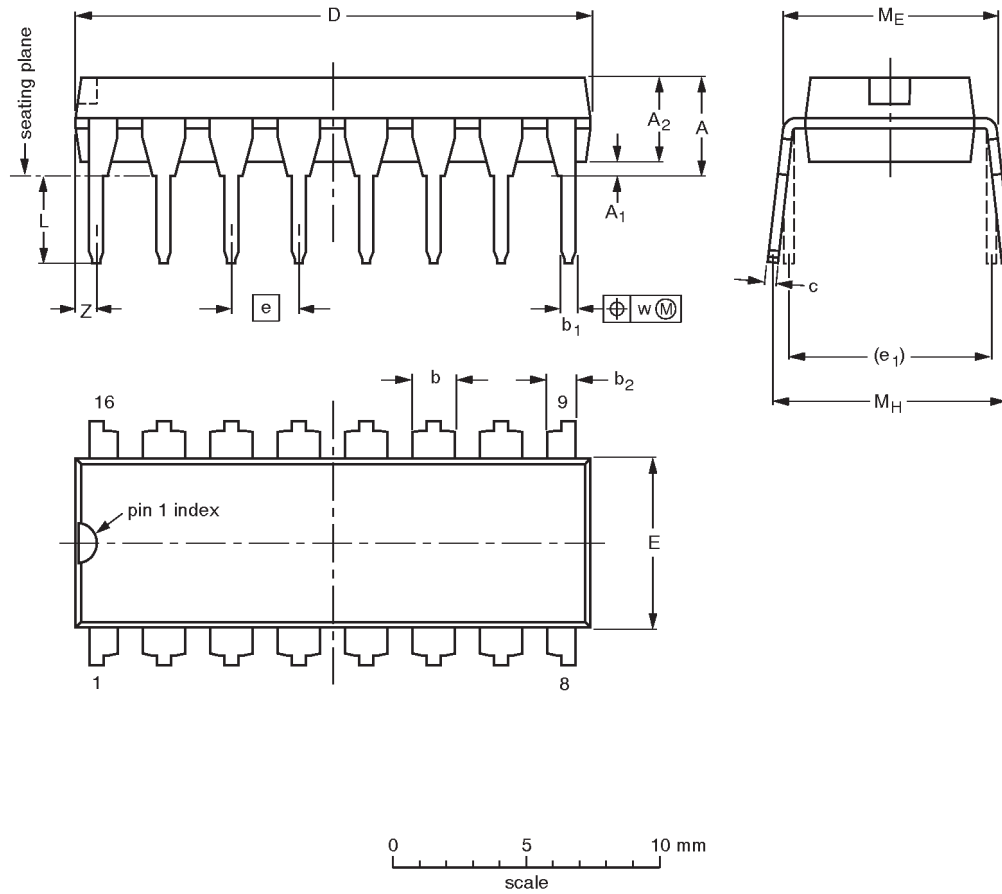

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT   | A max. | A <sub>1</sub> min. | A <sub>2</sub> max. | b              | b <sub>1</sub> | b <sub>2</sub> | c              | D <sup>(1)</sup> | E <sup>(1)</sup> | e    | e <sub>1</sub> | L            | M <sub>E</sub> | M <sub>H</sub> | w     | Z <sup>(1)</sup> max. |
|--------|--------|---------------------|---------------------|----------------|----------------|----------------|----------------|------------------|------------------|------|----------------|--------------|----------------|----------------|-------|-----------------------|
| mm     | 4.2    | 0.51                | 3.2                 | 1.73<br>1.30   | 0.53<br>0.38   | 1.25<br>0.85   | 0.36<br>0.23   | 19.50<br>18.55   | 6.48<br>6.20     | 2.54 | 7.62           | 3.60<br>3.05 | 8.25<br>7.80   | 10.0<br>8.3    | 0.254 | 0.76                  |
| inches | 0.17   | 0.020               | 0.13                | 0.068<br>0.051 | 0.021<br>0.015 | 0.049<br>0.033 | 0.014<br>0.009 | 0.77<br>0.73     | 0.26<br>0.24     | 0.10 | 0.30           | 0.14<br>0.12 | 0.32<br>0.31   | 0.39<br>0.33   | 0.01  | 0.030                 |

**Note**

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.



| OUTLINE VERSION | REFERENCES |       |      |  | EUROPEAN PROJECTION | ISSUE DATE           |
|-----------------|------------|-------|------|--|---------------------|----------------------|
|                 | IEC        | JEDEC | EIAJ |  |                     |                      |
| SOT38-4         |            |       |      |  |                     | 92-11-17<br>95-01-14 |

# 8-bit shift register with input storage registers

## 74F597

**SO16: plastic small outline package; 16 leads; body width 3.9 mm**

**SOT109-1**

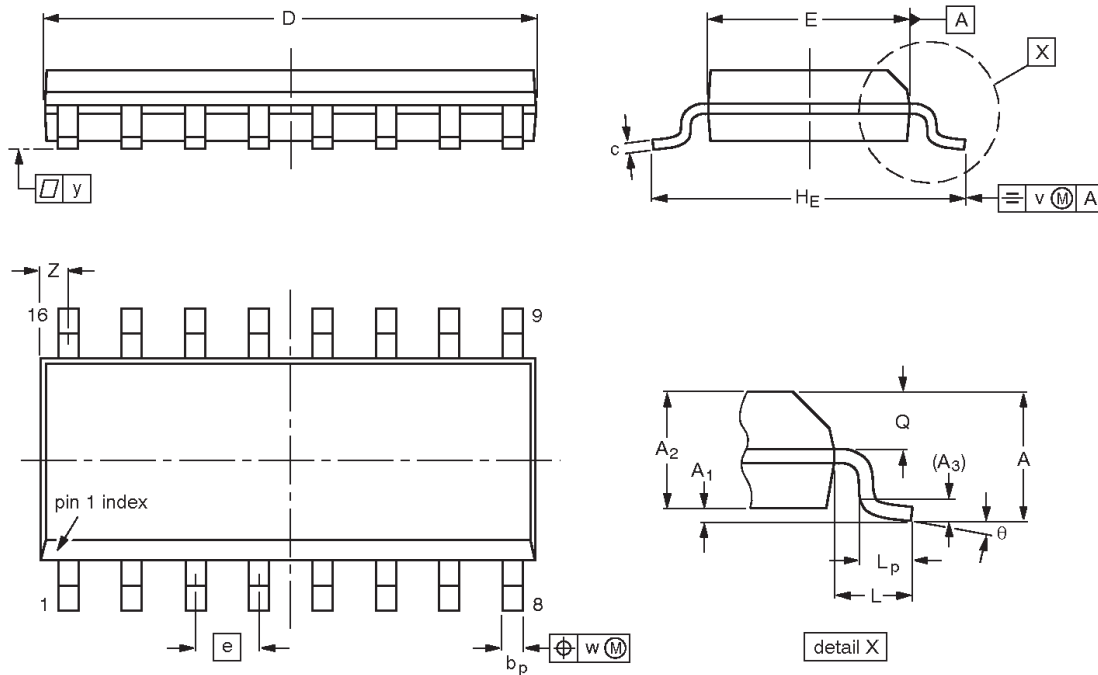

**DIMENSIONS (inch dimensions are derived from the original mm dimensions)**

| UNIT   | A max.         | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | b <sub>p</sub> | c                | D <sup>(1)</sup> | E <sup>(1)</sup> | e     | H <sub>E</sub> | L     | L <sub>p</sub> | Q              | v    | w    | y     | Z <sup>(1)</sup> | θ        |
|--------|----------------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|-------|----------------|-------|----------------|----------------|------|------|-------|------------------|----------|
| mm     | 1.75<br>0.10   | 0.25<br>1.25   | 1.45<br>0.049  | 0.25<br>0.019  | 0.49<br>0.36   | 0.25<br>0.19     | 10.0<br>9.8      | 4.0<br>3.8       | 1.27  | 6.2<br>5.8     | 1.05  | 1.0<br>0.4     | 0.7<br>0.6     | 0.25 | 0.25 | 0.1   | 0.7<br>0.3       | 8°<br>0° |
| inches | 0.069<br>0.004 | 0.010<br>0.049 | 0.057<br>0.014 | 0.01<br>0.0075 | 0.019<br>0.014 | 0.0100<br>0.0075 | 0.39<br>0.38     | 0.16<br>0.15     | 0.050 | 0.244<br>0.228 | 0.041 | 0.039<br>0.016 | 0.028<br>0.020 | 0.01 | 0.01 | 0.004 | 0.028<br>0.012   |          |

**Note**

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

| OUTLINE VERSION | REFERENCES |          |      |  | EUROPEAN PROJECTION | ISSUE DATE           |
|-----------------|------------|----------|------|--|---------------------|----------------------|
|                 | IEC        | JEDEC    | EIAJ |  |                     |                      |
| SOT109-1        | 076E07S    | MS-012AC |      |  |                     | 95-01-23<br>97-05-22 |

---

8-bit shift register with input storage registers

74F597

---

**NOTES**

## 8-bit shift register with input storage registers

74F597

## Data sheet status

| Data sheet status         | Product status | Definition [1]   |
|---------------------------|----------------|--|
| Objective specification   | Development    | This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.  |
| Preliminary specification | Qualification  | This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| Product specification     | Production     | This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.   |

[1] Please consult the most recently issued datasheet before initiating or completing a design.

## Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors  
811 East Arques Avenue  
P.O. Box 3409  
Sunnyvale, California 94088-3409  
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 1998  
All rights reserved. Printed in U.S.A.

print code

Date of release: 10-98

Document order number:

9397-750-05144

*Let's make things better.*



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.