


Silicon Controlled Rectifier Series 40C

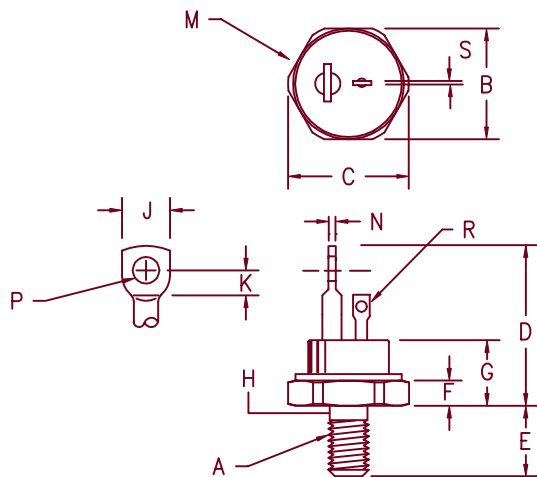

Note 1: 1/4-28 UNF-3A

Note 2: Full thread within 2 1/2 threads

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	.677	.685	17.20	17.40	
C	---	.770	---	19.56	
D	1.200	1.250	30.48	31.75	
E	.427	.447	10.84	11.35	
F	.115	.155	2.92	3.94	
G	---	.515	---	13.08	
H	---	.249	---	6.32	2
J	.200	.300	5.08	7.62	
K	.120	---	3.05	---	
M	---	.667	---	16.94	Dia.
N	.065	.085	1.65	2.15	
P	.145	.155	3.68	3.93	Dia.
R	.055	.065	1.40	1.65	
S	.025	.030	.64	.76	

TO-208AC (TO-65)

Microsemi Catalog Number	Forward & Reverse Repetitive Blocking VDRM, VRRM	Reverse Transient Blocking
40C20B	200	300
40C40B	400	500
40C60B	600	700
40C80B	800	900
40C100B	1000	1100
40C120B	1200	1300

To specify dv/dt other than 200V/usec., contact factory.

- dv/dt-200 V/usec
- 1000 Amperes surge current
- Economical for medium power applications
- Compact TO-208AC package

Electrical Characteristics

Max. RMS on-state current	$I_T(\text{RMS})$ 63 Amps	$T_C = 102^\circ\text{C}$
Max. average on-state cur.	$I_T(\text{AV})$ 40 Amps	$T_C = 102^\circ\text{C}$
Max. peak on-state voltage	V_{TM} 3.0 Volts	$I_{TM} = 500 \text{ A(peak)}$
Max. holding current	I_H 200 mA	
Max. peak one cycle surge current	I_{TSM} 1000 A	$T_C = 120^\circ\text{C}, 60\text{Hz}$
Max. I^2t capability for fusing	I^2t 4100A ² S	$t = 8.3 \text{ ms}$

Thermal and Mechanical Characteristics

Operating junction temp range	T_J	-65°C to 125°C
Storage temperature range	T_{STG}	-65°C to 150°C
Maximum thermal resistance	$R_{\theta JC}$	0.35°C/W Junction to case
Typical thermal resistance	$R_{\theta CS}$	0.20°C/W Case to sink
Mounting torque		25-30 inch pounds
Weight		0.56 ounces (16 grams) typical

8-31-00 Rev. 2

40C

$T_J = 25^\circ\text{C}$ unless otherwise indicated

Switching

Critical rate of rise of on-state current (note 1)	di/dt	200A/usec.	$T_J = 125^\circ\text{C}$
Typical delay time (note 1)	t_d	3.0 usec.	
Typical circuit commuted turn-off time (note 2)	t_q	100 usec.	$T_J = 125^\circ\text{C}$

Note 1: $I_{TM} = 50\text{A}$, $V_D = V_{DRM}$. $GT = 12\text{V}$ open circuit, 20 ohm-0.1 usec. rise time
 Note 2: $I_{TM} = 50\text{A}$, $di/dt = 5\text{A/usec.}$, V_R during turn-off interval = 50V min.,
 reapplied $dv/dt = 20\text{V/usec.}$, linear to rated V_{DRM} , $V_{GT} = 0\text{V}$

Triggering

Max. gate voltage to trigger	V_{GT}	3.0V	$T_J = 125^\circ\text{C}$
Max. nontriggering gate voltage	V_{GD}	0.25V	
Max. gate current to trigger	I_{GT}	100mA	$t_p = 10\text{ usec.}$
Max. peak gate power	P_{GM}	10W	
Average gate power	$P_{G(AV)}$	1.0W	
Max. peak gate current	I_{GM}	3.0A	
Max. peak gate voltage (forward)	V_{GM}	20V	
Max. peak gate voltage (reverse)	V_{GM}	10V	

Blocking

Max. leakage current	I_{DRM}	6mA	$T_J = 125^\circ\text{C}$ & V_{DRM}
Max. reverse leakage	I_{RRM}	6mA	$T_J = 125^\circ\text{C}$ & V_{RRM}
Critical rate of rise of off-state voltage	dv/dt	200V/usec.	$T_J = 125^\circ\text{C}$

40C

Figure 1
Typical Forward On-State Characteristics

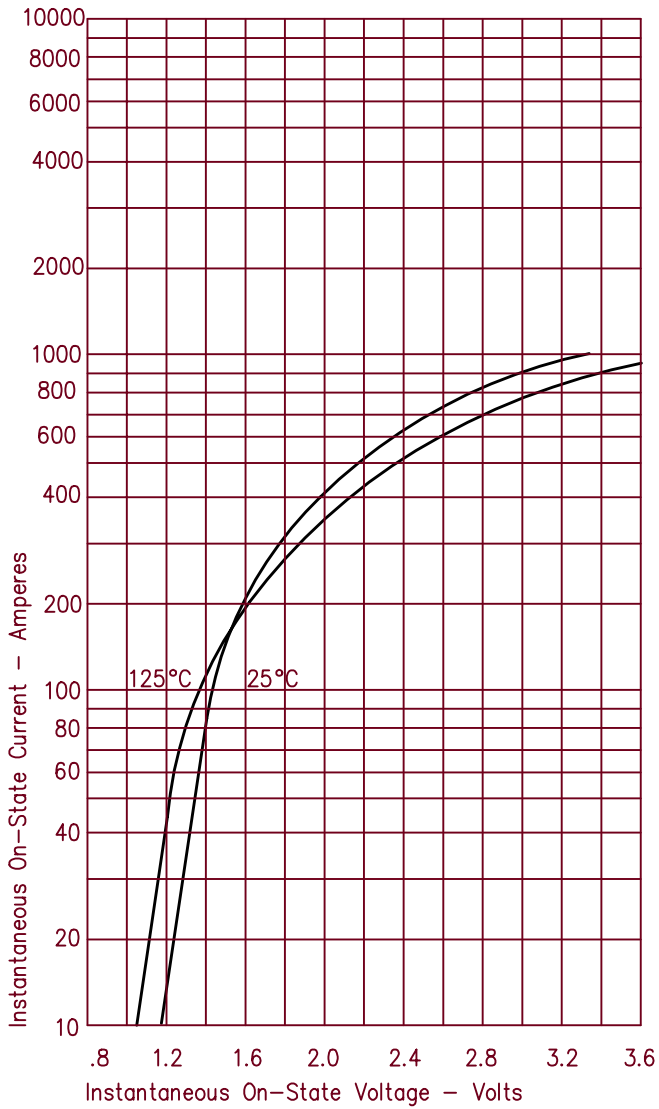


Figure 3
Maximum Power Dissipation

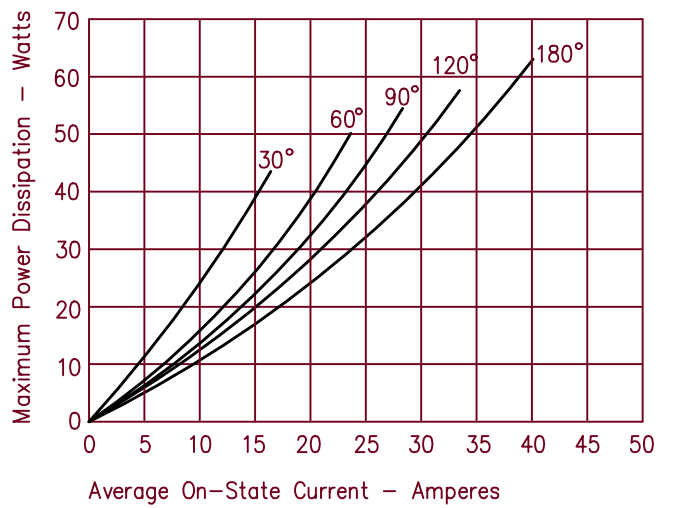


Figure 4
Transient Thermal Impedance

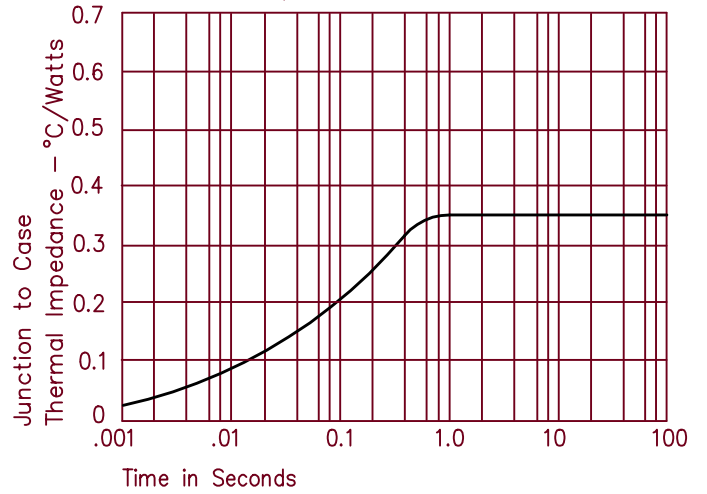


Figure 2
Forward Current Derating


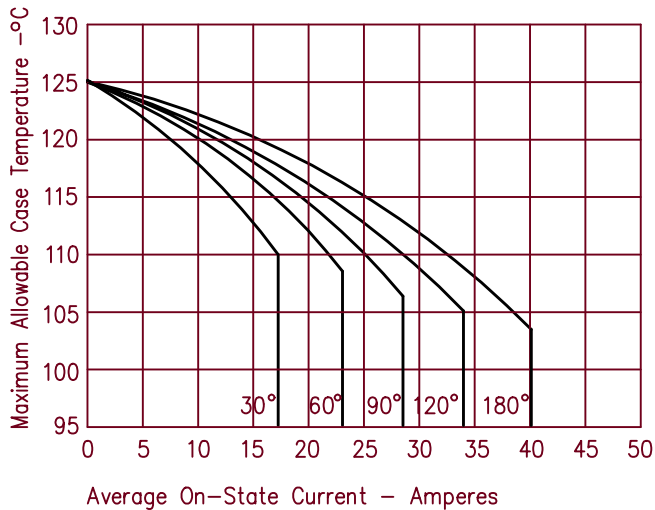


Figure 5
Maximum Nonrepetitive Surge Current



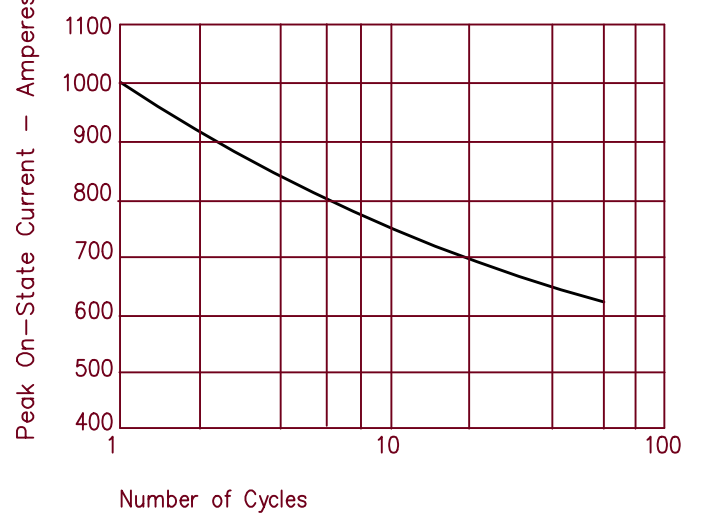

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.