




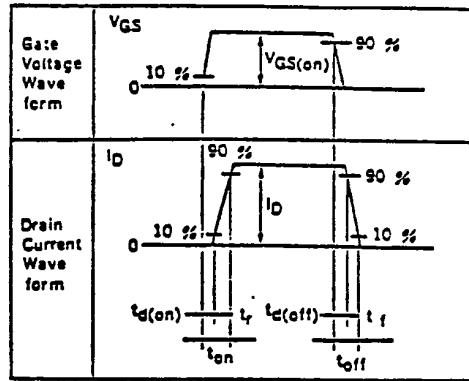


TURN-ON AND TURN-OFF TIME TEST CIRCUIT

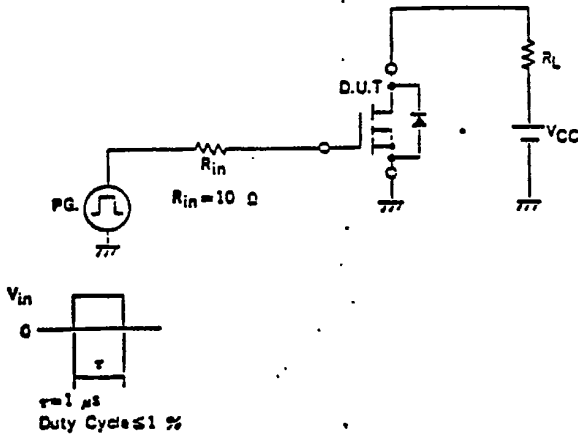


DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA

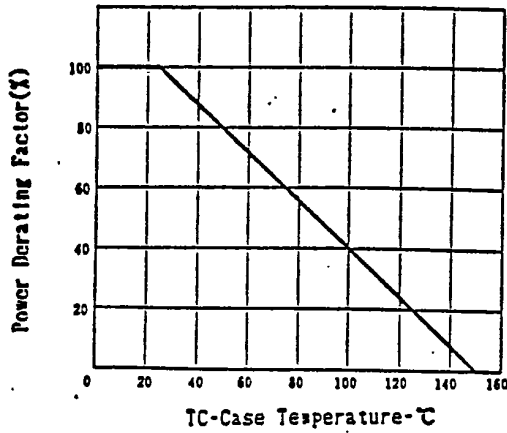


FORWARD BIAS SAFE OPERATING AREA






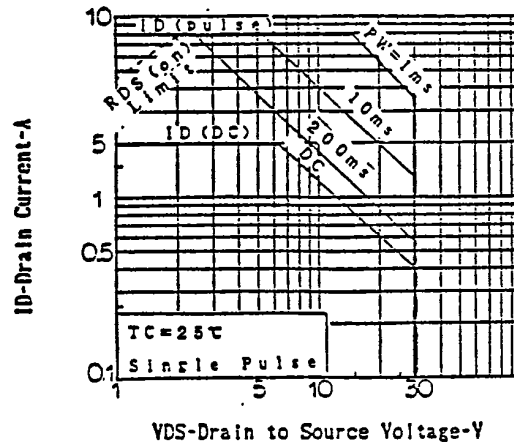


TOTAL POWER DISSIPATION vs. CASE TEMPERATURE

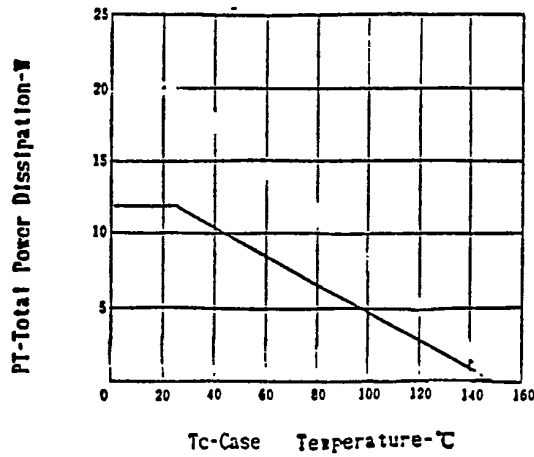


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

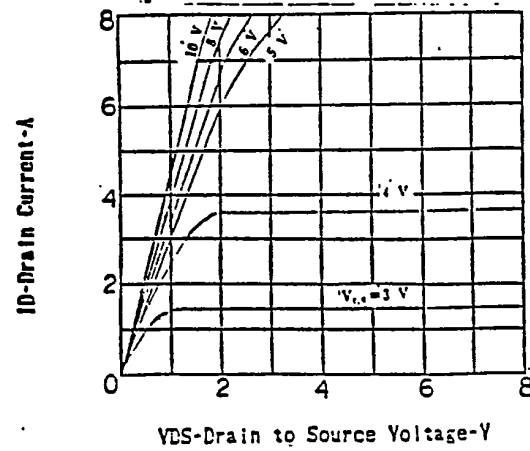


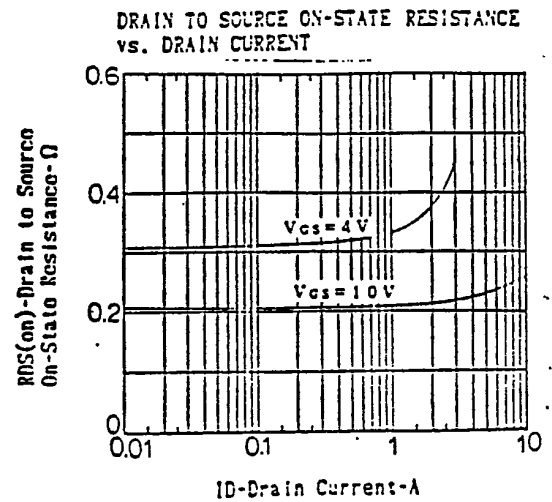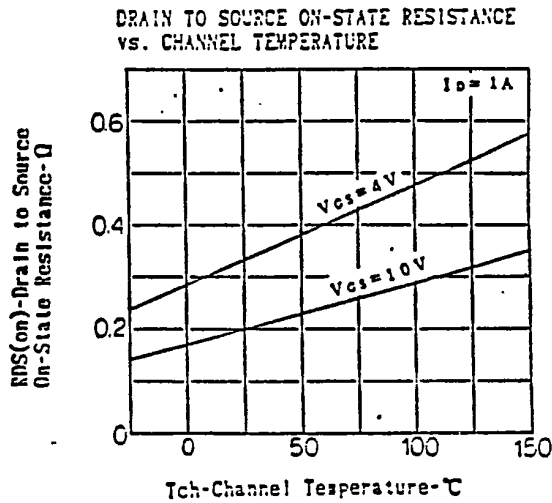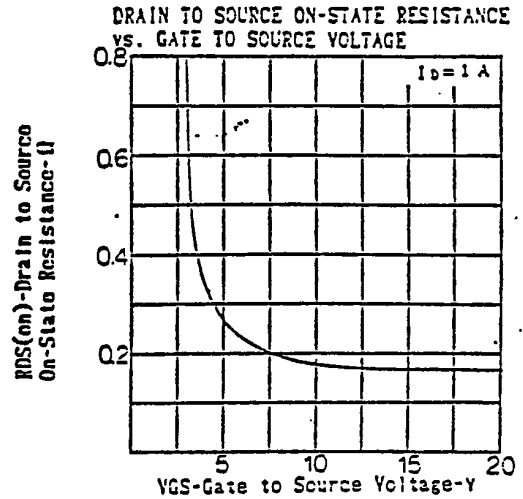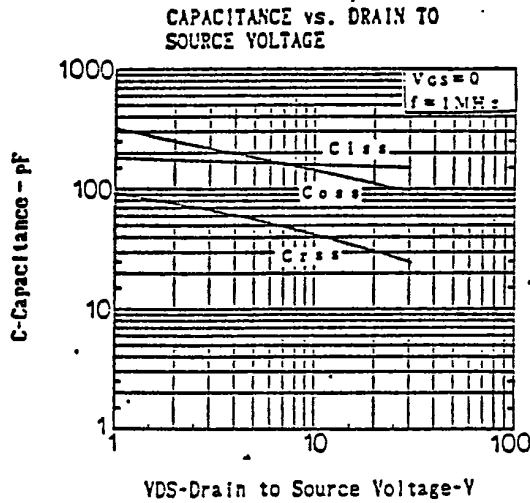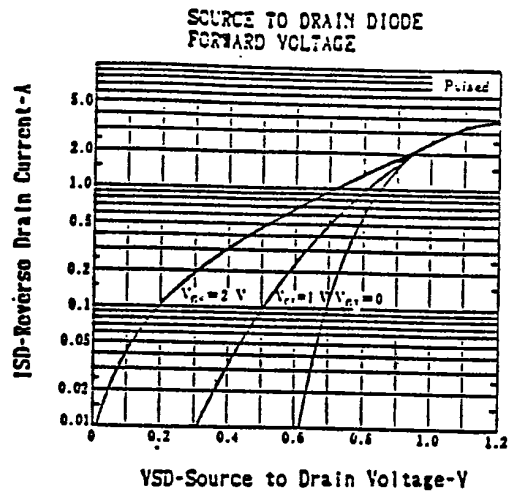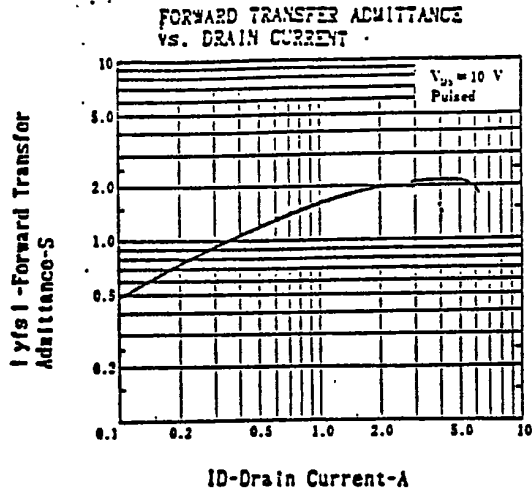


TRANSFER CHARACTERISTICS

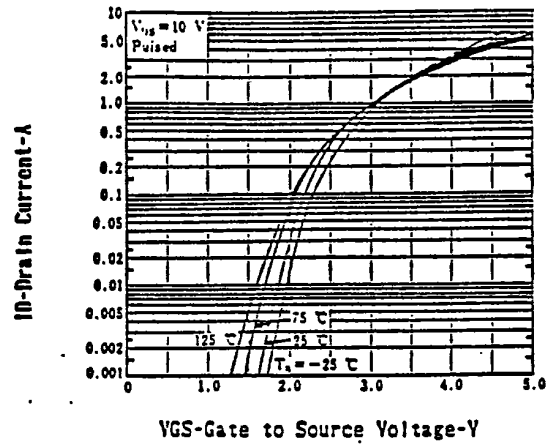

GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

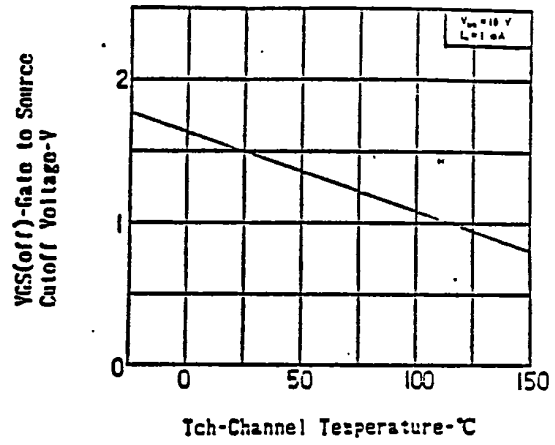

SWITCHING CHARACTERISTICS

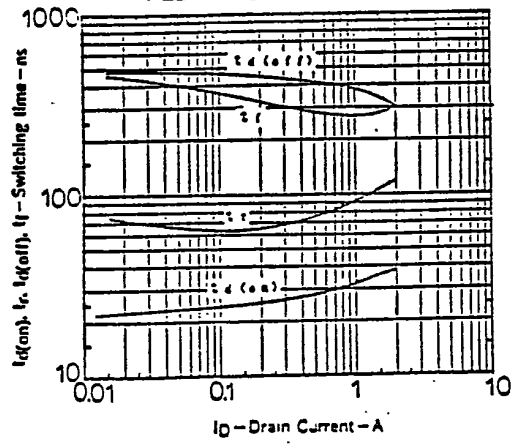

NEC Corporation

INTERNATIONAL ELECTRON DEVICES DIV.  
 NEC Building, 33-1, Shiba Gochome  
 Minato-ku, Tokyo 1CS, Japan  
 Tel: Tokyo 454-1111  
 Telex Address: NECTOK J22686  
 Cable Address: MICROPHONE TOKYO

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.