

FUJI POWER MOSFET Super FAP-G Series

N-CHANNEL SILICON POWER MOSFET

Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

Maximum ratings and characteristic Absolute maximum ratings

(T_c=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V _{DS}	600	V
	V _{DSX} *5	600	V
Continuous drain current	I _D	±17	A
Pulsed drain current	I _{D(puls)}	±68	A
Gate-source voltage	V _{GS}	±30	V
Repetitive or non-repetitive	IAR *2	17	A
Maximum Avalanche Energy	EAS *1	412	mJ
Maximum Drain-Source dV/dt	dV _{DS} /dt *4	20	kV/μs
Peak Diode Recovery dV/dt	dV/dt *3	5	kV/μs
Max. power dissipation	P _D	T _a =25°C	2.50
		T _c =25°C	220
Operating and storage temperature range	T _{ch}	+150	°C
	T _{stg}	-55 to +150	°C

*1 L=2.62mH, V_{CC}=60V *2 T_{ch}≤150°C *3 I_F≤-I_D, -di/dt=50A/μs, V_{CC}≤BV_{DSS}, T_{ch}≤150°C

*4 V_{DS}≤600V *5 V_{GS}=-30V


Electrical characteristics (T_c =25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V _{(BR)DSS}	I _D =250μA V _{GS} =0V	600			V
Gate threshold voltage	V _{GS(th)}	I _D =250μA V _{DS} =V _{GS}	3.0		5.0	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =600V V _{GS} =0V			25	μA
		V _{DS} =480V V _{GS} =0V			250	
Gate-source leakage current	I _{GSS}	V _{GS} =±30V V _{DS} =0V		10	100	nA
Drain-source on-state resistance	R _{DS(on)}	I _D =8.5A V _{GS} =10V		0.29	0.37	Ω
Forward transconductance	g _{fs}	I _D =8.5A V _{DS} =25V	10	20		S
Input capacitance	C _{iss}	V _{DS} =25V		2280	3420	pF
Output capacitance	C _{oss}	V _{GS} =0V		290	435	
Reverse transfer capacitance	C _{rss}	f=1MHz		16	24	
Turn-on time t _{on}	td(on)	V _{CC} =300V I _D =8.5A		26	39	ns
	t _r	V _{GS} =10V		37	56	
Turn-off time t _{off}	td(off)	R _{GS} =10 Ω		78	117	
	t _f			13	19	
Total Gate Charge	Q _G	V _{CC} =300V		54	81	nC
Gate-Source Charge	Q _{GS}	I _D =17A		15	23	
Gate-Drain Charge	Q _{GD}	V _{GS} =10V		20	30	
Avalanche capability	I _{AV}	L=2.62mH T _{ch} =25°C	17			A
Diode forward on-voltage	V _{SD}	I _F =17A V _{GS} =0V T _{ch} =25°C		0.93	1.50	V
Reverse recovery time	t _{rr}	I _F =17A V _{GS} =0V		0.7		μs
Reverse recovery charge	Q _{rr}	-di/dt=100A/μs T _{ch} =25°C		10.0		μC


Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R _{th(ch-c)}	channel to case			0.568	°C/W
	R _{th(ch-a)}	channel to ambient			50.0	°C/W







Outline Drawings






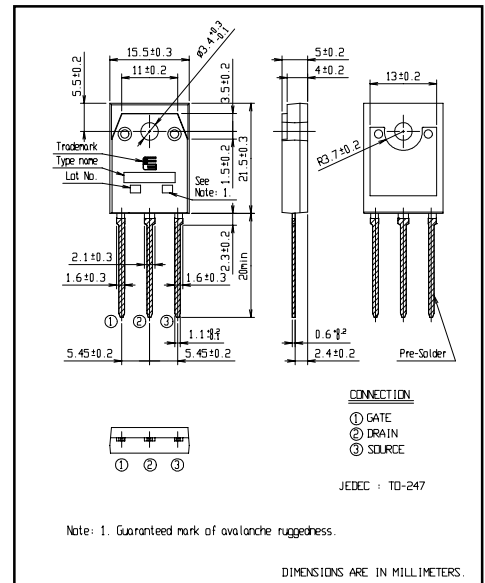




Equivalent circuit schematic

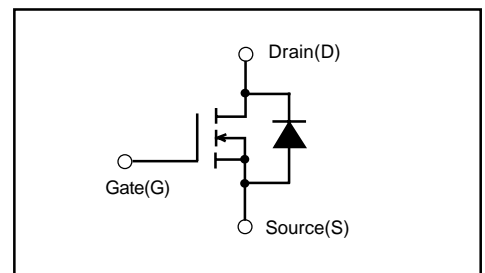

■ Characteristics

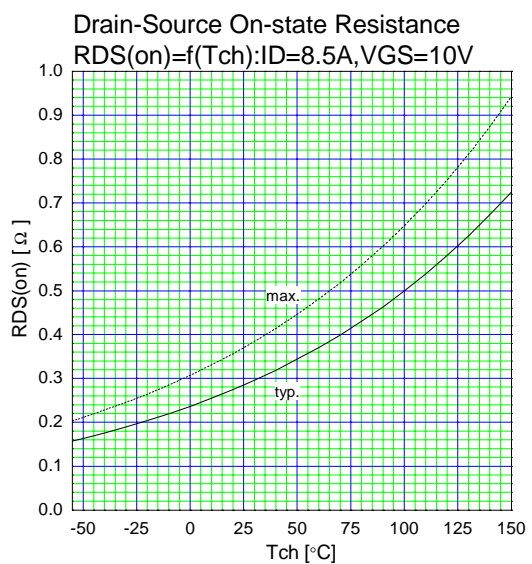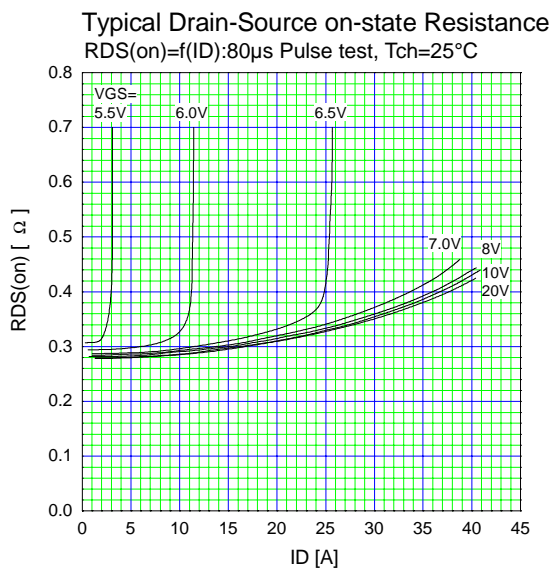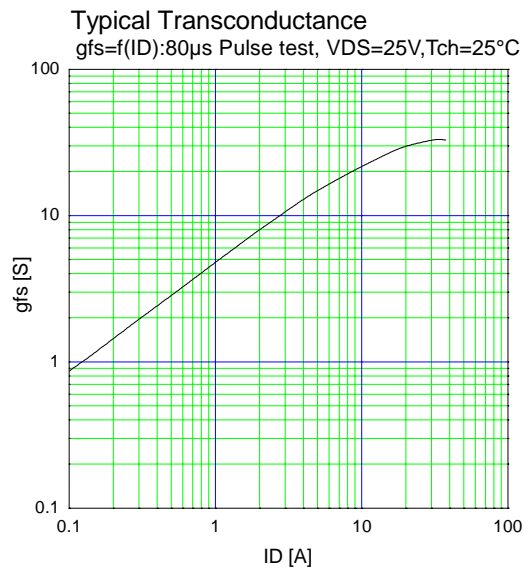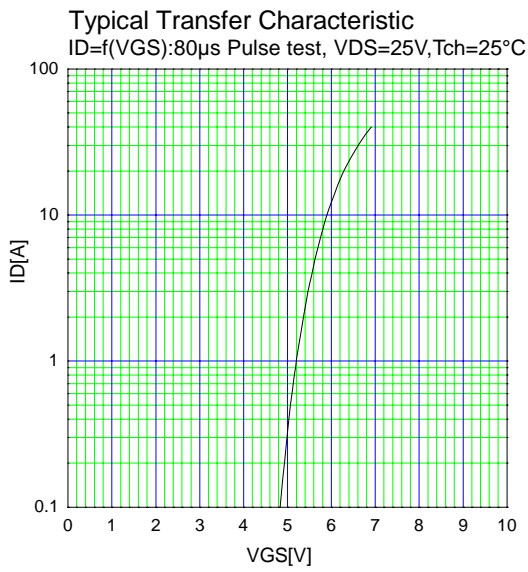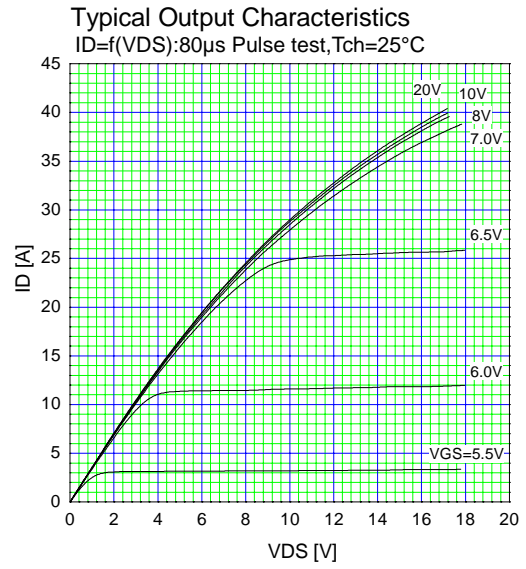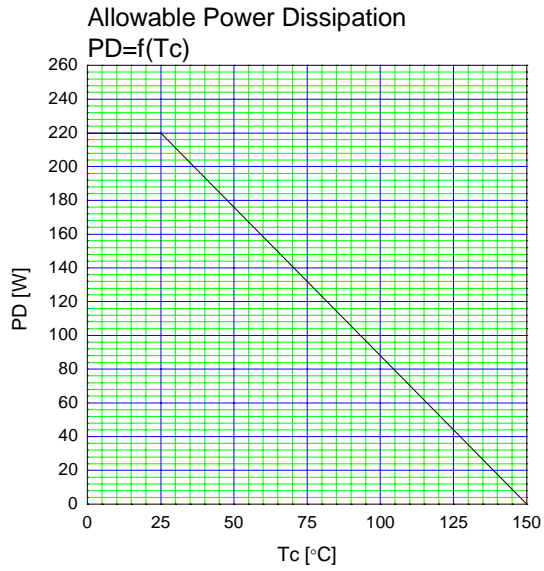

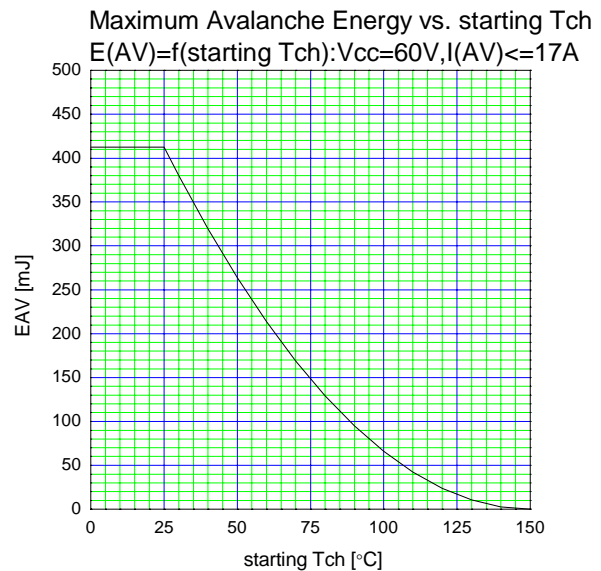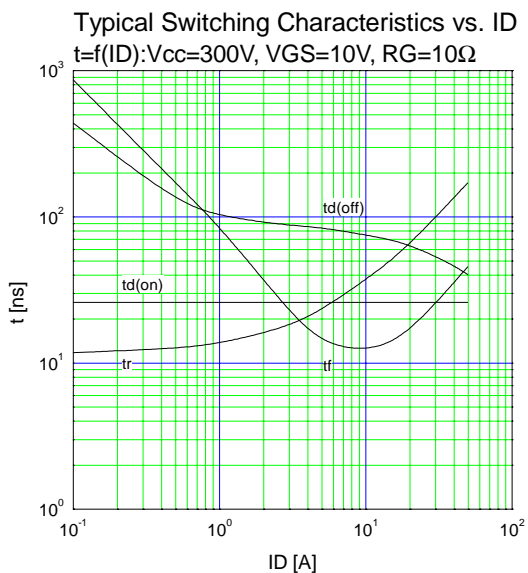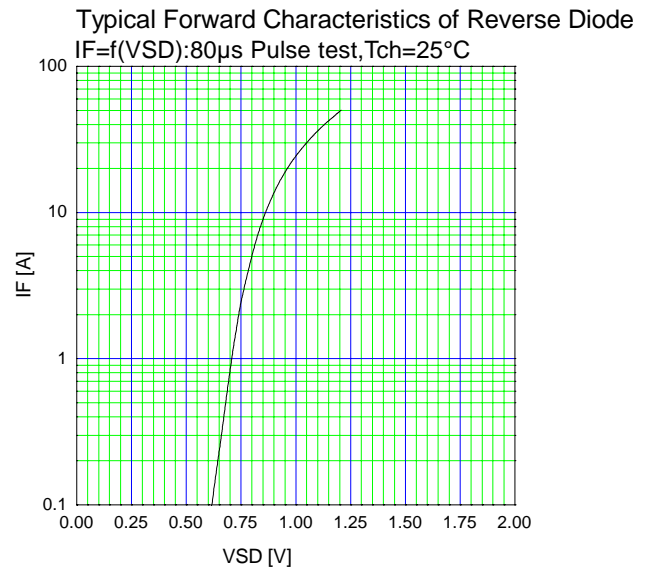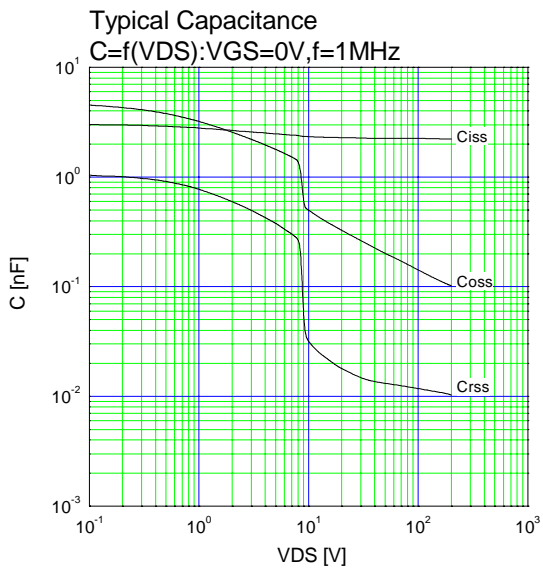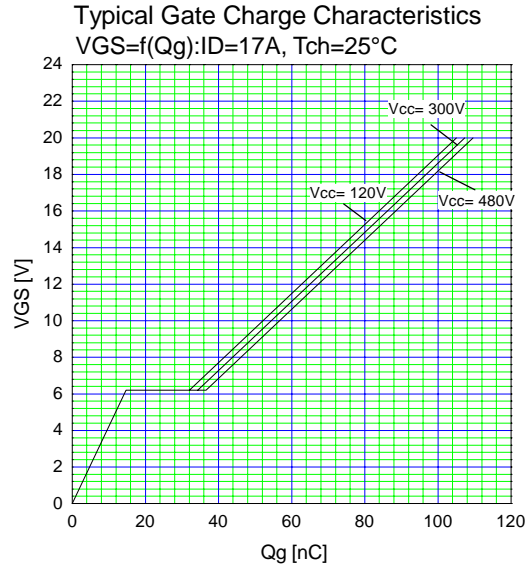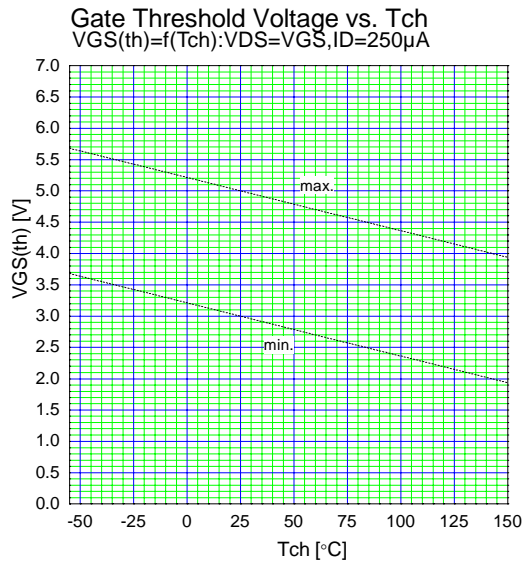

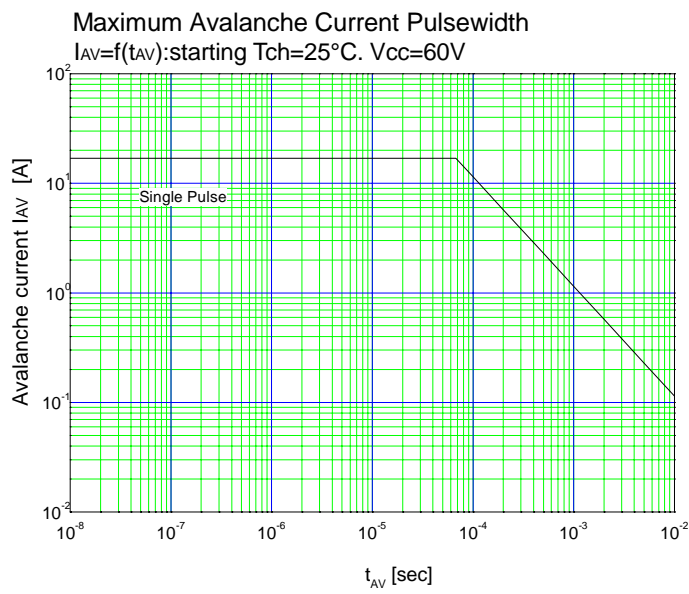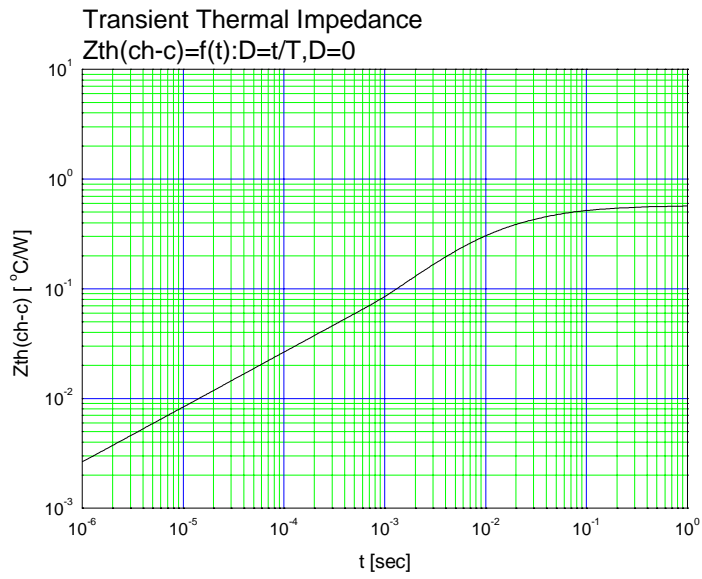

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.