

N-CHANNEL SILICON POWER MOS-FET

Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

Applications


- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

Maximum ratings and characteristic Absolute maximum ratings


(T_c=25°C unless otherwise specified)

Item	Symbol	Rating	Unit
Drain-source voltage	V _{DS}	500	V
Continuous drain current	I _D	±27	A
Pulsed drain current	I _{D(puls)}	±108	A
Gate-source voltage	V _{GS}	±30	V
Repetitive or non-repetitive	IAR *2	27	A
Maximum Avalanche Energy	EAV *1	914	mJ
Max. power dissipation	P _D	400	W
Operating and storage temperature range	T _{ch} T _{stg}	+150 -55 to +150	°C

*1 L=2.30mH, V_{CC}=50V *2 T_{ch} ≤ 150°C

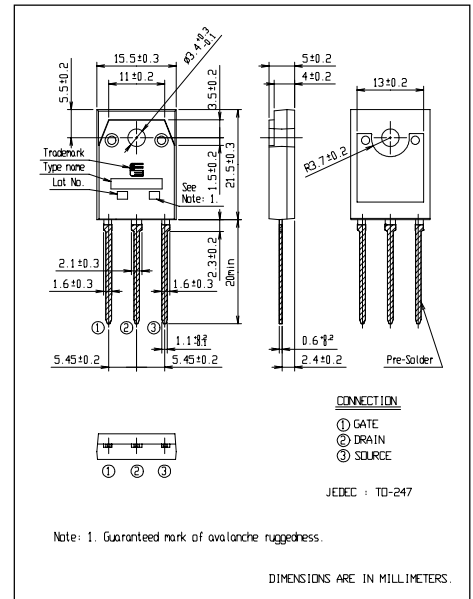

Equivalent circuit schematic

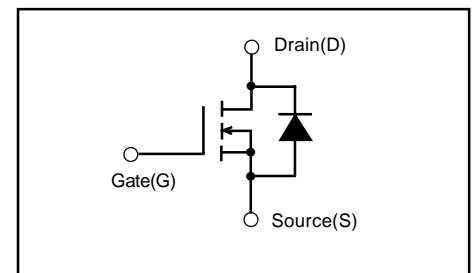







Electrical characteristics (T_c =25°C unless otherwise specified)







Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V _{(BR)DSS}	I _D =1mA V _{GS} =0V	500			V
Gate threshold voltage	V _{GS(th)}	I _D =1mA V _{DS} =V _{GS}	2.5	3.0	3.5	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =500V V _{GS} =0V	T _{ch} =25°C	10	500	μA
			T _{ch} =125°C	0.2	1.0	mA
Gate-source leakage current	I _{GSS}	V _{GS} =±30V V _{DS} =0V		10	100	nA
Drain-source on-state resistance	R _{DS(on)}	I _D =13.5A V _{GS} =10V		0.16	0.2	Ω
Forward transconductance	g _{fs}	I _D =13.5A V _{DS} =25V	11	22		S
Input capacitance	C _{iss}	V _{DS} =25V V _{GS} =0V f=1MHz		4300	6450	pF
Output capacitance	C _{oss}			630	945	
Reverse transfer capacitance	C _{rss}			285	430	
Turn-on time t _{on}	t _{d(on)}	V _{CC} =300V I _D =27A V _{GS} =10V		40	60	ns
	t _r			145	220	
Turn-off time t _{off}	t _{d(off)}	R _{GS} =10Ω		315	475	ns
	t _f			150	225	
Total gate charge	Q _G	V _{CC} =250V		198	300	nC
Gate-Source charge	Q _{GS}	I _D =27A		38	60	
Gate-Drain charge	Q _{GD}	V _{GS} =10V		81	125	
Avalanche capability	I _{AV}	L=2.30mH T _{ch} =25°C	27			A
Diode forward on-voltage	V _{SD}	I _F =2xI _{DR} V _{GS} =0V T _{ch} =25°C		1.2	1.8	V
Reverse recovery time	t _{rr}	I _F =I _{DR} V _{GS} =0V		660		ns
Reverse recovery charge	Q _{rr}	-di/dt=100A/μs T _{ch} =25°C		15.0		μC



Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R _{th(ch-c)}	channel to case			0.3125	°C/W
	R _{th(ch-a)}	channel to ambient			50.0	°C/W

Characteristics

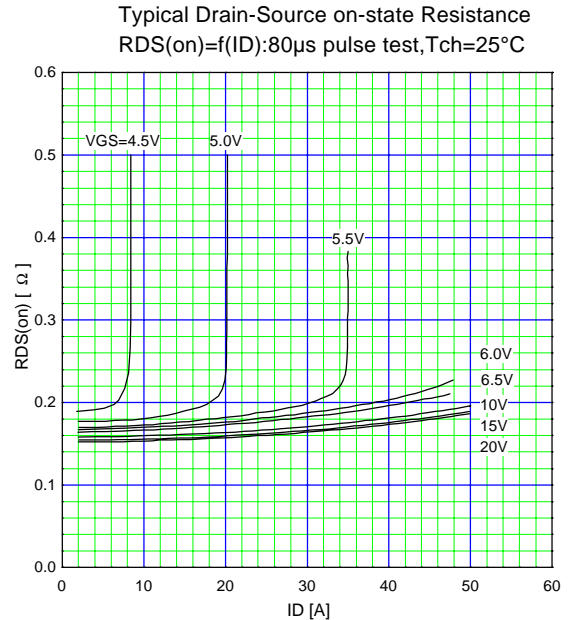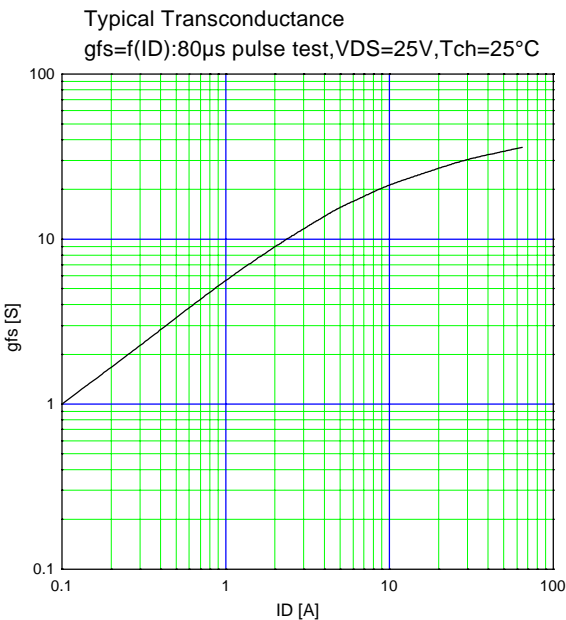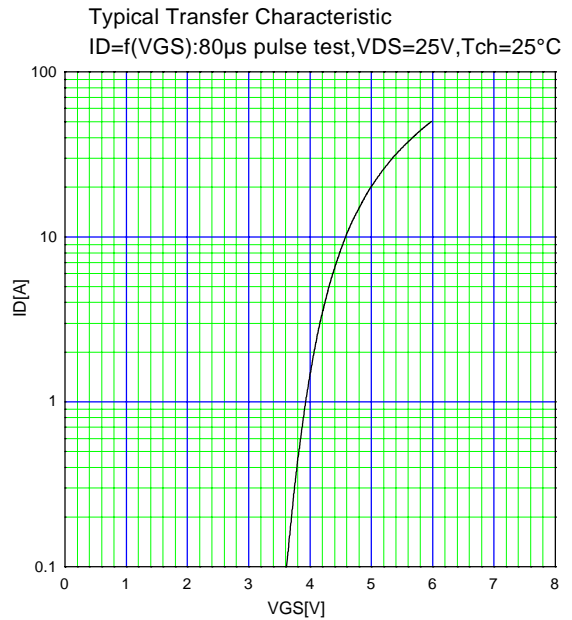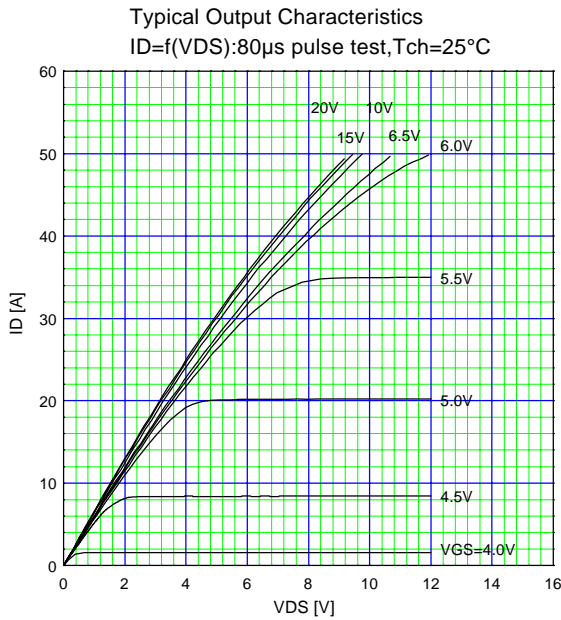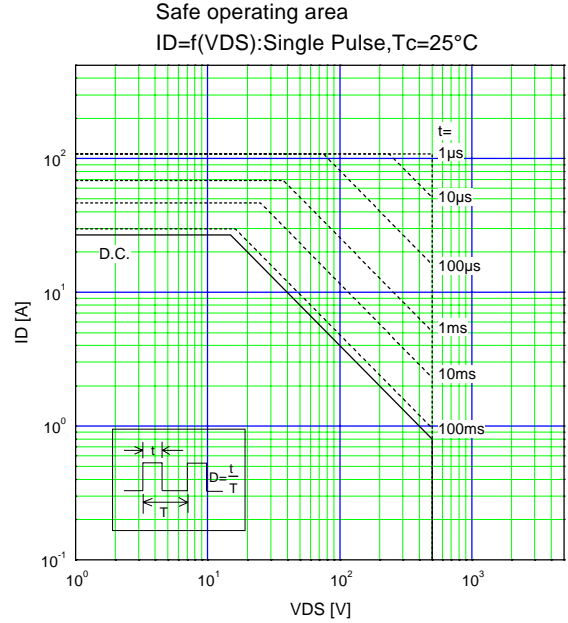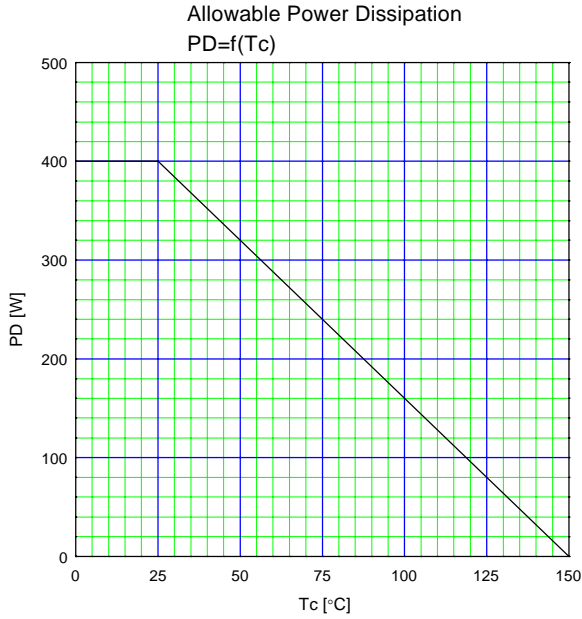

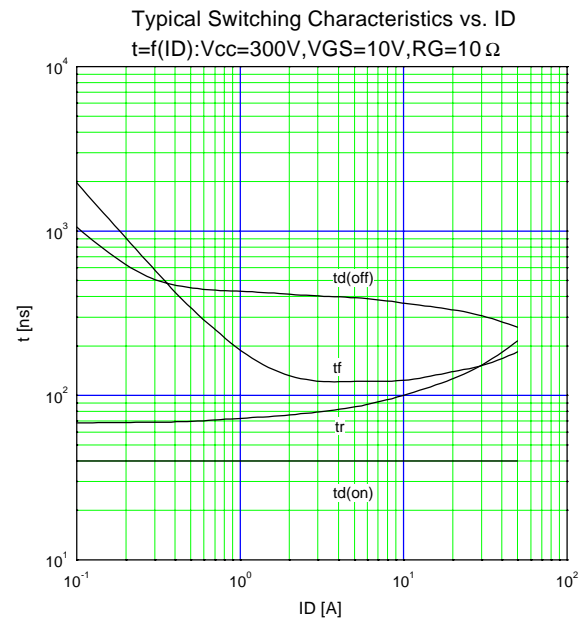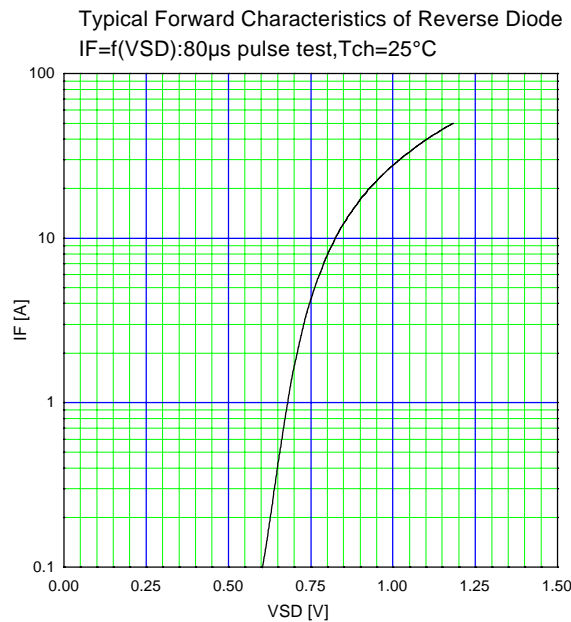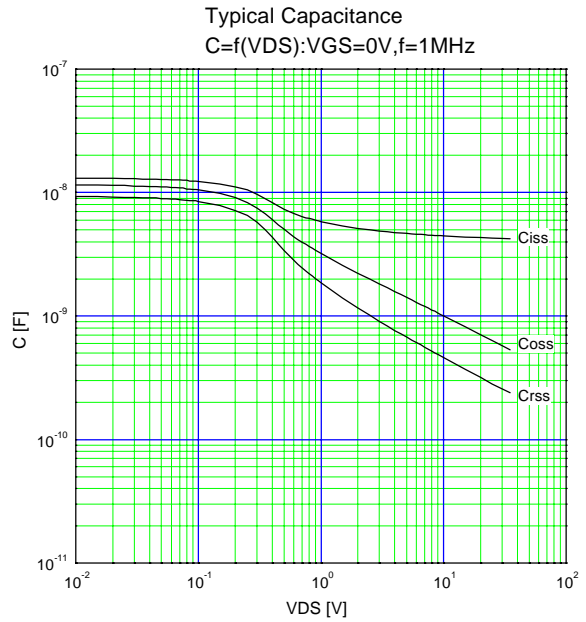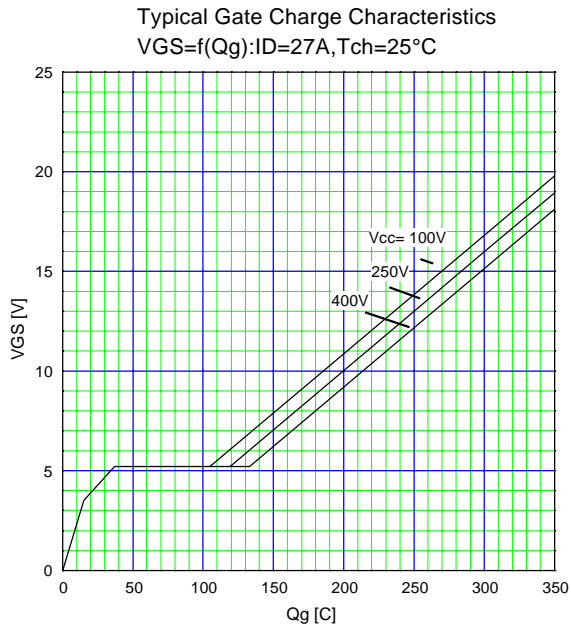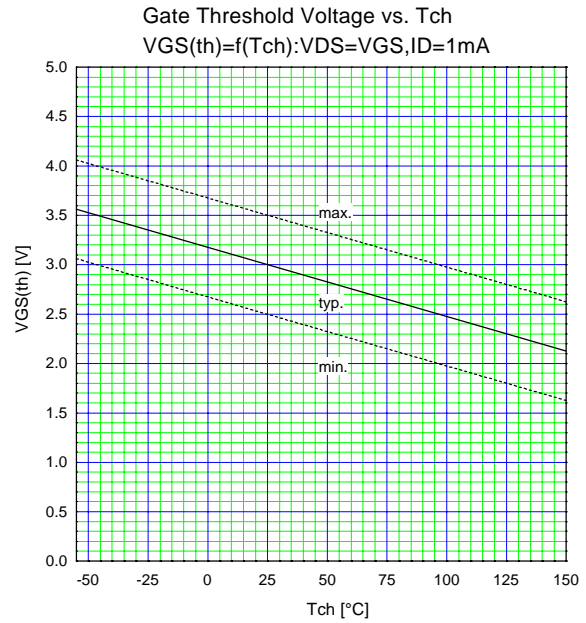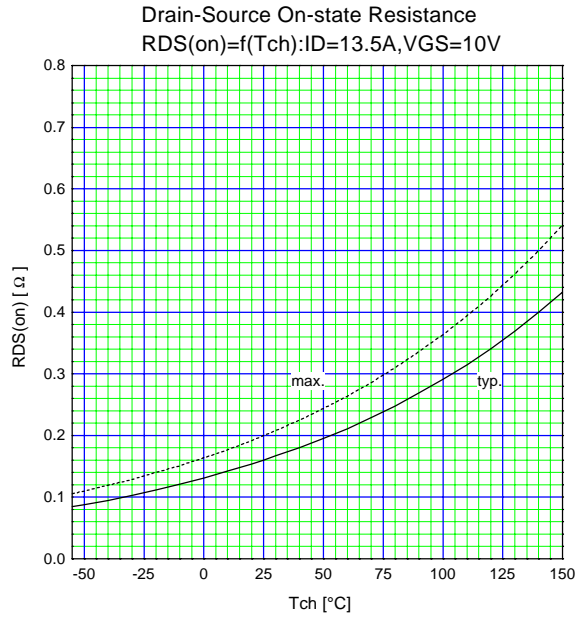

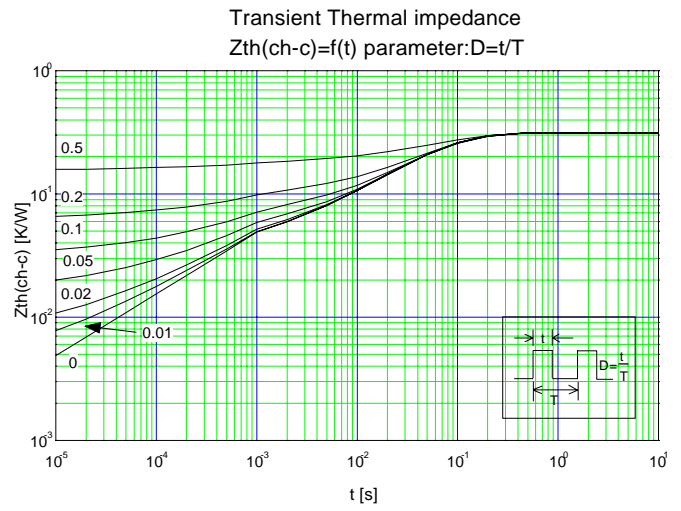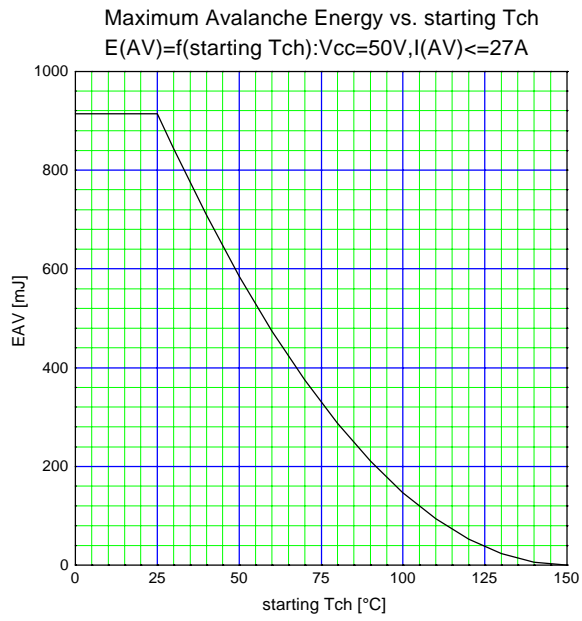



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.