

DESCRIPTION The 2SA1544 is designed for uses of high-resolution monitor TV applications. This makes it possible to raise the video band of high-resolution monitor TVs to 50 MHz.

- FEATURES**
- High f_T : $f_T = 300$ MHz TYP. (@ $V_{CE} = -30$ V, $I_E = 30$ mA)
 - Low C_{ob} : $C_{ob} = 3.3$ pF (@ $V_{CB} = -30$ V)
 - High Voltage: $V_{CBO} = V_{CEO} = -250$ V
 - High Total Power Dissipation: $P_T = 0.75$ W
 - Complementary to 2SC3999

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures

Storage Temperature -55 to $+150$ °C

Junction Temperature 150 °C Maximum

Maximum Power Dissipation ($T_a = 25$ °C)

Total Power Dissipation 750 mW

Maximum Voltages and Current ($T_a = 25$ °C)

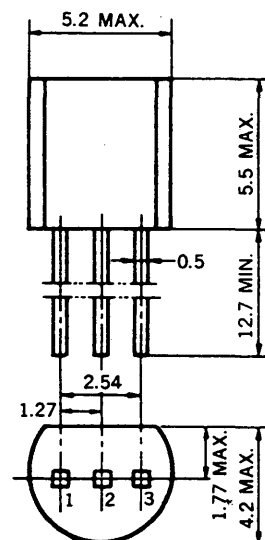
V_{CBO} Collector to Base Voltage -250 V

V_{CEO} Collector to Emitter Voltage -250 V

V_{EBO} Emitter to Base Voltage -5.0 V

I_C Collector Current -100 mA

PACKAGE DIMENSIONS in millimeters



1. Emitter EIAJ : SC-43B
2. Collector JEDEC : TO-92
3. Base IEC : PA33

ELECTRICAL CHARACTERISTICS ($T_a = 25$ °C)

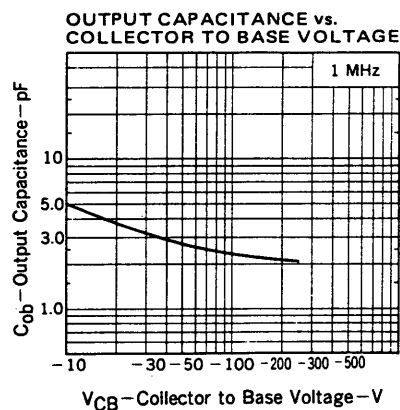
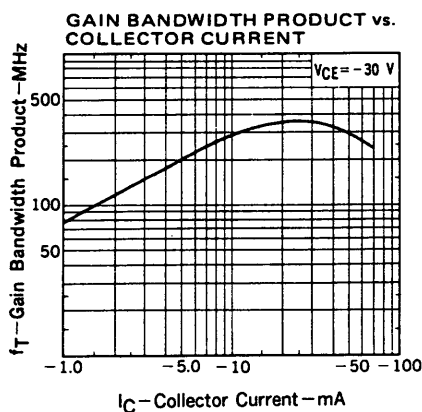
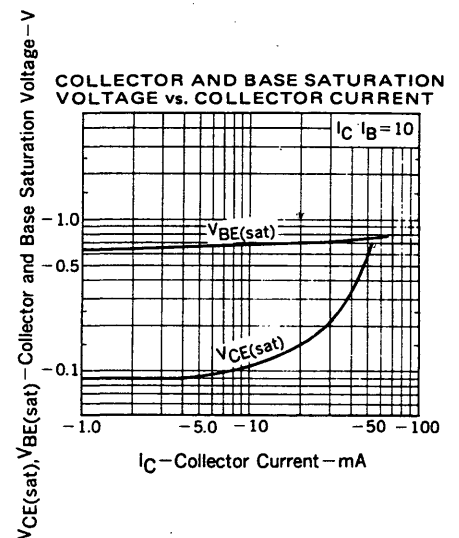
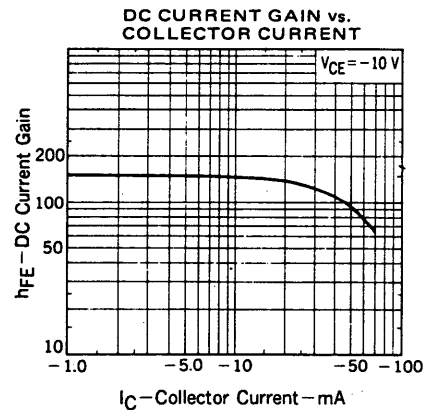
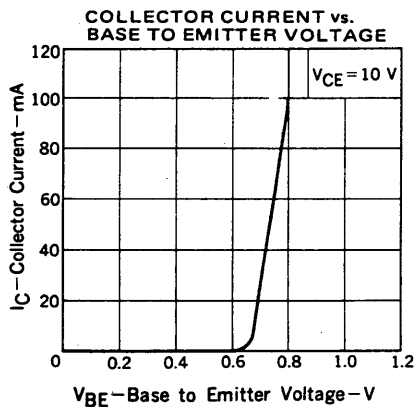
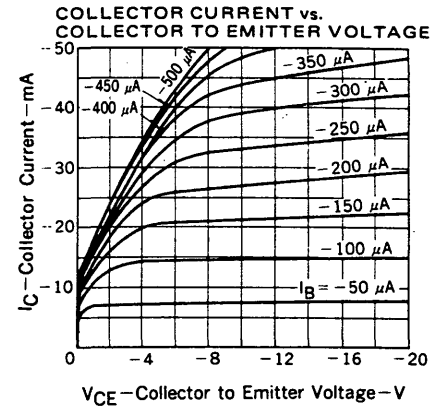
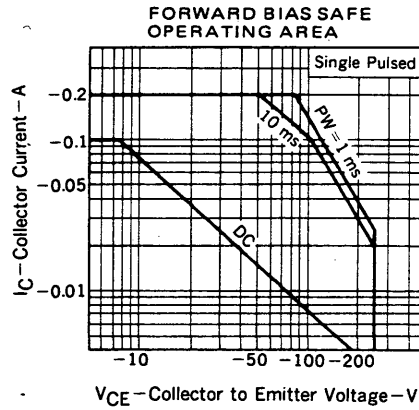
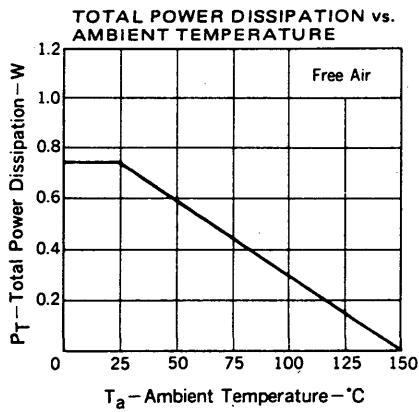
SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
h_{FE}	DC Current Gain	60	150	320	—	$V_{CE} = -10$ V, $I_C = -10$ mA
f_T	Gain Bandwidth Product	200	300		MHz	$V_{CE} = -30$ V, $I_E = 30$ mA
C_{ob}	Output Capacitance		3.3	3.7	pF	$V_{CB} = -30$ V, $I_E = 0$, $f = 1$ MHz
I_{CBO}	Collector Cutoff Current			-100	nA	$V_{CB} = -200$ V, $I_E = 0$
I_{EBO}	Emitter Cutoff Current			-100	nA	$V_{EB} = -3.0$ V, $I_C = 0$
$V_{CE(sat)}$	Collector Saturation Voltage		-0.12	-0.3	V	$I_C = -10$ mA, $I_B = -1.0$ mA
$V_{BE(sat)}$	Base Saturation Voltage		-0.73	-1.2	V	$I_C = -10$ mA, $I_B = -1.0$ mA
V_{ESDR}	Electrostatic Discharge-Resistant		800		V	$C = 1000$ pF, E-B Reverse Bias

* Pulsed PW < 350 μ s, Duty Cycle < 2 %

Classification of h_{FE}

Rank	M	L	K
Range	60 to 120	100 to 200	160 to 320

Test Conditions: $V_{CE} = -10$ V, $I_C = -10$ mA

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.