

NPN HIGH POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/622

Devices

2N7368

Qualified Level

**JAN
JANTX
JANTXV**


MAXIMUM RATINGS

Ratings	Symbol	Value	Units
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Base Voltage	V_{CBO}	80	Vdc
Emitter-Base Voltage	V_{EBO}	7.0	Vdc
Base Current	I_B	4.0	Adc
Collector Current	I_C	10	Adc
Total Power Dissipation @ $T_C = 25^{\circ}C$ ⁽¹⁾	P_T	115	W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	$^{\circ}C$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.5	$^{\circ}C/W$

1) Derate linearly 0.657 W/ $^{\circ}C$ for $T_C > 25^{\circ}C$

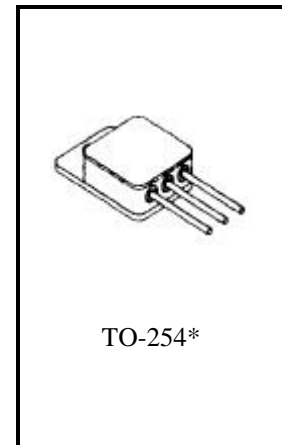

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 0.2$ Adc	$V_{CEO(sus)}$	80		Vdc
Collector-Emitter Cutoff Current $V_{CE} = 70$ Vdc	I_{CES}		1.0	mAdc
Collector-Emitter Cutoff Current $V_{CE} = 80$ Vdc, $V_{BE} = 1.5$ Vdc	I_{CEX}		1.0	mAdc
Emitter-Base Cutoff Current $V_{EB} = 7.0$ Vdc	I_{EBO}		1.0	mAdc

2N7368 JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

ON CHARACTERISTICS ⁽²⁾

Forward-Current Transfer Ratio $I_C = 1.0 \text{ Adc}, V_{CE} = 2.0 \text{ Vdc}$ $I_C = 3.0 \text{ Adc}, V_{CE} = 2.0 \text{ Vdc}$	h_{FE}	50 30	175 140	
Collector-Emitter Saturation Voltage $I_C = 5.0 \text{ Adc}, I_B = 0.5 \text{ Adc}$	$V_{CE(sat)}$		1.0	Vdc
Base-Emitter Saturation Voltage $I_C = 5.0 \text{ Adc}, I_B = 0.5 \text{ Adc}$	$V_{BE(sat)}$		1.5	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 0.5 \text{ Adc}, V_{CE} = 10 \text{ Vdc}, f = 1.0 \text{ MHz}$	$ h_{fe} $	4.0	20	
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		500	pF

SAFE OPERATING AREA

<p>DC Tests $T_C = +25^{\circ}\text{C}, 1 \text{ Cycle}, t \geq 1.0 \text{ s}$ Test 1 $V_{CE} = 11.5 \text{ Vdc}, I_C = 10 \text{ Adc}$ Test 2 $V_{CE} = 45 \text{ Vdc}, I_C = 2.5 \text{ Adc}$ Test 3 $V_{CE} = 60 \text{ Vdc}, I_C = 0.9 \text{ Adc}$</p>
--

(2) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.