

FEATURES


- ❑ Lower $R_{DS(on)}$
- ❑ Improved Inductive Ruggedness
- ❑ Fast Switching Times
- ❑ Lower Input Capacitance
- ❑ Extended Safe Operating Area
- ❑ Improved High Temperature Reliability

$$BV_{DSS} = 60 \text{ V}$$

$$R_{DS(on)} = 5.0 \Omega$$

$$I_D = 200 \text{ mA}$$

SOT-23



1.Gate 2. Source 3. Drain

Product Summary

Part Number	BV_{DSS}	$R_{DS(on)}$	I_D
2N7002	60V	5.0Ω	115mA

Absolute Maximum Ratings

Symbol	Characteristic	Value	Units
V_{DSS}	Drain-to-Source Voltage	60	V
I_D	Continuous Drain Current ($T_C=25^\circ\text{C}$)	115	mA
	Continuous Drain Current ($T_C=100^\circ\text{C}$)	73	
I_{DM}	Drain Current-Pulsed ^①	800	mA
V_{GS}	Gate-to-Source Voltage	± 20	V
P_D	Total Power Dissipation ($T_C=25^\circ\text{C}$)	0.2	W
	Linear Derating Factor	0.16	W/ $^\circ\text{C}$
T_J, T_{STG}	Operating Junction and Storage Temperature Range	- 55 to +150	$^\circ\text{C}$

Thermal Resistance

Symbol	Characteristic	Typ.	Max.	Units
$R_{\theta JA}$	Junction-to-Ambient	--	62.5	$^\circ\text{C/W}$

2N7002MTF

N-CHANNEL Small Signal MOSFET

Electrical Characteristics (T_C=25 °C unless otherwise specified)

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
BV _{DSS}	Drain-Source Breakdown Voltage	60	-	-	V	V _{GS} = 0V, I _D = 250μA
V _{GS(th)}	Gate Threshold Voltage	1.0	-	2.5	V	V _{DS} = V _{GS} , I _D = 250μA
I _{GSS}	Gate-Source Leakage, Forward	-	-	100	nA	V _{GS} = 20V
	Gate-Source Leakage, Reverse	-	-	-100		V _{GS} = -20V
I _{DSS}	Drain-to-Source Leakage Current	-	-	1.0	μA	V _{GS} = 40V
		-	-	500		V _{GS} = 40V, T _C = 125 °C
I _{D(ON)}	On-State Drain-Source Current	0.5	-	-	A	V _{DS} = 10V, V _{GS} = 10V
R _{DS(on)}	Static Drain-Source On-State Resistance ②	-	-	5.0	Ω	V _{GS} = 10V, I _D = 0.5A
g _{fs}	Forward Transconductance ②	0.08	-	-	S	V _{DS} = 15V, I _D = 0.2A
C _{iss}	Input Capacitance	-	-	50	pF	V _{DS} = 25V, V _{GS} = 0V, f = 1.0MHz
C _{oss}	Output Capacitance	-	-	25		
C _{rss}	Reverse Transfer Capacitance	-	-	5		
t _{d(on)}	Turn-On Delay Time	-	-	20	ns	V _{DD} = 30V, I _D = 0.2A R _G = 25Ω ② ③
t _r	Rise Time	-	-	-		
t _{d(off)}	Turn-Off Delay Time	-	-	20		
t _f	Fall Time	-	-	-		

Source-Drain Diode Ratings and Characteristics

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
I _S	Continuous Source Current	-	-	115	mA	Integral reverse pn-diode in the MOSFET
I _{SD}	Pulse Source Current ①	-	-	800	mA	
V _{SD}	Diode Forward Voltage ②	-	-	1.5	V	T _A = 25 °C, I _S = 115mA V _{GS} = 0V

Notes ;

- ① Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- ② Pulse Test : Pulse Width = 250μs, Duty Cycle ≤ 2%
- ③ Essentially Independent of Operating Temperature

Fig 1. Output Characteristics

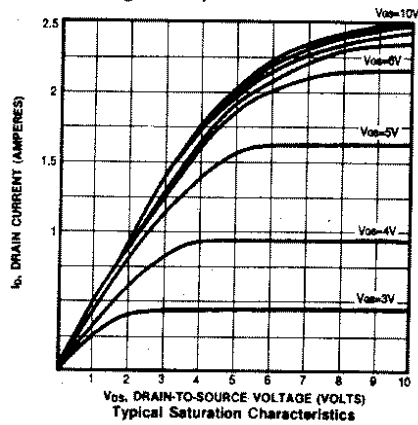


Fig 2. Transfer Characteristics

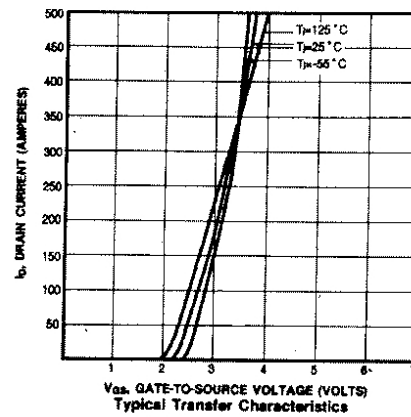


Fig 3. On-Resistance vs. Drain Current

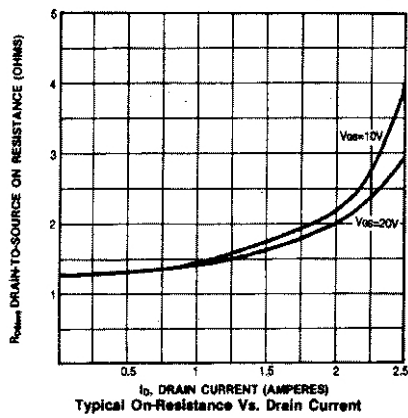


Fig 4. Source-Drain Diode Forward Voltage

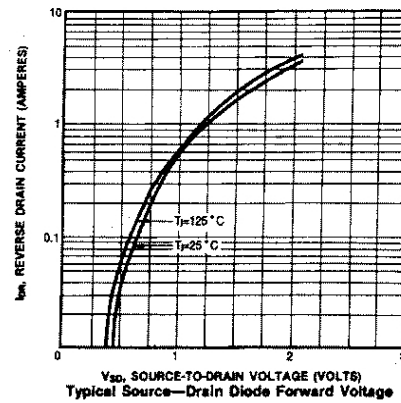


Fig 5. Capacitance vs. Drain-Source Voltage

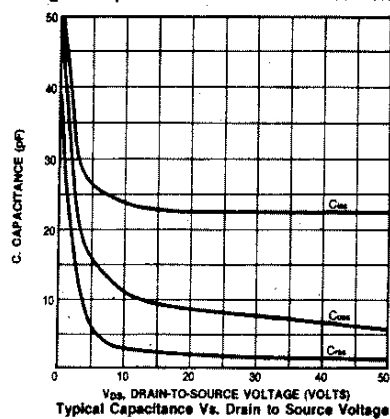


Fig 6. Breakdown Voltage vs. Temperature


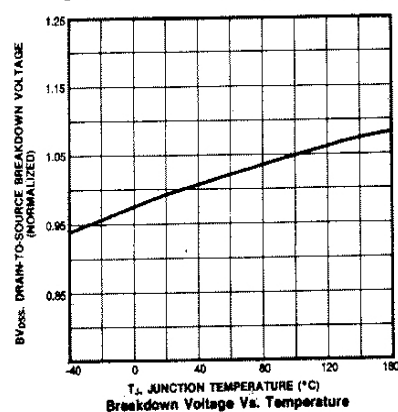


Fig 7. On-Resistance vs. Temperature



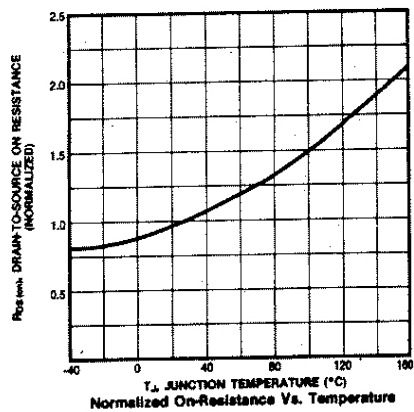

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.