

NPN SILICON SWITCHING TRANSISTOR

Qualified per MIL-PRF-19500/317

Devices

2N2369A	2N4449
2N2369AU	2N4449U
2N2369AUA	2N4449UA
2N2369AUB	2N4449UB

Qualified Level

JAN
JANTX
JANTXV

MAXIMUM RATINGS


Ratings	Symbol	All UB	All others	Unit	
Collector-Emitter Voltage	V_{CEO}	20	15	Vdc	
Emitter-Base Voltage	V_{EBO}	6.0	4.5	Vdc	
Collector-Base Voltage	V_{CBO}	40		Vdc	
Collector-Emitter Voltage	V_{CES}	40		Vdc	
		@ $T_A = +25^{\circ}C$	@ $T_C = +25^{\circ}C$		
Total Power Dissipation	P_T	2N2369A; 2N4449	0.50 ⁽¹⁾	1.2 ⁽²⁾	W
		All UA	0.50 ⁽⁵⁾	1.2 ⁽²⁾	W
		All UB	0.40 ⁽⁶⁾	1.4 ⁽⁷⁾	
		All U	0.60 ⁽³⁾	1.5 ⁽⁴⁾	
Operating & Storage Junction Temperature Range	T_{op}, T_{stg}	-65 to +200		$^{\circ}C$	

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit	
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	2N2369A; 2N4449	146	$^{\circ}C/mW$
		All UA	125	
		All UB	135	
		All U	117	
Thermal Resistance, Ambient-to-Case	$R_{\theta JA}$	2N2369A; 2N4449	325	$^{\circ}C/mW$
		All UA	350	
		All UB	437	
		All U	291	

- 1) Derate linearly 3.08 mW/ $^{\circ}C$ above $T_A = +37.5^{\circ}C$
 2) Derate linearly 6.85 mW/ $^{\circ}C$ above $T_C = +25^{\circ}C$
 3) Derate linearly 3.44 mW/ $^{\circ}C$ above $T_A = +63.5^{\circ}C$
 4) Derate linearly 8.55 mW/ $^{\circ}C$ above $T_C = +63.5^{\circ}C$

- 5) Derate linearly 2.86 mW/ $^{\circ}C$ above $T_C = +63.5^{\circ}C$
 6) Derate linearly 2.29 mW/ $^{\circ}C$ above $T_C = +63.5^{\circ}C$
 7) Derate linearly 8.00 mW/ $^{\circ}C$ above $T_C = +63.5^{\circ}C$

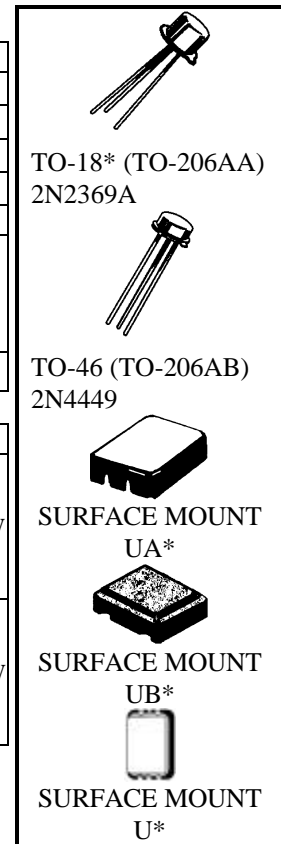

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage $I_C = 10 \text{ mA dc}$	$V_{(BR)CEO}$	15		Vdc
Collector-Emitter Cutoff Current $V_{CE} = 20 \text{ Vdc}$	I_{CES}		0.4	$\mu\text{A dc}$
Emitter-Base Breakdown Voltage $V_{EB} = 4.5 \text{ Vdc}$	I_{EBO}		10	$\mu\text{A dc}$
Emitter-Base Cutoff Current $V_{EB} = 4.0 \text{ Vdc}$			0.25	
Collector-Base Breakdown Voltage $V_{CB} = 40 \text{ Vdc}$	I_{CBO}		10	$\mu\text{A dc}$
Collector-Base Cutoff Current $V_{CB} = 32 \text{ Vdc}$			0.2	

ON CHARACTERISTICS (1)

Forward-Current Transfer Ratio $I_C = 10 \text{ mA dc}, V_{CE} = 0.35 \text{ Vdc}$ $I_C = 30 \text{ mA dc}, V_{CE} = 0.4 \text{ Vdc}$ $I_C = 10 \text{ mA dc}, V_{CE} = 1.0 \text{ Vdc}$ $I_C = 100 \text{ mA dc}, V_{CE} = 1.0 \text{ Vdc}$	h_{FE}	40 30 40 20	120 120 120 120	
Collector-Emitter Saturation Voltage $I_C = 10 \text{ mA dc}, I_B = 1.0 \text{ mA dc}$ $I_C = 30 \text{ mA dc}, I_B = 3.0 \text{ mA dc}$ $I_C = 100 \text{ mA dc}, I_B = 10 \text{ mA dc}$	$V_{CE(sat)}$		0.20 0.25 0.45	Vdc
Base-Emitter Saturation Voltage $I_C = 10 \text{ mA dc}, I_B = 1.0 \text{ mA dc}$ $I_C = 30 \text{ mA dc}, I_B = 3.0 \text{ mA dc}$ $I_C = 100 \text{ mA dc}, I_B = 10 \text{ mA dc}$	$V_{BE(sat)}$	0.70 0.80	0.85 0.90 1.20	Vdc

DYNAMIC CHARACTERISTICS

Forward Current Transfer Ratio $I_C = 10 \text{ mA dc}, V_{CE} = 10 \text{ Vdc}, f = 100 \text{ MHz}$	$ h_{fe} $	5.0	10	
Output Capacitance $V_{CB} = 5.0 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		4.0	pF
Input Capacitance $V_{EB} = 0.5 \text{ Vdc}, I_C = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{ibo}		5.0	pF

(1)Pulse Test: Pulse Width = 300 μs , Duty Cycle \leq 2.0%.

SWITCHING CHARACTERISTICS

Turn-On Time $I_C = 10 \text{ mA dc}; I_{B1} = 3.0 \text{ mA dc}, I_{B2} = 1.5 \text{ mA dc}$	t_{on}		12	ηs
Turn-Off Time $I_C = 10 \text{ mA dc}; I_{B1} = 3.0 \text{ mA dc}, I_{B2} = 1.5 \text{ mA dc}$	t_{off}		18	ηs
Charge Storage Time $I_C = 10 \text{ mA dc}; I_{B1} = 10 \text{ mA dc}, I_{B2} = 10 \text{ mA dc}$	t_s		13	ηs



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.