

NOT RECOMMENDED FOR NEW DESIGNS

MOTOROLA SC (DIODES/OPTO) 25E D ■ 6367255 0080897 T ■ T-25-15

Silicon Controlled Rectifiers Reverse Blocking Triode Thyristors

... designed for industrial applications such as motor controls, heater controls, and power supplies, wherever half-wave or dc silicon gate controlled devices are needed.

- Glass Passivated Junctions for Maximum Reliability
- Center Gate Geometry for Parameter Uniformity
- High Surge Current, $I_{TSM} = 260$ A, for Crowbar Service

**2N2574
thru
2N2578
MCR649AP
1 thru 10**

SCRs
20 and 25 AMPERES RMS
25 thru 800 VOLTS



CASE 61-04
STYLE 1
2N2573 thru 2N2579



CASE 54-05
STYLE 2
MCR649AP1 thru
MCR649AP10

MAXIMUM RATINGS ($T_J = 125^\circ\text{C}$ unless otherwise noted.)

Rating	Symbol	Value	Unit
Peak Repetitive Forward and Reverse Blocking Voltage, Note 1 MCR649AP1 2N2574, MCR649AP2 2N2575, MCR649AP3 2N2576, MCR649AP4 2N2578, MCR649AP6 MCR649AP8 MCR649AP9 MCR649AP10	V _{DRM} or V _{RRM}	25 50 100 200 400 600 700 800	Volts
On-State Current 2N Series MCR Series	I _{T(RMS)}	25 20	Amps
Circuit Fusing (t = 8.3 ms)	I ² t	280 235	A ² s
Peak Surge Current (Half Cycle, 60 Hz, $T_J = -65^\circ$ to $+125^\circ\text{C}$)	I _{TSM}	260 235	Amps
Peak Gate Power — Forward	P _{GM}	5	Watts
Average Gate Power — Forward	P _{G(AVG)}	0.5	Watt
Peak Gate Current — Forward	I _{GM}	2	Amps
Peak Gate Voltage — Forward Reverse	V _{GFM} V _{GRM}	10 5	Volts
Operating Junction Temperature	T _J	-65 to +125	°C
Storage Temperature	T _{stg}	-65 to +150	°C
Thermal Resistance, Junction to Case	R _{θJC}	1.5	°C/W

Note 1. V_{DRM} and V_{RRM} for all types can be applied on a continuous basis without incurring damage. Ratings apply for zero or negative gate voltage.

3

T-25-15

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak Forward or Reverse Blocking Current (Rated V _{DRM} or V _{RRM} , gate open) T _J = 25°C T _J = 125°C	I _{DRM} , I _{RRM}	—	—	10 5	μA mA
Gate Trigger Current (Continuous dc) (V _D = 7 Vdc, R _L = 100 Ω)	I _{GT}	—	—	40	mA
Gate Trigger Voltage (Continuous dc) (V _D = 7 Vdc, R _L = 100 Ω) (V _D = Rated V _{DRM} , R _L = 100 Ω, T _J = 125°C)	V _{GT}	— 0.3	0.7	3.5	Volts
Forward On Voltage (I _{TM} = 20 Adc)	V _{TM}	—	1.1	1.4	Volts
Holding Current (V _D = 7 Vdc, Gate Open)	I _H	—	10	—	mA
Turn-On Time (t _d + t _r) (I _{GT} = 50 mA, I _T = 10 A, V _D = Rated V _{DRM})	t _{gt}	—	1	—	μs
Turn-Off Time (I _T = 10 A, I _R = 10 A, dv/dt = 20 V/μs, T _J = 125°C) (V _D = Rated Voltage V _{DRM})	t _q	—	30	—	μs
Forward Voltage Application Rate (Exponential) (Gate Open, T _J = 125°C, V _D = Rated V _{DRM})	dv/dt	—	30	—	V/μs

FIGURE 1 — CURRENT DERATING


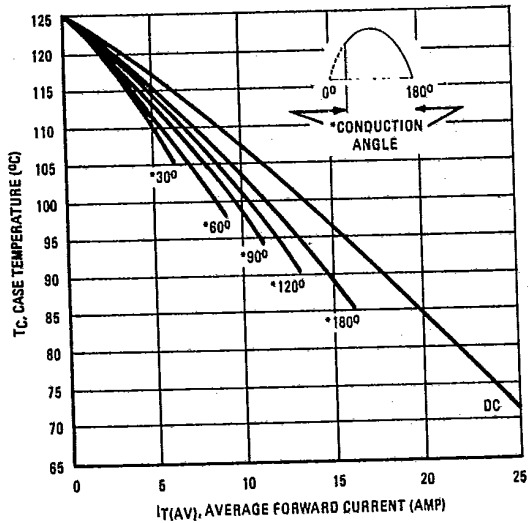


FIGURE 2 — GATE TRIGGER CHARACTERISTICS

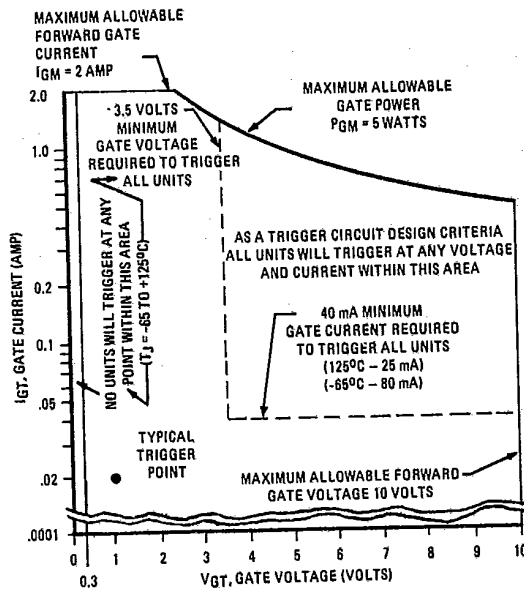

3

T-25-15

FIGURE 3 - ON-STATE CHARACTERISTICS

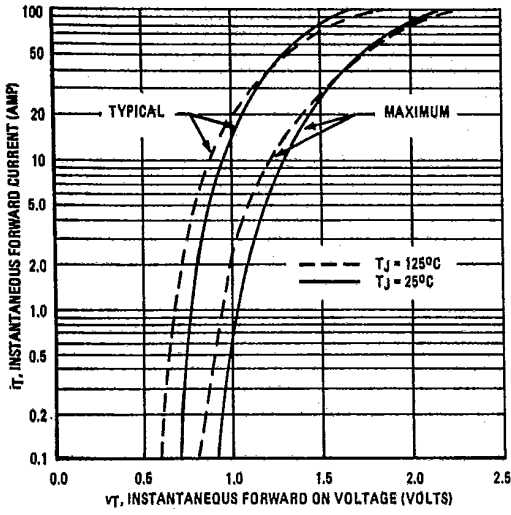


FIGURE 4 - MAXIMUM ALLOWABLE NON-RECURRENT SURGE CURRENT

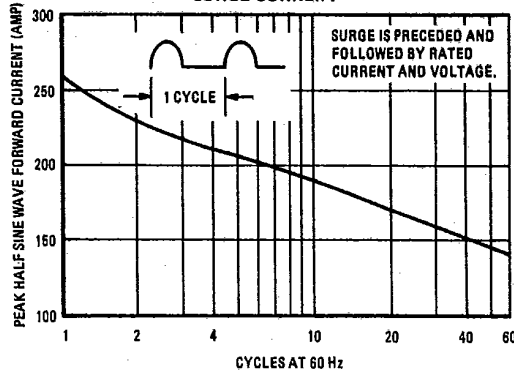


FIGURE 6 - EFFECT OF TEMPERATURE ON TYPICAL GATE CURRENT

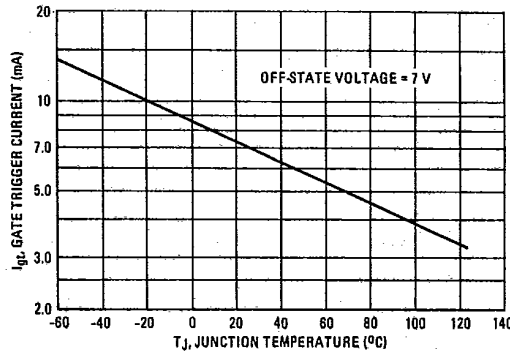


FIGURE 5 - EFFECT OF TEMPERATURE ON TYPICAL HOLDING CURRENT

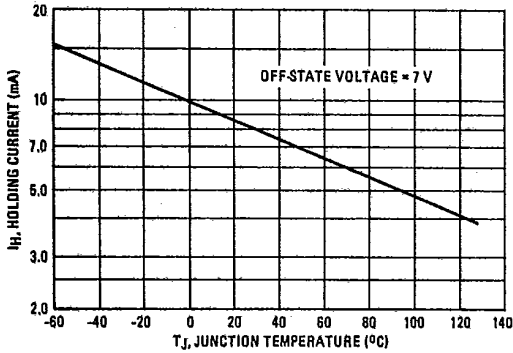


FIGURE 8 - MAXIMUM TRANSIENT THERMAL RESISTANCE JUNCTION TO CASE


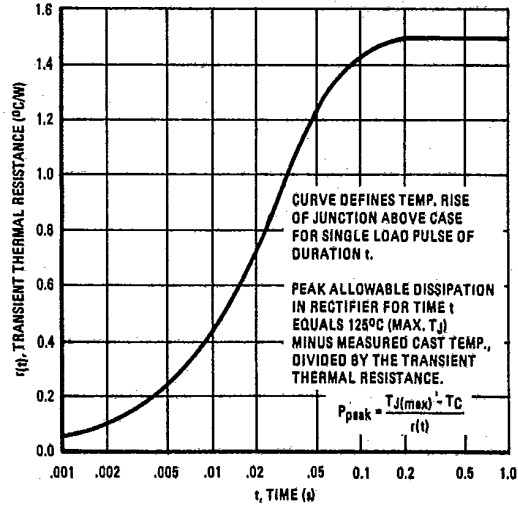


FIGURE 7 - EFFECT OF TEMPERATURE ON TYPICAL GATE VOLTAGE



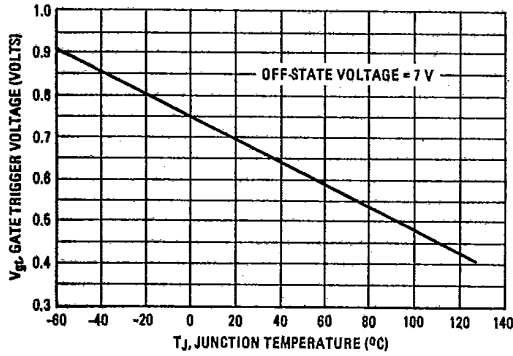

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.