


No.1155A



STK430III

Thick Film Hybrid Integrated Circuit
22W MIN DUAL-CHANNEL AF POWER AMP.

The STK430III, a power-increased version of the STK430II, is a single-package hybrid IC of our own original IMST structure. It is a dual-channel, high-efficiency amp. that has little voltage loss and is designed to operate from three supplies. Application areas include outdoor stereos, radio cassettes, and the like.

Applications

- . Radio cassette
- . Car stereo for diesel-engine car
- . Outdoor stereo (3-supply operation)
- . Color TV (with sound multiplex system)
- . Electronic musical instrument

Features

- . Wide supply voltage range
- . Supply voltage range $V_{CC}=8$ to $31V$.
Operable from battery ($13.2V$), AC line ($31.0V$)
- . High V_{CCmax} . enabling easy designing of transformer ($V_{CCmax}=50V$)
- . New circuit configuration permitting high power output
 $V_{CC} \ 13.2V : 5.5W \text{ typ. } \times 2 \text{ (THD=10\%)}$
 $31.0V : 25W \text{ typ. } \times 2 \text{ (THD=10\%)}$
 $31.0V : 20W \text{ typ. } \times 2 \text{ (THD=1\%)}$
- . Free from failure caused by load shorted because heat sink is provided
- . Usable for $2ohm$ load (at $V_{CC}=22V$ or less)
- . Easy to use in LM-band AM sets because electromagnetic interference in radio band is small

Maximum Ratings at $T_a=25^\circ C$


Maximum Supply Voltage	V_{CCmax}	50	unit
Operating Case Temperature	T_C	-20 to +105	$^\circ C$
Storage Temperature	T_{stg}	-20 to +125	$^\circ C$
Available Time for Load Shorted	t_s	2	sec
$V_{CC}=31V, *R_L=4ohm, f=1kHz, P_O=22W, V_G=40dB$			

Recommended Operating Conditions at $T_a=25^\circ C$

Recommended Supply Voltage	V_{CC}	31	unit
Load Resistance	R_L	4	ohm

Information furnished by SANYO is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use, and no license is granted by implication or otherwise under any patent or patent rights of SANYO.

Case Outline 4031
(unit:mm)

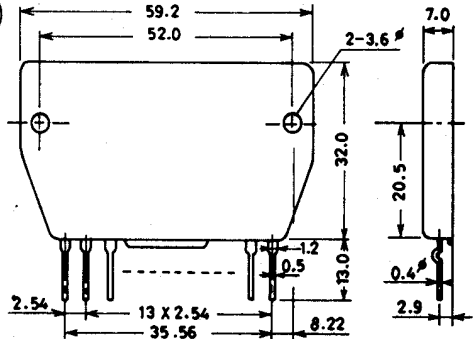

These specifications are subject to change without notice.

Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{CC}=31\text{V}$, $R_L=4\text{ohm}$, $R_g=600\text{ohm}$, $V_G=40\text{dB}$


			min	typ	max	unit
Quiescent Current	I_{CCO}	$V_{CC}=36\text{V}$		60	120	mA
Output Power	$P_{O(1)}$	$V_{CC}=13.2\text{V}$, THD=10%, $f=1\text{kHz}$	5.0	5.5		W
	$P_{O(2)}$	THD=10%, $f=1\text{kHz}$	22	25		W
	$P_{O(3)}$	THD=1.0%, $f=70\text{Hz}$ to 15kHz		20		W
Total Harmonic Distortion	THD(1)	$V_{CC}=9\text{V}$, $P_O=1.0\text{W}$, $f=1\text{kHz}$		0.5	0.8	%
	THD(2)	$P_O=1.0\text{W}$, $f=1\text{kHz}$		0.07		%
Frequency Characteristic	f_L, f_H	$V_{CC}=26.4\text{V}$, $P_O=1.0\text{W}$, $+0\text{dB}$, -3dB	40 to 50k			Hz
Input Resistance	r_i	$V_{CC}=26.4\text{V}$, $P_O=1.0\text{W}$		21k		ohm
Output Noise Voltage	V_{NO}	$V_{CC}=36\text{V}$			0.8	mVrms

(Note) . For power supply at the time of test, use a constant-voltage power supply unless otherwise specified.

. *: For measurement of available time for load shorted and output noise voltage, use the specified transformer power supply shown right.


. Output noise voltage is the peak value on rms scale (VTVM) of average value indicating type. For AC power supply, use an AC stabilized power supply (50Hz) to eliminate the effect of flicker noise in AC primary line.

. For using $R_L=2\text{ohm}$, supply voltage at rated output must not exceed 22V.



Specified transformer power supply (equivalent to Sansui RP-22)

Equivalent Circuit

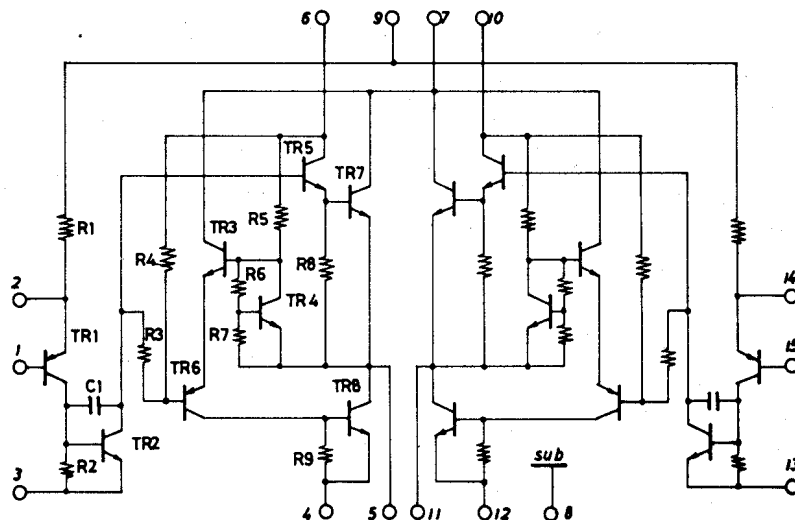

Test Circuit

