



**Microsemi Corp.**  
The diode experts

SCOTTSDALE, AZ

For more information call:  
(602) 941-6300

**1N821, A, -1  
thru  
1N829, A, -1  
DO-35**

## FEATURES

- ZENER VOLTAGE 6.2V AND 6.55V
- 1N821, 823, 825, 827 AND 829 HAVE JAN, JANTX, JANTXV-1 QUALIFICATIONS TO MIL-S-19500/159
- JANS EQUIVALENT AVAILABLE VIA SCD
- ALSO AVAILABLE IN DO-7 PACKAGE

## MAXIMUM RATINGS

Operating Temperatures: -65°C to +175°C

Storage Temperatures: -65°C to +175°C

DC Power Dissipation: 475 mW @ 25°C

Derating: 3.16 mW/°C above 25°C

## \*ELECTRICAL CHARACTERISTICS

@ 25°C, unless otherwise specified

JEDEC TYPE NUMBER	ZENER VOLTAGE (Note 1 and 4) $V_Z @ I_{ZT}$	ZENER TEST CURRENT $I_{ZT}$	MAXIMUM ZENER IMPEDANCE (Note 3 and 4) $Z_{ZT}$	VOLTAGE TEMPERATURE STABILITY ( $\Delta V_{ZT}$ MAX) -55° to +100° (Note 3 and 4)	EFFECTIVE TEMPERATURE COEFFICIENT $\alpha_{VZ}$
	VOLTS	mA	OHMS	mV	%/°C
1N821	5.9 - 6.5	7.5	15	96	0.01
1N821A	5.9 - 6.5	7.5	10	96	0.01
1N822†	5.9 - 6.5	7.5	15	96	0.01
1N823	5.9 - 6.5	7.5	15	48	0.005
1N823A	5.9 - 6.5	7.5	10	48	0.005
1N824†	5.9 - 6.5	7.5	15	48	0.005
1N825	5.9 - 6.5	7.5	15	19	0.002
1N825A	5.9 - 6.5	7.5	10	19	0.002
1N826	6.2 - 6.9	7.5	15	20	0.002
1N827	5.9 - 6.5	7.5	15	9	0.001
1N827A	5.9 - 6.5	7.5	10	9	0.001
1N828	6.2 - 6.9	7.5	15	10	0.001
1N829	5.9 - 6.5	7.5	15	5	0.0005
1N829A	5.9 - 6.5	7.5	10	5	0.0005

† Double Anode; Electrical Specifications Apply Under Both Bias Polarities.

‡ JEDEC Registered Data

**NOTE 1** When ordering devices with tighter tolerances than specified, use a nominal  $V_Z$  voltage of 6.2 V.

**NOTE 2** Measured by superimposing 0.75 mA ac rms on 7.5 mA DC @ 25°C.

**NOTE 3** The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV change at any discrete temperature between the established limits.

**NOTE 4** Voltage measurements to be performed 15 seconds after application of DC current.

**6.2 & 6.55 VOLT  
TEMPERATURE  
COMPENSATED  
ZENER REFERENCE  
DIODES**

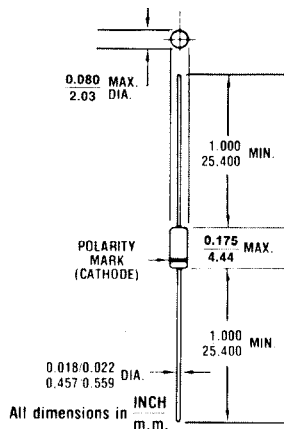


FIGURE 1

## MECHANICAL CHARACTERISTICS

**CASE:** Hermetically sealed glass case. DO-35 (DO-204AH).

**FINISH:** All external surfaces are corrosion resistant and leads solderable.

**THERMAL RESISTANCE:** 250°C/W junction to lead at 0.375-inches from body. Metallurgically bonded DO-35's exhibit less than 100°C/W at zero distance from body.

**POLARITY:** Diode to be operated with the banded end positive with respect to the opposite end.

**WEIGHT:** 0.2 grams.


**MOUNTING POSITION:** Any

# 1N821, A, -1 thru 1N829, A, -1 DO-35


The curve shown in Figure 3 is typical of the diode series and greatly simplifies the estimation of the Temperature Coefficient (TC) when the diode is operated at currents other than 7.5 mA.

**EXAMPLE:** A diode in this series is operated at a current of 7.5mA and has specified Temperature Coefficient (TC) limits of  $\pm 0.005\%/^{\circ}\text{C}$ . To obtain the typical Temperature Coefficient limits for this same diode operated at a current of 6.0mA, the new TC limits ( $\%/^{\circ}\text{C}$ ) can be estimated using the graph in FIGURE 3.


At a test current of 6.0mA the change in Temperature Coefficient (TC) is approximately  $-0.0006\%/^{\circ}\text{C}$ . The algebraic sum of  $\pm 0.005\%/^{\circ}\text{C}$  and  $-0.0006\%/^{\circ}\text{C}$  gives the new estimated limits of  $+0.0044\%/^{\circ}\text{C}$  and  $-0.0056\%/^{\circ}\text{C}$ .

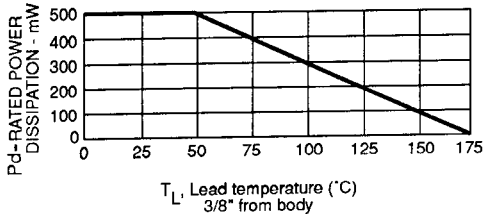

**FIGURE 2** POWER DERATING CURVE

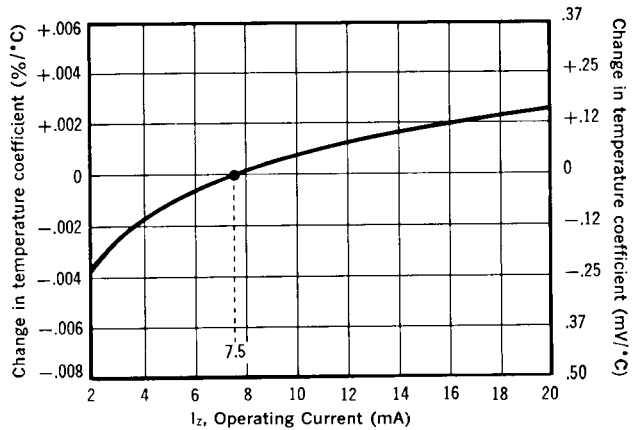

**FIGURE 3**  
TYPICAL CHANGE OF TEMPERATURE COEFFICIENT WITH CHANGE IN OPERATING CURRENT

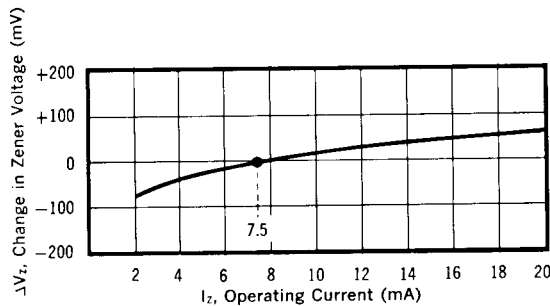

**FIGURE 4**  
TYPICAL CHANGE OF ZENER VOLTAGE WITH CHANGE IN OPERATING CURRENT

This curve in Figure 4 illustrates the change of diode voltage arising from the effect of impedance. It is in effect an exploded view of the zener operating region of the I-V characteristic.

In conjunction with Figure 3, this curve can be used to estimate total voltage regulation under conditions of both varying temperature and current.

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.