

1N6821
(MSASC150H45L)
1N6821R
(MSASC150H45LR)

45 Volts
150 Amps

LOW VOLTAGE
DROP SCHOTTKY
DIODE


Features

- Tungsten/Platinum schottky barrier
- Oxide passivated structure for very low leakage currents
- Guard ring protection for increased reverse energy capability
- Epitaxial structure minimizes forward voltage drop
- Hermetically sealed, low profile ceramic surface mount power package
- Low package inductance
- Very low thermal resistance
- Available as standard polarity (strap-to-anode, 1N6821) and reverse polarity (strap-to-cathode: 1N6821R)

Maximum Ratings @ 25°C (unless otherwise specified)

DESCRIPTION	SYMBOL	MAX.	UNIT
Peak Repetitive Reverse Voltage	V_{RRM}	45	Volts
Working Peak Reverse Voltage	V_{RWM}	45	Volts
DC Blocking Voltage	V_R	45	Volts
Average Rectified Forward Current, $T_c \leq 125^\circ\text{C}$	$I_{F(ave)}$	150	Amps
derating, forward current, $T_c \geq 125^\circ\text{C}$	dI_F/dT	4	Amps/ $^\circ\text{C}$
Nonrepetitive Peak Surge Current, $t_p = 8.3$ ms, half-sinewave	I_{FSM}	750	Amps
Peak Repetitive Reverse Surge Current, $t_p = 1\mu\text{s}$, $f = 1\text{kHz}$	I_{RRM}	2	Amp
Junction Temperature Range	T_j	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$
Thermal Resistance, Junction to Case:			$^\circ\text{C/W}$
	1N6821	0.20	
	1N6821R	0.35	

Mechanical Outline
ThinKey™ 3

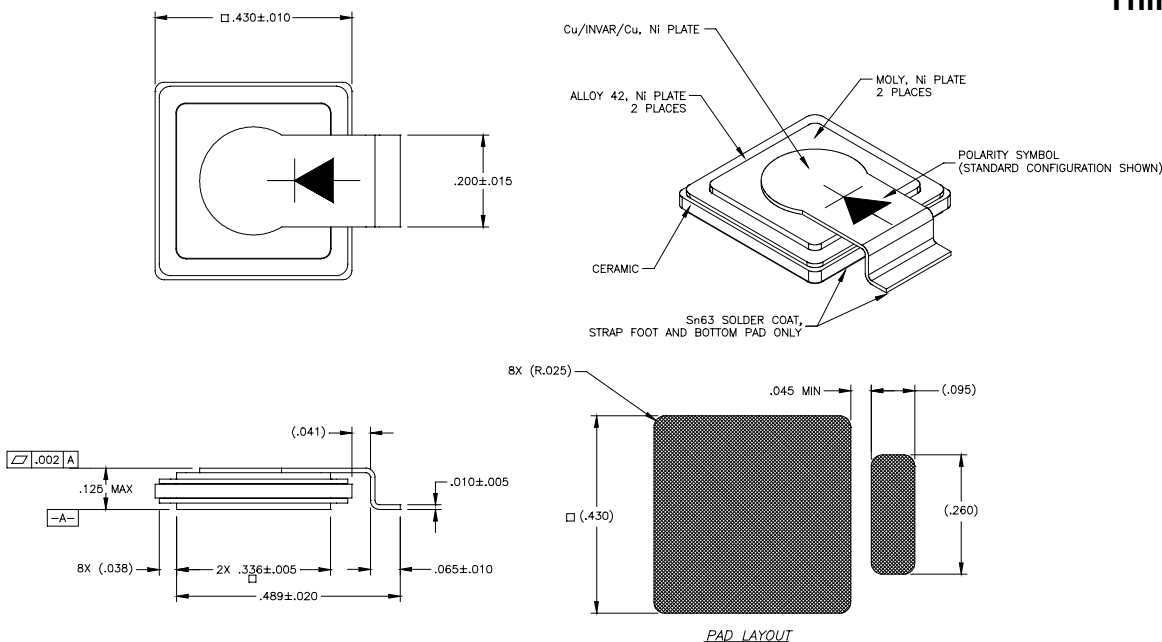


1N6821 (MSASC150H45L) 1N6821R (MSASC150H45LR)

Electrical Parameters


DESCRIPTION	SYMBOL	CONDITIONS	MIN	TYP.	MAX	UNIT
Reverse (Leakage) Current	IR ₂₅	VR= 45 Vdc, Tc= 25°C		1	10	mA
	IR ₁₀₀	VR= 45 Vdc, Tc= 100°C		125	400	mA
	IR ₁₂₅	VR= 45 Vdc, Tc= 125°C		500		mA
Forward Voltage pulse test, pw= 300 μs d/c≤ 2%	VF1	IF= 20A, Tc= 25°C		340	370	mV
	VF2	IF= 50A, Tc= 25°C		410	450	mV
	VF3	IF= 100A, Tc= 25°C		475	530	mV
	VF4	IF= 150A, Tc= 25°C		540	600	mV
	VF5	IF= 200A, Tc= 25°C		600		mV
	VF6	IF= 50A, Tc= -55°C		470	550	mV
	VF7	IF= 50A, Tc= 125°C		315	380	mV
	VF8	IF= 100A, Tc= 125°C		415		mV
	VF9	IF= 150A, Tc= 100°C		515		mV
	VF10	IF= 10 mA, Tc= 25°C		135	-	mV
	VF11	IF= 50 mA, Tc= 25°C		175	-	mV
	VF12	IF= 100 mA, Tc= 25°C		195	-	mV
Junction Capacitance	Cj1	VR= 10 Vdc		4500	4900	pF
	Cj2	VR= 5 Vdc		6400		pF
Breakdown Voltage	BVR	IR= 5 mA, Tc= 25°C		55		V
		IR= 5 mA, Tc= -55°C	45	50		V

Typical VF data, msasc150h45

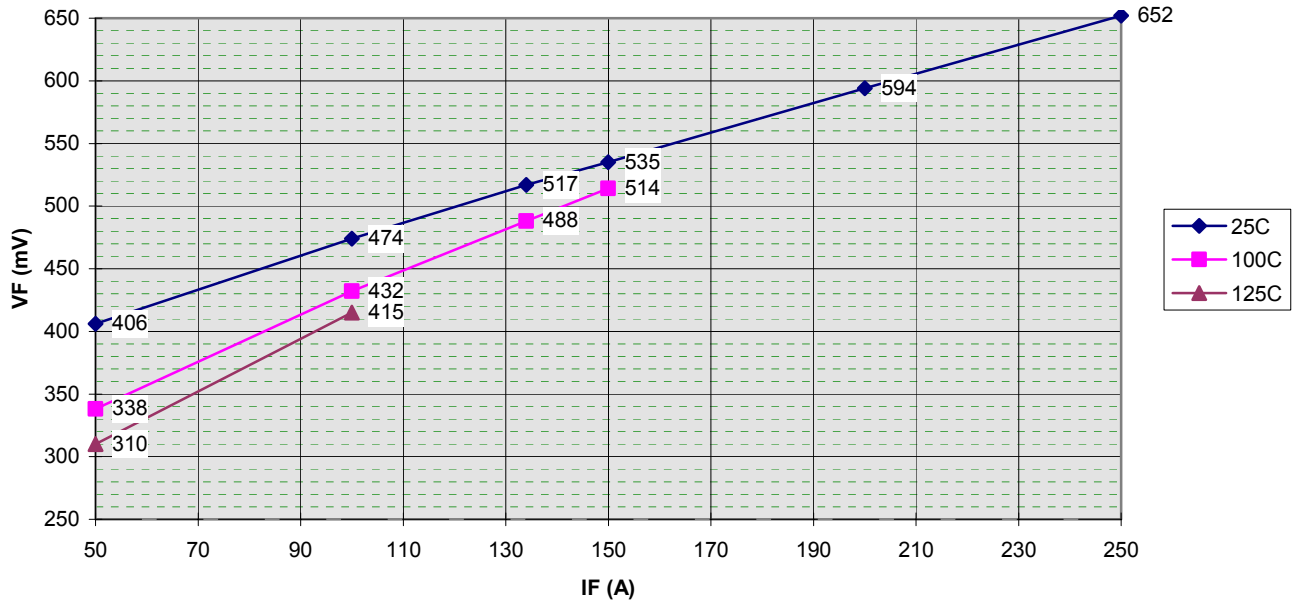

1N6821 (MSASC150H45L)
1N6821R (MSASC150H45LR)

Cj vs VR Typical Curve

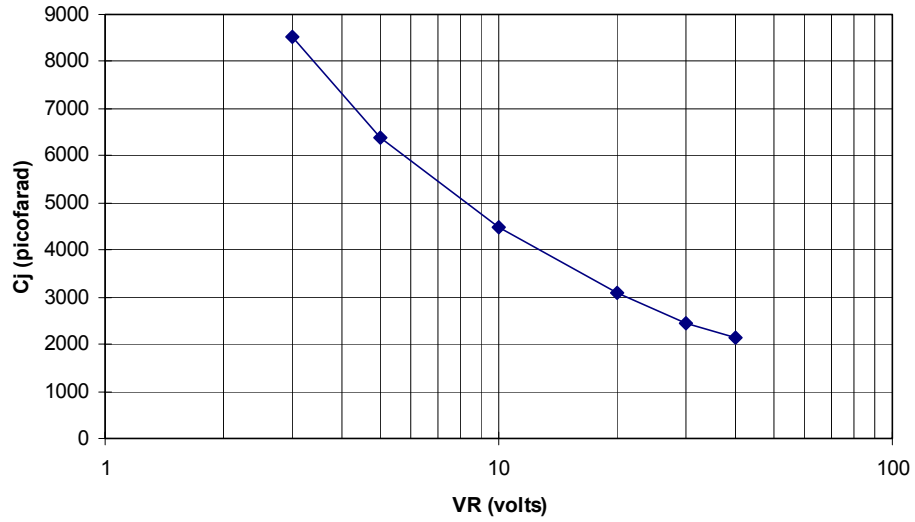



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.