

MSASC100W45H
MSASC100W45HR
 Or
1N6791

45 Volts
100 Amps

SURFACE MOUNT
LOW LEAKAGE
SCHOTTKY DIODE


Features

- Tungsten schottky barrier
- Oxide passivated structure for very low leakage currents
- Guard ring protection for increased reverse energy capability
- Epitaxial structure minimizes forward voltage drop
- Hermetically sealed, low profile ceramic surface mount power package
- Low package inductance
- Very low thermal resistance
- Available as standard polarity (strap-to-anode, MSASC100W45H) and reverse polarity (strap-to-cathode: MSASC100W45HR)

Maximum Ratings @ 25°C (unless otherwise specified)

DESCRIPTION	SYMBOL	MAX.	UNIT
Peak Repetitive Reverse Voltage	V_{RRM}	45	Volts
Working Peak Reverse Voltage	V_{RWM}	45	Volts
DC Blocking Voltage	V_R	45	Volts
Average Rectified Forward Current, $T_c \leq 145^\circ\text{C}$	$I_{F(ave)}$	100	Amps
derating, forward current, $T_c \geq 145^\circ\text{C}$	df/dT	3.3	Amps/ $^\circ\text{C}$
Nonrepetitive Peak Surge Current, $t_p = 8.3$ ms, half-sinewave	I_{FSM}	500	Amps
Peak Repetitive Reverse Surge Current, $t_p = 1\mu\text{s}$, $f = 1$ kHz	I_{RRM}	2	Amp
Junction Temperature Range	T_j	-65 to +175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +175	$^\circ\text{C}$
Thermal Resistance, Junction to Case:	θ_{JC}	MSASC100W45H 0.35 MSASC100W45HR 0.5	$^\circ\text{C/W}$


Mechanical

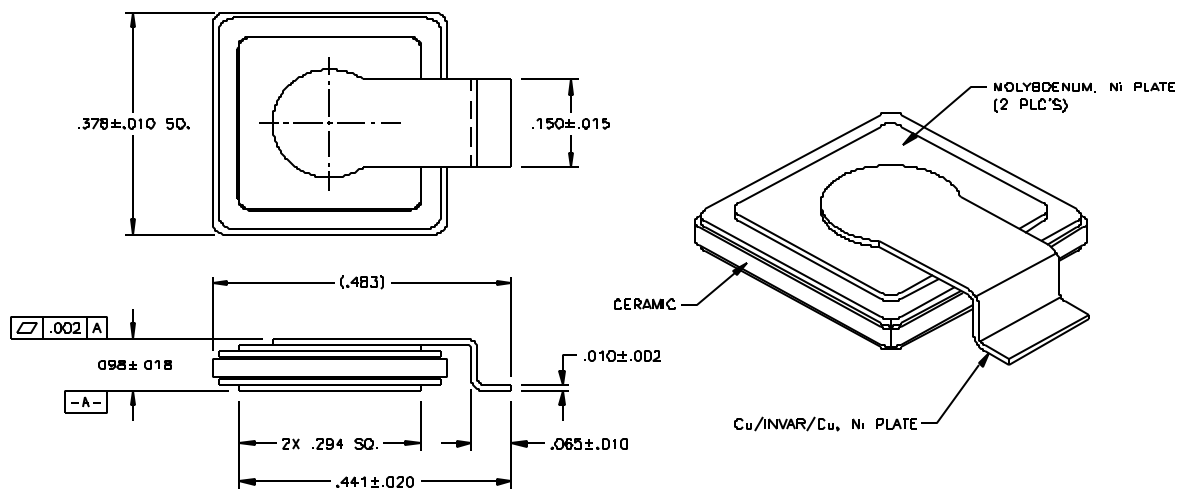

Electrical Parameters

DESCRIPTION	SYMBOL	CONDITIONS	MIN	TYP.	MAX	UNIT
Reverse (Leakage) Current	IR ₂₅	VR= 45 Vdc, Tc= 25°C		.01	1	mA
	IR ₁₂₅	VR= 45 Vdc, Tc= 125°C		10	100	mA
Forward Voltage pulse test, pw= 300 μs d/c≤ 2%	VF1	IF= 10A, Tc= 25°C		500	550	mV
	VF2	IF= 20A, Tc= 25°C		560	600	mV
	VF3	IF= 40A, Tc= 25°C		610	675	mV
	VF4	IF= 80A, Tc= 25°C		740	800	mV
	VF5	IF= 100A, Tc= 25°C		800		mV
	VF6	IF= 20A, Tc= -55°C		650	700	mV
	VF7	IF= 20A, Tc= 125°C		450		mV
Junction Capacitance	Cj1	VR= 10 Vdc		2500	3000	pF
	Cj2	VR= 5 Vdc		3500		pF
Breakdown Voltage	BVR	IR= 5 mA, Tc= 25°C		55		V
		IR= 5 mA, Tc= -55°C	45	50		V

VF vs IF Typical Curves

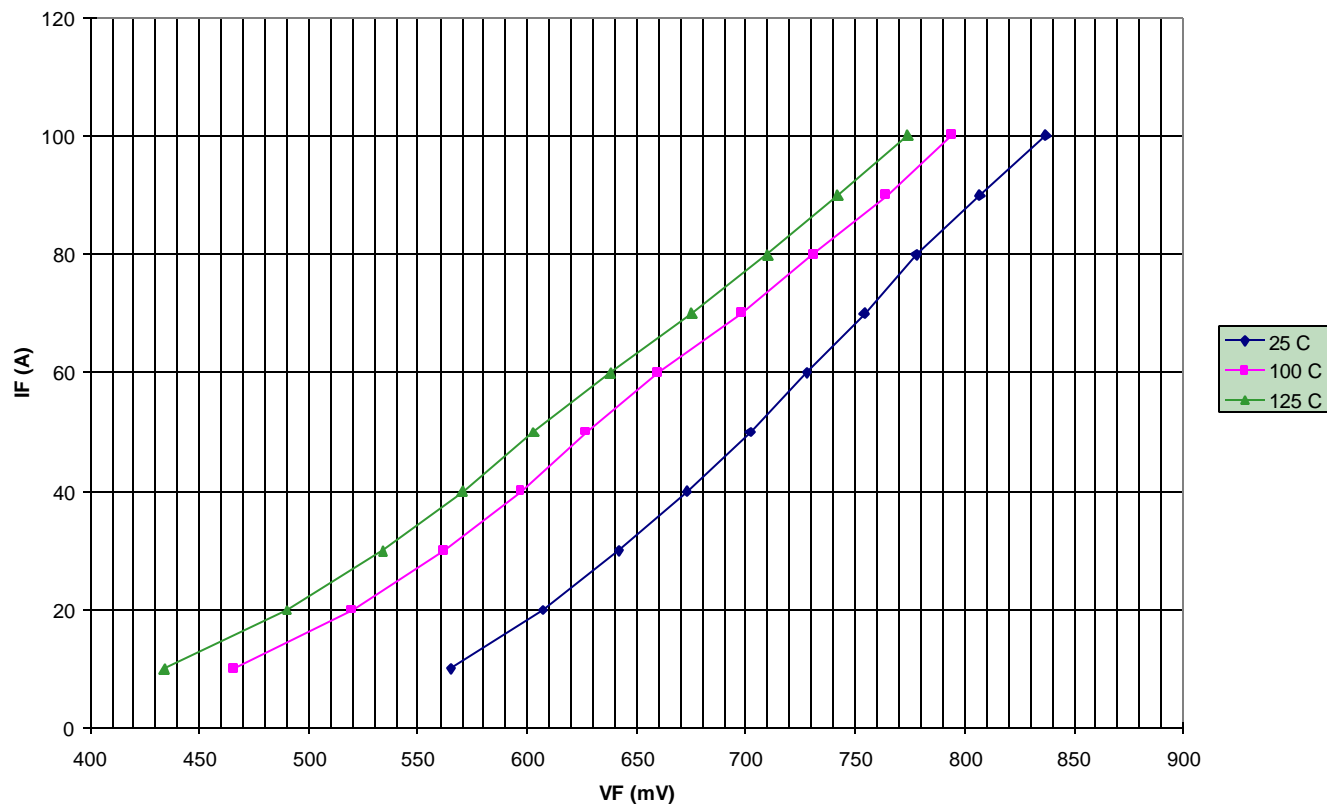



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.