

- AVAILABLE IN JAN, JANTX, JANTXV, AND JANS
PER MIL-PRF-19500/406
- 1.5 WATT ZENER DIODES
- NON CAVITY CONSTRUCTION
- METALLURGICALLY BONDED

**1N6485
THRU
1N6491
AND
1N4460
AND
1N4461**

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
 Storage Temperature: -65°C to +200°C
 Power Dissipation: 1.5W @ T_A=+25°C
 Power Derating: 10mW/°C above T_A=+25°C
 Forward Voltage: 1.0 V dc @ I_F=200mA dc
 1.5 V dc @ I_F=1A dc

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified

TYPE	ZENER VOLTAGE ±5% V _Z	TEST CURRENT I _{ZT}	DYNAMIC IMPEDENCE (MAX.) Z _{ZT} @I _{ZT}	KNEE IMPEDENCE (MAX.) Z _{ZK} @I _{ZT}	TEST CURRENT I _{ZK}	REVERSE CURRENT (MAX.) I _R @V _R	TEST VOLTAGE V _R	MAXIMUM CURRENT I _{ZM}	V _Z (REG) Δ V _Z	MAXIMUM SURGE
	VOLTS	mA	OHMS	OHMS	mA	μ A	VOLTS	MA	VOLTS	AMPS
1N6485	3.3	76.0	10	400	1.0	50	1.0	433	.90	4.2
1N6486	3.6	69.0	10	400	1.0	50	1.0	397	.80	3.9
1N6487	3.9	64.0	9	400	1.0	35	1.0	366	.75	3.6
1N6488	4.3	58.0	9	400	1.0	5.0	1.0	332	.70	3.3
1N6489	4.7	53.0	8	500	1.0	4.0	1.0	304	.60	3.0
1N6490	5.1	49.0	7	500	1.0	1.0	1.0	280	.50	2.7
1N6491	5.6	45.0	5	600	1.0	0.5	2.0	255	.40	2.5
1N4460	6.2	40.0	4	200	1.0	10.0	3.72	230	.35	2.3
1N4461	6.8	37.0	2.5	200	1.0	5.0	4.08	210	.30	2.1

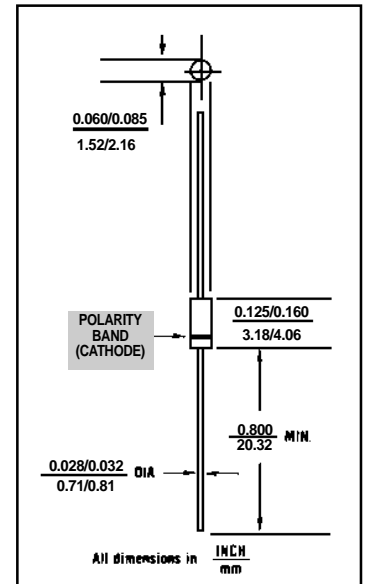


FIGURE 1

DESIGN DATA

CASE: Hermetically sealed, Glass "A"
 Body per MIL-PRF- 19500/406
 D-5A

LEAD MATERIAL: Copper clad steel

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: (R_{ΘJL}): 42
 °C/W maximum at L = .375

THERMAL IMPEDANCE: (Z_{ΘJX}): 4.5
 °C/W maximum

POLARITY: Diode to be operated with
 the banded (cathode) end positive.

MOUNTING POSITION: Any



COMPENSATED DEVICES INCORPORATED

22 COREY STREET, MELROSE, MASSACHUSETTS 02176

PHONE (781) 665-1071

WEBSITE: <http://www.cdi-diodes.com>

FAX (781) 665-7379

E-mail: mail@cdi-diodes.com

1N6485 thru 1N6491 and 1N4460 and 1N4461

FIGURE 2


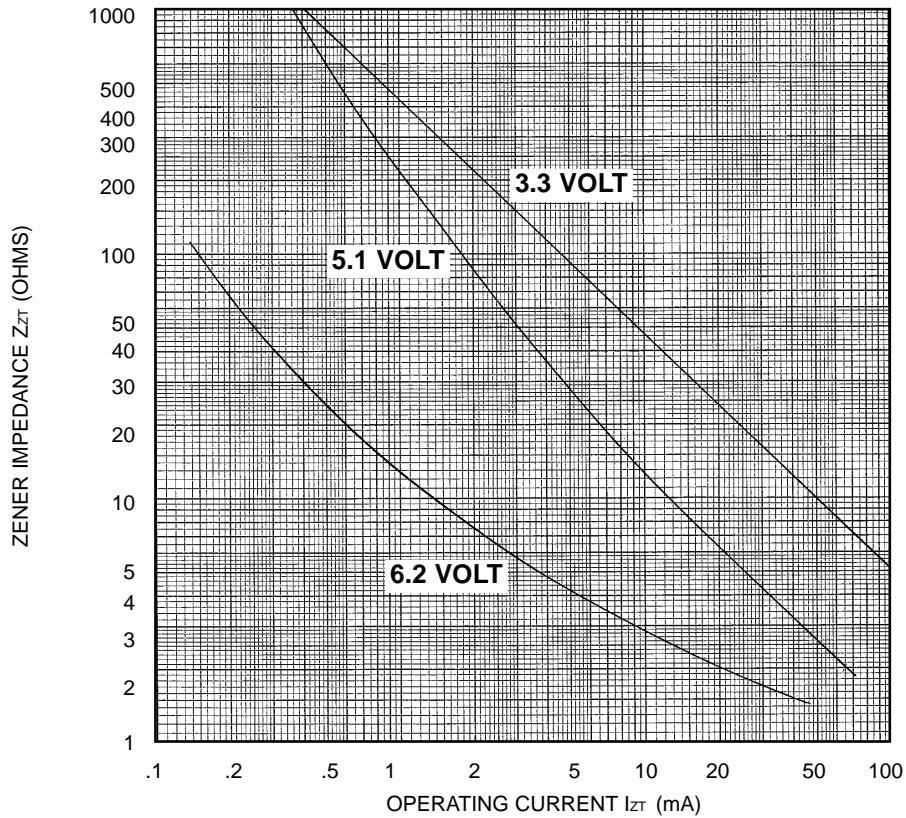


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT

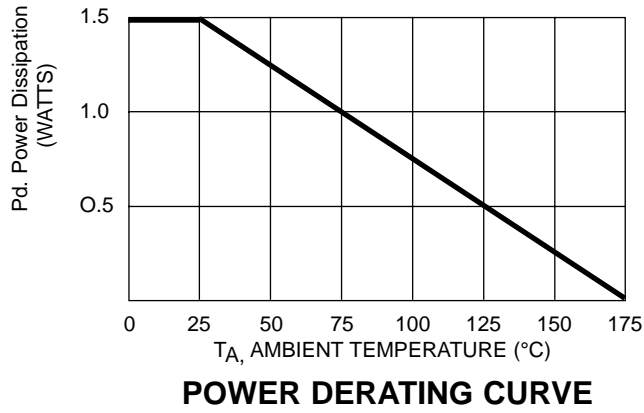

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.