


### Features

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Fast Switching Time
- Low Reverse Capacitance
- Surface Mount Package Ideally Suited for Automatic Insertion

### Mechanical Data

- Case: SOD-123, Plastic
- Case material - UL Flammability Rating Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 3
- Polarity: Cathode Band
- Marking: Date Code and Type Code, See Page 3
- Type Code: SB
- Weight: 0.01 grams (approx.)
- Ordering Information: See Page 3

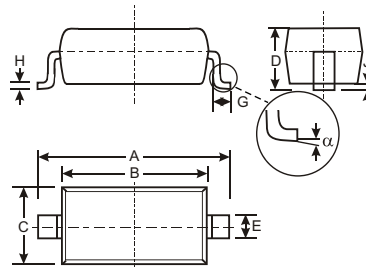

SOD-123		
Dim	Min	Max
A	3.55	3.85
B	2.55	2.85
C	1.40	1.70
D	—	1.35
E	0.55 Typical	
G	0.25	—
H	0.11 Typical	
J	—	0.10
α	0°	8°
All Dimensions in mm		

### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	60	V
Working Peak Reverse Voltage	V <sub>RWM</sub>		
DC Blocking Voltage	V <sub>R</sub>		
RMS Reverse Voltage	V <sub>R(RMS)</sub>	42	V
Forward Continuous Current	I <sub>F</sub>	15	mA
Non-Repetitive Peak Forward Surge Current	I <sub>FSM</sub>	50	mA
@ t ≤ 1.0s		2.0	A
Power Dissipation (Note 1)	P <sub>D</sub>	333	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R <sub>θJA</sub>	300	°C/W
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C

Note: 1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

### Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	$V_{(BR)R}$	60	—	—	V	$I_R = 10\mu\text{A}$
Reverse Leakage Current (Note 2)	$I_{RM}$	—	—	200	nA	$V_R = 50\text{V}$
Forward Voltage Drop	$V_{FM}$	—	—	0.41 1.0	V	$I_F = 1.0\text{mA}$ $I_F = 15\text{mA}$
Total Capacitance	$C_T$	—	—	2.2	pF	$V_R = 0\text{V}$ , $f = 1.0\text{MHz}$
Reverse Recovery Time	$t_{rr}$	—	—	1.0	ns	$I_F = I_R = 5.0\text{mA}$ $t_{rr} = 0.1 \times I_R$ , $R_L = 100\Omega$

Note: 2. Short duration test pulse used to minimize self-heating effect.

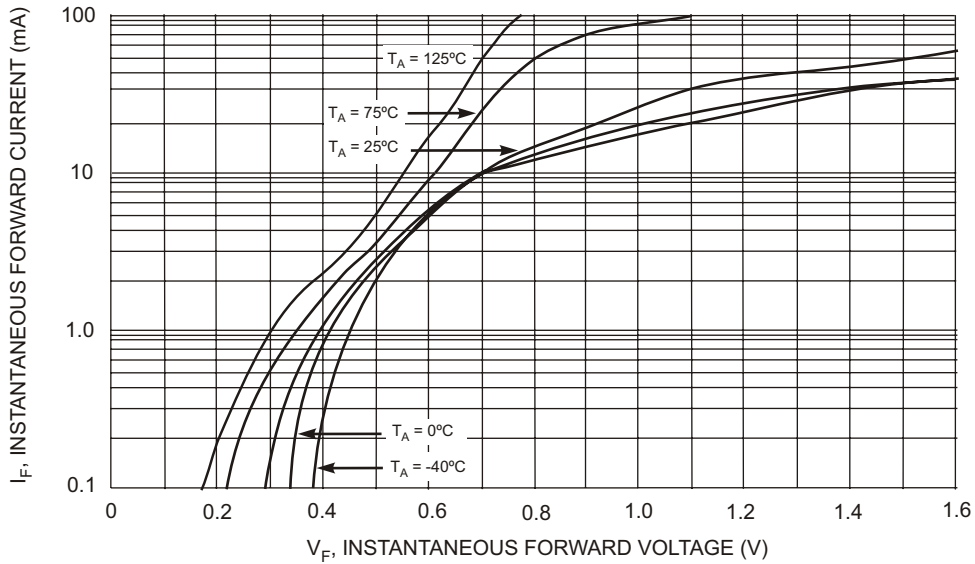


Fig. 1 Typical Forward Characteristics



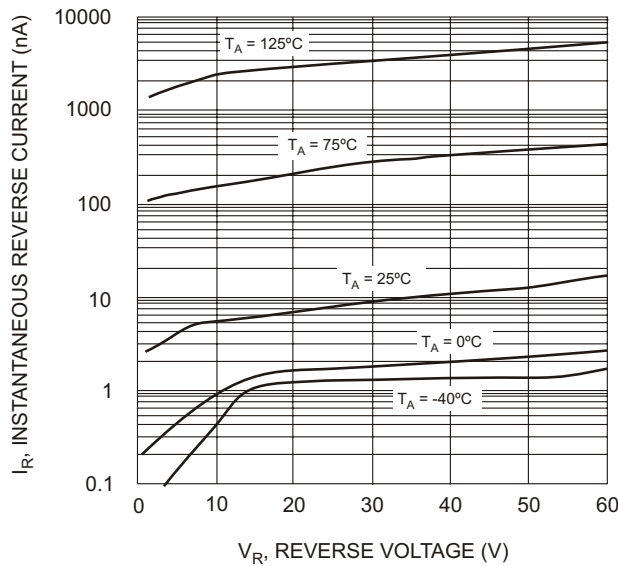


Fig. 2 Typical Reverse Characteristics

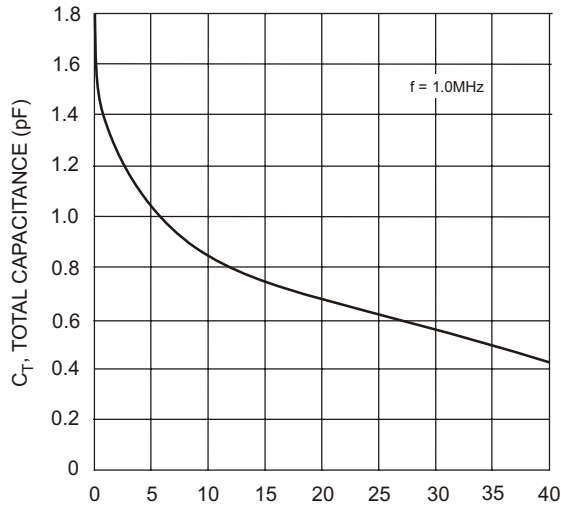

V<sub>R</sub>, REVERSE VOLTAGE (V)  
Fig. 3 Typical Capacitance

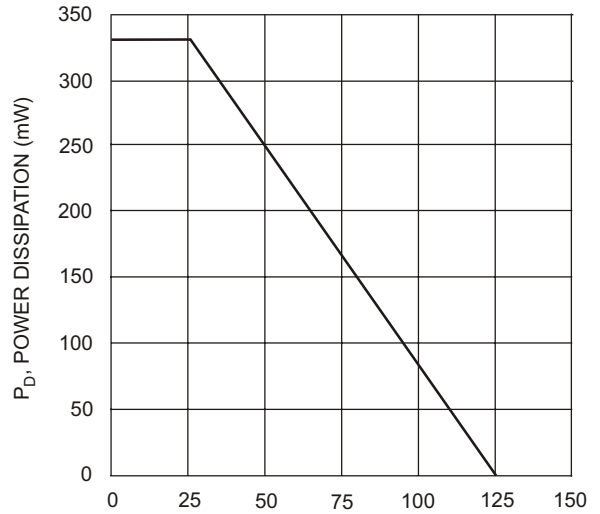


T<sub>A</sub>, AMBIENT TEMPERATURE (°C)  
Fig. 4 Power Derating Curve

### Ordering Information (Note 3)

Device	Packaging	Shipping
1N6263W-7	SOD-123	3000/Tape and Reel

- Note: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.  
 4. For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to part number above.  
 Example: 1N6263W-7-F.

### Marking Information



SB = Product Type Marking Code  
 YM = Date Code Marking  
 Y = Year (ex: N = 2002)  
 M = Month (ex: 9 = September)

#### Date Code Key

Year	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009
Code	J	K	L	M	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.