

1N5820S - 1N5822S

SCHOTTKY BARRIER RECTIFIER DIODES


PRV : 20 - 40 Volts
I_o : 3.0 Ampere

FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * High efficiency
- * Low power loss
- * Low cost
- * Low forward voltage drop

MECHANICAL DATA :

- * Case : D2A Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.645 gram

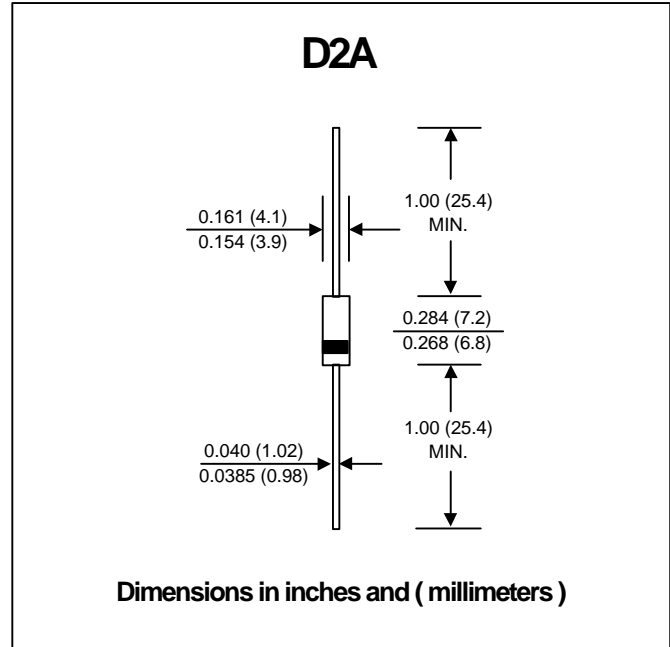

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	1N5820S	1N5821S	1N5822S	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	Volts
Maximum Average Forward Current 0.375", 9.5mm Lead Length at T _L = 95 °C	I _{F(AV)}	3.0			Amps.
Peak Forward Surge Current, 8.3ms single half sine wave Superimposed on rated load (JEDEC Method) T _L = 75°C	I _{FSM}	80			Amps.
Maximum Forward Voltage at I _F = 3.0 Amp. (Note 1)	V _F	0.475	0.500	0.525	Volt.
Maximum Reverse Current at T _a = 25 °C	I _R	2.0			mA
Rated DC Blocking Voltage (Note 1) T _a = 100 °C	I _{R(H)}	20			mA
Typical Thermal Resistance (Note 2)	R _{θJL}	20			°C/W
Junction Temperature Range	T _J	- 65 to + 125			°C
Storage Temperature Range	T _{STG}	- 65 to + 125			°C

Notes :

- (1) Pulse Test : Pulse Width = 300 μs, Duty Cycle = 2%.
- (2) Thermal Resistance from Junction to Lead Vertical PC Board Mounting, 0.5" (12.5mm) Lead Lengths with 2.5 in² (63.5mm²) copper pads.

RATING AND CHARACTERISTIC CURVES (1N5820S - 1N5822S)

FIG.1 - FORWARD CURRENT DERATING CURVE

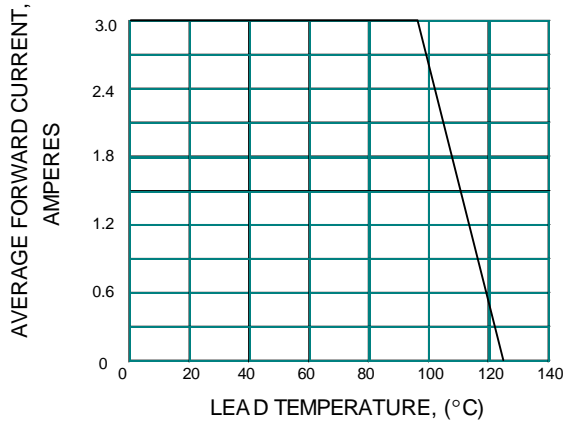


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

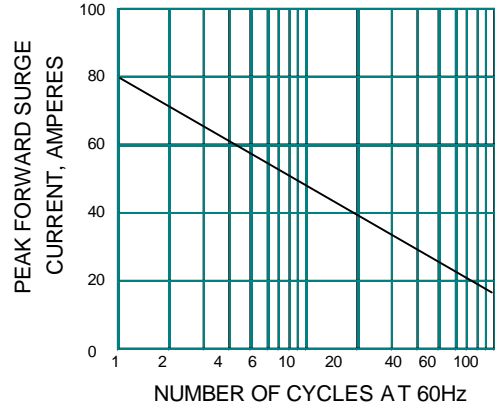


FIG.3 - TYPICAL FORWARD CHARACTERISTICS


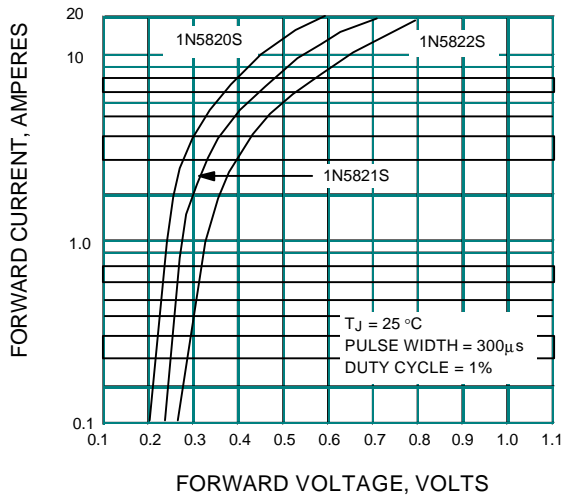


FIG.4 - TYPICAL REVERSE CHARACTERISTICS



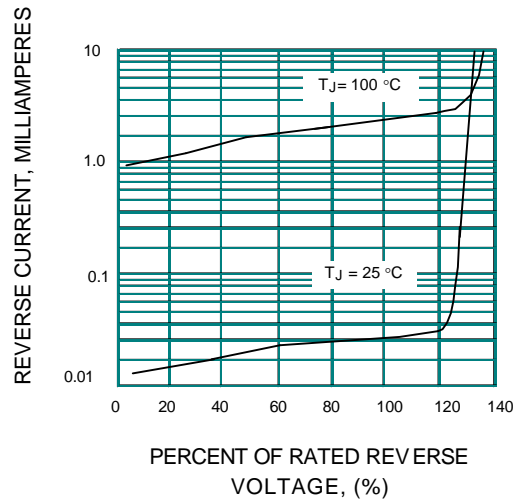

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.