

Microsemi Corp.
The diode experts

ALSO
AVAILABLE IN
SURFACE
MOUNT

**1N5807
thru
1N5811**



SANTA ANA, CA
For more information call:
(714) 979-8220

FEATURES

- MICROMINIATURE PACKAGE
- VOIDLESS HERMETICALLY SEALED GLASS PACKAGE
- TRIPLE LAYER PASSIVATION
- METALLURGICALLY BONDED
- ULTRA FAST RECOVERY
- HIGH SURGE CAPABILITY AND EXTREMELY STABLE CHARACTERISTICS
- PIV TO 160 VOLTS
- JAN/S/TX/TXV TYPES AVAILABLE PER MIL-S-19500/477

MAXIMUM RATINGS

Operating Temperature: -55°C to +200°C.
Storage Temperature: -55°C to +200°C.

ELECTRICAL CHARACTERISTICS

TYPE	PEAK INVERSE VOLTAGE (MIN.) PIV	BREAKDOWN VOLTAGE (MIN.) V_B @ 100 μ A	AVERAGE RECTIFIED CURRENT I_O	FORWARD VOLTAGE DROP (MAX.) V_F		REVERSE CURRENT (MAX.) I_R @ PIV		SURGE CURRENT (MAX.) (NOTE 1) I_F (surge)	JUNCTION CAPACITANCE (MAX.) C_j @ -10 V	REVERSE RECOVERY TIME (MAX.) (NOTE 2)
	VOLTS	VOLTS	AMPS	VOLTS		μ A		AMPS	pF	nsec
			T_A 55°C	25°C	100°C	25°C	100°C			
1N5807	50	55	6.0	.875	.700	5				30
1N5808	75	80	@	@	@	5	150	125	50	30
1N5809	100	110	$T_L =$ 4Adc	4Adc	6Adc	5	@	Single cycle		30
1N5810	125	135	75°C	250	250	5	75°C	8.3msec	typ.	30
1N5811	150	160	($L = \frac{3}{4}$ ")	msec pulse width	msec pulse width	5				30

NOTE 1: $T_A = 55^\circ\text{C}$ @ rated I_O and V_{RM} . 10-8.3 msec surges

NOTE 2: $I_F = 1.0A$. $I_R = 1.0A$, recover to .1A

ULTRA FAST RECTIFIERS

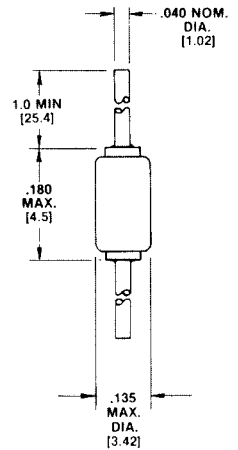


FIGURE 1
PACKAGE E

MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed hard glass.

LEAD MATERIAL: Silver clad copper.

MARKING: Body painted, alpha numeric.

POLARITY: Cathode band.

1N5807 thru 1N5811

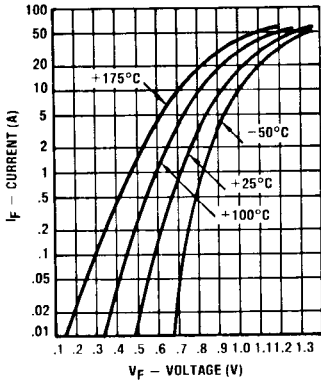


FIGURE 2
TYPICAL FORWARD CURRENT
vs. FORWARD VOLTAGE

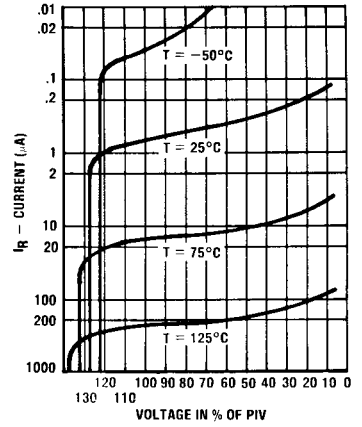


FIGURE 3
TYPICAL REVERSE CURRENT
vs. VOLTAGE




FIGURE 4
OUTPUT CURRENT vs. LEAD TEMP.


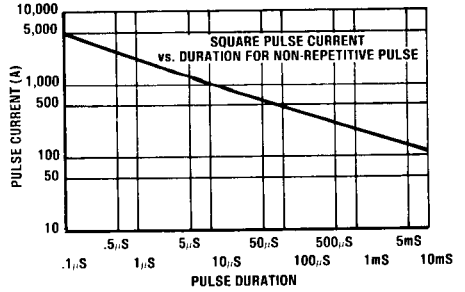


FIGURE 5
FORWARD PULSE CURRENT vs. DURATION

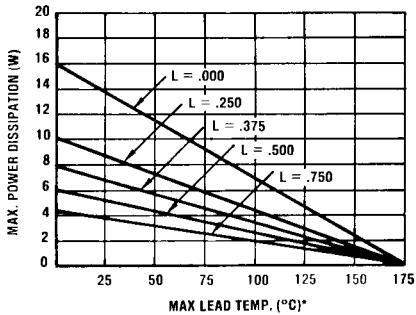

*Maximum lead temp. in °C (T_L) at point "L" from body.
(For max. operating junction temp. of 175°C with equal two-lead conditions.)

FIGURE 6
MAXIMUM LEAD TEMP. vs P_d

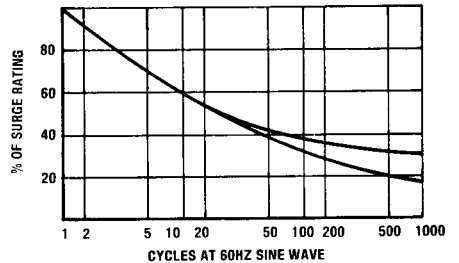


FIGURE 7
MULTIPLE SURGE CURRENT vs. DURATION

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.