



**1N483B thru
1N486B and
1N5194 thru
1N5196**

SANTA ANA, CA

For more information call:
(714) 979-8220

FEATURES

- Voidless hermetically sealed glass package (D0-35).
- Triple layer passivation.
- Metallurgically bonded.
- TX types available per MIL-S-19500/118C.
- 1N5194 thru 1N5196 only available in surface mount.

MAXIMUM RATINGS

Operating Temperature: -65°C to +200°C.
Storage Temperature: -65°C to +200°C.
Surge Current: 2A


ELECTRICAL CHARACTERISTICS

TYPE	WORKING PEAK REVERSE VOLTAGE V _{RWM}	BREAKDOWN VOLTAGE (MIN.) V _(BR) @ 100 µA	AVERAGE RECTIFIED CURRENT I _O		FORWARD VOLTAGE DROP (MAX.) V _F	REVERSE CURRENT (MAX.) I _R @ V _{RWM}		SURGE CURRENT (MAX.) (NOTE 1) I _S SURGE	JUNCTION CAPACITANCE C _J @ 0V	
			AMPS			VOLTS	µA			
			25°C	150°C		25°C	150°C			
JAN 1N483B	70	80	.2	.05	1.0V (pk) @ 100mA pulse	.025	5	2	8	
JAN 1N485B	180	200	.2	.05		.025	5	2	8	
JAN 1N486B	225	250	.2	.05		.025	5	2	8	
JAN 1N5194 JAN 1N5195 JAN 1N5196	SAME AS JAN 1N483B SAME AS JAN 1N485B SAME AS JAN 1N486B				} EXCEPT: PACKAGE D035					

PACKAGE: D07 for JAN 1N483B, 485B, 486B.
D035 for JAN 1N5194, JAN 1N5195, and JAN 1N5196.

NOTE 1: I_O = 200mAdc, 10 - 8.3msec surges


**GENERAL PURPOSE
SILICON DIODES**

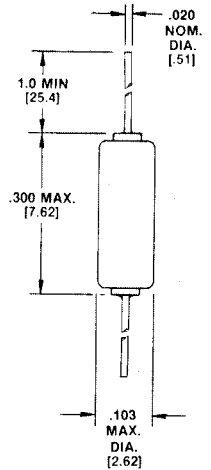

**FIGURE 1A
PACKAGE D07**

**MECHANICAL
CHARACTERISTICS**

Case: Hermetically sealed glass case.
Lead Material: Tinned copper.
Marking: Body painted, alpha numeric.
Polarity: Cathode band.

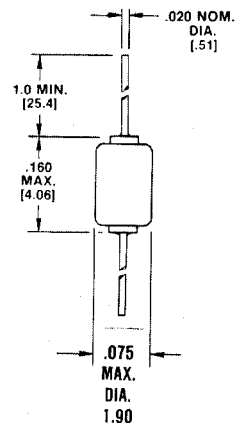

**FIGURE 1B
PACKAGE D0-35**

1N483B - 1N486B. 1N5194 - 1N5196

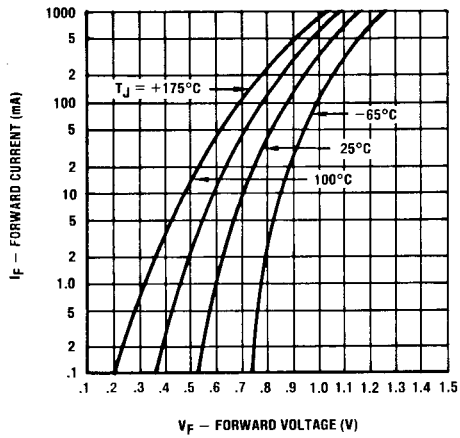


FIGURE 2
FORWARD VOLTAGE vs. FORWARD CURRENT

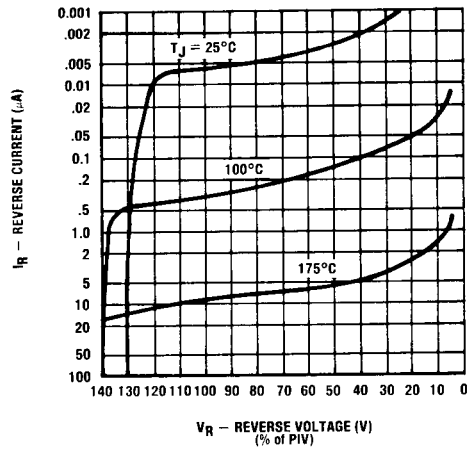


FIGURE 3
REVERSE VOLTAGE vs. REVERSE CURRENT

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.