

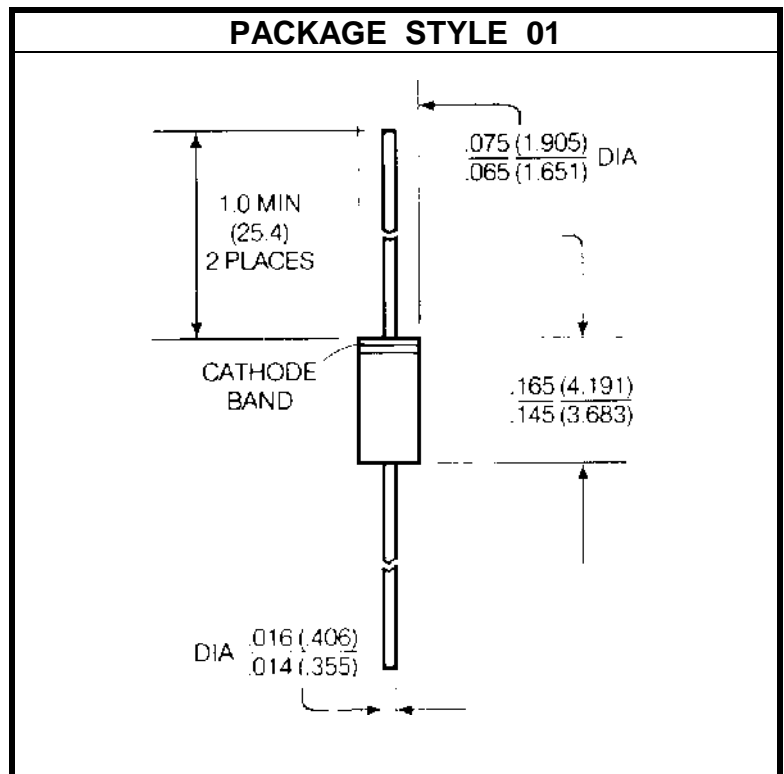
SILICON PIN DIODE

DESCRIPTION:

The **1N5719** is a Silicon PIN Diode Designed for General Purpose Attenuator and Switching Applications from 100 MHz to 3 GHz.

MAXIMUM RATINGS

I_F	100 mA
V_R	150 V
P_{DISS}	250 mW @ T _A = 25 °C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +200 °C
θ_{JC}	0.7 °C/mW


CHARACTERISTICS T_C = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
V_{BR}	I _R = 10 μA	150			V
C_T	V _R = 100 V f = 1.0 MHz			0.3	pF
R_S	I _F = 100 mA f = 100 MHz			1.25	Ω
τ	I _F = 50 mA I _R = 250 mA	100			μS
t_{rr}	V _R = 10 V f = 20 MHz		100		μS

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.