

Microsemi Corp.
The diode experts

**1N5518
thru
1N5546**

SCOTTSDALE, AZ

For more information call:
(602) 941-6300

**ALSO
AVAILABLE IN
SURFACE
MOUNT**

FEATURES

- LOW ZENER NOISE SPECIFIED
- LOW ZENER IMPEDANCE
- LOW LEAKAGE CURRENT
- HERMETICALLY SEALED GLASS PACKAGE
- JAN/JANTX/JANTXV AVAILABLE ON 1N5518 THROUGH 1N5546B PER MIL-S-19500/437


MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C

ELECTRICAL CHARACTERISTICS

($I_A = 25$ C unless otherwise noted. Based on dc measurements at thermal equilibrium; $V_F = 1.1$ Max @ $I_F = 200$ mA for all types)

JEDEC TYPE NO. (Note 1)	NOMINAL ZENER VOLTAGE V_Z @ IZT VOLTS (Note 2)	TEST CURRENT IZT mAdc	MAX. ZENER IMPEDANCE B-C-D SUFFIX ZzT @ IZT OHMS (Note 3)	MAX. REVERSE LEAKAGE CURRENT			B-C-D SUFFIX MAXIMUM DC ZENER CURRENT IZM mAdc (Note 5)	B-C-D SUFFIX MAX. NOISE DENSITY AT IZ = 250 μ A ND (MICRO-VOLTS PER SQUARE ROOT CYCLE)	REGULATION FACTOR ΔV_Z VOLTS (Note 6)	LOW V_Z CURRENT IZL mAdc
				VR - VOLTS		I _R μ Adc (Note 4)				
				NON & A-SUFFIX	B-C-D SUFFIX					
1N5518	3.3	20	26	5.0	0.90	1.0	115	0.5	0.90	2.0
1N5519	3.6	20	24	3.0	0.90	1.0	105	0.5	0.90	2.0
1N5520	3.9	20	22	1.0	0.90	1.0	98	0.5	0.85	2.0
1N5521	4.3	20	18	3.0	1.0	1.5	88	0.5	0.75	2.0
1N5522	4.7	10	22	2.0	1.5	2.0	81	0.5	0.60	1.0
1N5523	5.1	5.0	26	2.0	2.0	2.5	75	0.5	0.85	0.25
1N5524	5.6	3.0	30	2.0	3.0	3.5	68	1.0	0.30	0.25
1N5525	6.2	1.0	30	1.0	4.5	5.0	61	1.0	0.20	0.01
1N5526	6.8	1.0	30	1.0	5.5	6.2	56	1.0	0.10	0.01
1N5527	7.5	1.0	35	0.5	6.0	6.8	51	2.0	0.05	0.01
1N5528	8.2	1.0	40	0.5	6.5	7.5	46	4.0	0.05	0.01
1N5529	9.1	1.0	45	0.1	7.0	8.2	42	4.0	0.05	0.01
1N5530	10.0	1.0	60	0.05	8.0	9.1	38	4.0	0.10	0.01
1N5531	11.0	1.0	80	0.05	9.0	9.9	35	5.0	0.20	0.01
1N5532	12.0	1.0	90	0.05	9.5	10.8	32	10	0.20	0.01
1N5533	13.0	1.0	90	0.01	10.5	11.7	29	15	0.20	0.01
1N5534	14.0	1.0	100	0.01	11.5	12.6	27	20	0.20	0.01
1N5535	15.0	1.0	100	0.01	12.5	13.5	25	20	0.20	0.01
1N5536	16.0	1.0	100	0.01	13.0	14.4	24	20	0.20	0.01
1N5537	17.0	1.0	100	0.01	14.0	15.3	22	20	0.20	0.01
1N5538	18.0	1.0	100	0.01	15.0	16.2	21	20	0.20	0.01
1N5539	19.0	1.0	100	0.01	16.0	17.1	20	20	0.20	0.01
1N5540	20.0	1.0	100	0.01	17.0	18.0	19	20	0.20	0.01
1N5541	22.0	1.0	100	0.01	18.0	19.8	17	20	0.25	0.01
1N5542	24.0	1.0	100	0.01	20.0	21.6	16	20	0.30	0.01
1N5543	25.0	1.0	100	0.01	21.0	22.4	15	20	0.35	0.01
1N5544	28.0	1.0	100	0.01	23.0	25.2	14	20	0.40	0.01
1N5545	30.0	1.0	100	0.01	24.0	27.0	13	20	0.45	0.01
1N5546	33.0	1.0	100	0.01	28.0	29.7	12	20	0.50	0.01

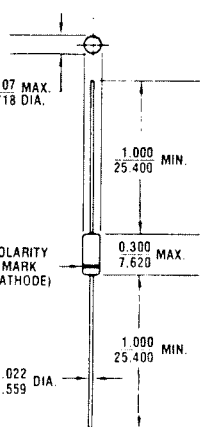

All dimensions in INCH m.m.

**FIGURE 1
DO-7**

NOTE 1 - TOLERANCE AND VOLTAGE DESIGNATION

The JEDEC type numbers shown are $\pm 20\%$ with guaranteed limits for only V_Z , I_R , and V_F . Units with 'A' suffix are $\pm 10\%$ with guaranteed limits for V_Z , I_R , and V_F . Units with guaranteed limits for all six parameters are indicated by a 'B' suffix for $\pm 5.0\%$ units, 'C' suffix for $\pm 2.0\%$ and 'D' suffix for $\pm 1.0\%$.

NOTE 2 - ZENER VOLTAGE (V_Z) MEASUREMENT

Nominal zener voltage is measured with the device junction in thermal equilibrium with ambient temperature of 25°C.

NOTE 3 - ZENER IMPEDANCE (Z_Z) DERIVATION

The zener impedance is derived from the 60 Hz ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (IZT) is superimposed on IZT

NOTE 4 - REVERSE LEAKAGE CURRENT (I_R)

Reverse leakage currents are guaranteed and are measured at V_R as shown on the table.

NOTE 5 - MAXIMUM REGULATOR CURRENT (I_{ZM})

The maximum current shown is based on the maximum voltage of a 5.0% type unit, therefore, it applies only to the 'B' suffix device. The actual I_{ZM} for any device may not exceed the value of 400 milliwatts divided by the actual V_Z of the device.

NOTE 6 - MAXIMUM REGULATION FACTOR (ΔV_Z)

ΔV_Z is the maximum difference between V_Z at IZT and V_Z at IZL measured with the device junction in thermal equilibrium.

MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case. DO-7.

FINISH: Corrosion resistant. Leads are solderable.

MARKING: Body painted, alpha numeric.

POLARITY: Diode to be operated with the banded end positive with respect to the opposite end.

THERMAL RESISTANCE: 300°C/W (Typical) junction to lead at 0.375-inches from body.

1N5518 thru 1N5546 DO-7

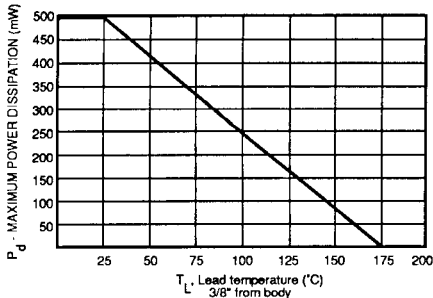


FIGURE 2
POWER-TEMPERATURE
DERATING CURVE

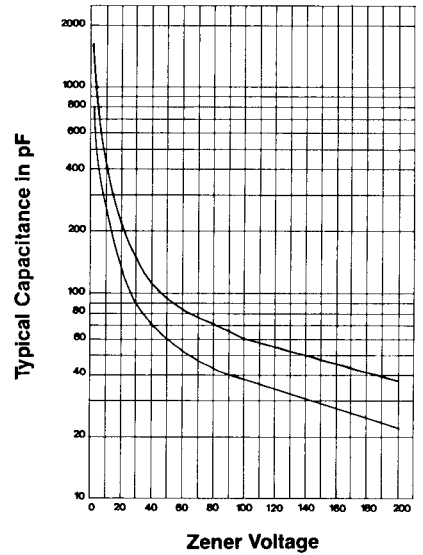


FIGURE 3
CAPACITANCE VS. ZENER VOLTAGE
(TYPICAL)

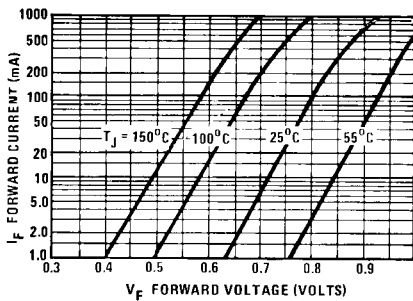


FIGURE 4
TYPICAL FORWARD
CHARACTERISTICS

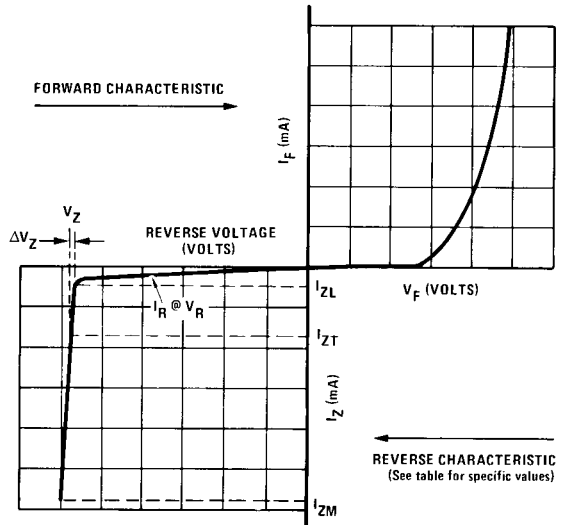


FIGURE 5
ZENER DIODE CHARACTERISTICS
AND SYMBOL IDENTIFICATION



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.