


ZENER DIODES

- VOLTAGE RANGE : 3.3V TO 200V
- HERMETICALLY SEALED PLASTIC CASE
- HIGH SURGE CAPABILITY (up to 180W @ 8.3ms)

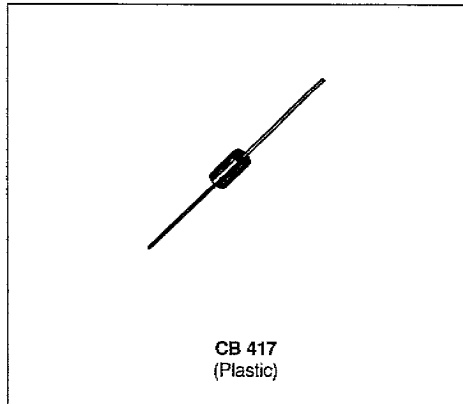

DESCRIPTION

5W silicon Zener diodes.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
P_{tot}	Power Dissipation*	$T_{amb} = 75^{\circ}C$	5	W
I_{zM}	Continuous Reverse Current*	$T_{amb} = 75^{\circ}C$	See page 2	A
I_{zSM}	Peak Reverse Current	$T_{amb} = 25^{\circ}C$	See page 2	A
T_{stg} T_J	Storage and Junction Temperature Range		- 65 to 175 - 65 to 200	$^{\circ}C$
T_L	Maximum Temperature for Soldering during 10s at 4mm from case		230	$^{\circ}C$

THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction-ambient*	25	$^{\circ}C/W$

* On infinite heatsink with 10mm lead length.

ELECTRICAL CHARACTERISTICS (T_{amb} = 25°C unless otherwise specified)

Types	V _{ZT} /I _{ZT} [*] nom.	I _{ZT} [*]	r _{ZT} /I _{ZT} [*] max.	r _{ZK} /I _{ZK} max.	I _R / V _R max.		∞VZ typ.	I _{ZM} max.	ΔV _Z max.	I _{ZSM} max.
	(V) (1)	(mA) (1)	(Ω) (1)	1.0mA (Ω)	(μA)	(V)	(10 ⁻⁴ /°C)	T _{amb} =75°C (mA) (2)	(V) (3)	(A) (4)
1N 5333 B	3,3	380	3,0	400	300	1,0	- 6	1440	0,85	22,2
1N 5334 B	3,6	350	2,5	500	150	1,0	- 5,5	1320	0,80	20,4
1N 5335 B	3,9	320	2,0	500	50	1,0	- 5	1220	0,54	18,8
1N 5336 B	4,3	290	2,0	500	10	1,0	- 4	1100	0,49	17,0
1N 5337 B	4,7	260	2,0	450	5,0	1,0	- 2	1010	0,44	15,6
P 1N 5338 B	5,1	240	1,5	400	1,0	1,0	1	930	0,39	14,4
P 1N 5339 B	5,6	220	1,0	400	1,0	2,0	2,5	865	0,25	13,1
1N 5340 B	6,0	200	1,0	300	1,0	3,0	2,8	790	0,19	12,2
P 1N 5341 B	6,2	200	1,0	200	1,0	3,0	3,2	765	0,10	11,8
P 1N 5342 B	6,8	175	1,0	200	10	5,2	4	700	0,15	10,8
1N 5343 B	7,5	175	1,5	200	10	5,7	4,5	630	0,15	9,8
1N 5344 B	8,2	150	1,5	200	10	6,2	4,8	580	0,20	8,9
1N 5345 B	8,7	150	2,0	200	10	6,6	4,9	545	0,20	8,4
1N 5346 B	9,1	150	2,0	150	7,5	6,9	5,1	520	0,22	8,1
1N 5347 B	10	125	2,0	125	5,0	7,6	5,5	475	0,22	7,3
1N 5348 B	11	125	2,5	125	5,0	8,4	6	430	0,25	11,0
P 1N 5349 B	12	100	2,5	125	2,0	9,1	6,5	395	0,25	10,1
1N 5350 B	13	100	2,5	100	1,0	9,9	6,5	365	0,25	9,3
1N 5351 B	14	100	2,5	75	1,0	10,6	7	340	0,25	8,6
P 1N 5352 B	15	75	2,5	75	1,0	11,5	7	315	0,25	8,1
P 1N 5353 B	16	75	2,5	75	1,0	12,2	7	295	0,30	7,6
1N 5354 B	17	70	2,5	75	0,5	12,9	7	280	0,36	7,1
P 1N 5355 B	18	65	2,5	75	0,5	13,7	7,5	264	0,40	6,7
1N 5356 B	19	65	3,0	75	0,5	14,4	7,5	250	0,40	6,4
1N 5357 B	20	65	3,0	75	0,5	15,2	7,5	237	0,40	6,0
P 1N 5358 B	22	50	3,5	75	0,5	16,7	9	216	0,45	5,5
P 1N 5359 B	24	50	3,5	100	0,5	18,2	8	198	0,55	5,0
1N 5360 B	25	50	4,0	110	0,5	19,0	8	190	0,55	4,8
P 1N 5361 B	27	50	5,0	120	0,5	20,6	8,5	176	0,60	4,5
1N 5362 B	28	50	6,0	130	0,5	21,2	8,5	170	0,60	4,3
P 1N 5363 B	30	40	8,0	140	0,5	22,8	8,5	158	0,60	4,0
1N 5364 B	33	40	10	150	0,5	25,1	8,5	144	0,60	3,7
P 1N 5365 B	36	30	11	160	0,5	27,4	9	132	0,65	3,4
1N 5366 B	39	30	14	170	0,5	29,7	9	122	0,65	3,1
1N 5367 B	43	30	20	190	0,5	32,7	9	110	0,70	2,8
1N 5368 B	47	25	25	210	0,5	35,8	9	100	0,80	2,6
1N 5369 B	51	25	27	230	0,5	38,8	9	93	0,90	2,4
1N 5370 B	56	20	35	280	0,5	42,6	9	86	1,00	2,2
1N 5371 B	60	20	40	350	0,5	45,5	9	79	1,20	2,0
P 1N 5372 B	62	20	42	400	0,5	47,1	9	76	1,35	1,9
1N 5373 B	68	20	44	500	0,5	51,7	9	70	1,50	1,8
1N 5374 B	75	20	45	620	0,5	56,0	9	63	1,60	1,6
1N 5375 B	82	15	65	720	0,5	62,2	9	58	1,80	1,5
1N 5376 B	87	15	75	760	0,5	66,0	9	54,5	2,00	1,4
1N 5377 B	91	15	75	760	0,5	69,2	9	52,5	2,20	1,3
P 1N 5378 B	100	12	90	800	0,5	76,0	9,5	47,5	2,50	1,2
1N 5379 B	110	12	125	1000	0,5	83,6	9,5	43	2,50	1,1
1N 5380 B	120	10	170	1150	0,5	91,2	9,5	39,5	2,50	1,0
1N 5381 B	130	10	190	1250	0,5	98,8	9,5	36,5	2,50	0,93
1N 5382 B	140	8,0	230	1500	0,5	106	9,5	34	2,50	0,86

(1) Pulse test : t_p ≤ 50ms δ < 2%

(2) On infinite heatsink : d = 10mm

(3) Measured between 10% and 50% of I_{ZM}.

(4) Rectangular waveform (t_p = 10ms).

Tolerance on nominal V_{ZT} : ± 5%.

P : Preferred voltages.

Forward voltage drop : V_F ≤ 1.2V (T_{amb} = 25°C, I_F = 1A)

ELECTRICAL CHARACTERISTICS (continued)


Types	V_{ZT}/I_{ZT}^* nom.	I_{ZT}^*	r_{ZT}/I_{ZT}^* max.	r_{ZK}/I_{ZK} max.	I_R / V_R max.		$\approx V_Z$ typ.	I_{ZM} max.	ΔV_Z max.	I_{ZSM} max.
	(V) (1)	(mA) (1)	(Ω) (1)	1.0mA (Ω)	(μA)	(V)	($10^{-4}/^{\circ}C$)	$T_{amb}=75^{\circ}C$ (mA) (2)	(V) (3)	(A) (4)
P 1N 5383 B	150	8.0	330	1500	0.5	114	9.5	31.6	3.00	0.81
1N 5384 B	160	8.0	350	1650	0.5	122	9.5	29.4	3.00	0.76
1N 5385 B	170	8.0	380	1750	0.5	129	9.5	28	3.00	0.71
P 1N 5386 B	180	5.0	430	1750	0.5	137	9.5	26.4	4.00	0.67
1N 5387 B	190	5.0	450	1850	0.5	144	9.5	25	5.00	0.64
P 1N 5388 B	200	5.0	480	1850	0.5	152	10	23.6	5.00	0.60

- (1) Pulse test : $t_p \leq 50ms$ $\delta < 2\%$
- (2) On infinite heatsink : $d = 10mm$
- (3) Measured between 10% and 50% of I_{ZM} .
- (4) Rectangular waveform ($t_p = 10ms$).

Tolerance on nominal V_{ZT} : $\pm 5\%$.
 P : Preferred voltages.
 Forward voltage drop : $V_F \leq 1.2V$ ($T_{amb} = 25^{\circ}C$, $I_F = 1A$)

PACKAGE MECHANICAL DATA

CB-417 Plastic

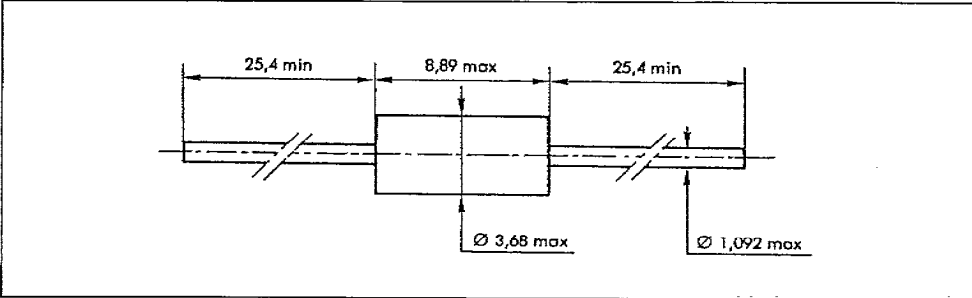

Cooling method : by convection (method A)
 Marking : clear, ring at cathode end.
 Weight : 0.6g

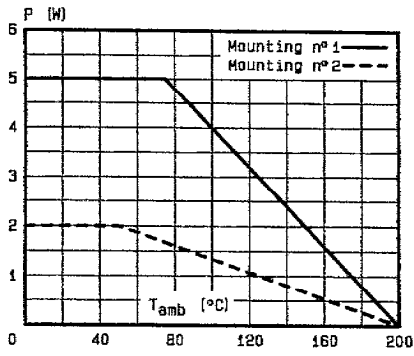


Fig.1 - Power dissipation versus ambient temperature.

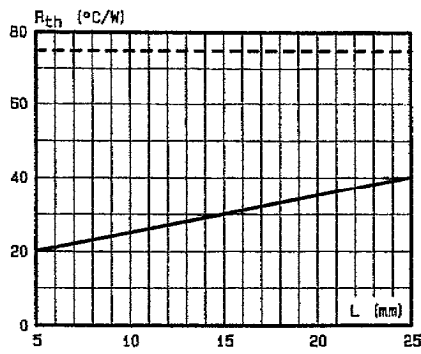


Fig.2 - Thermal resistance versus lead length.

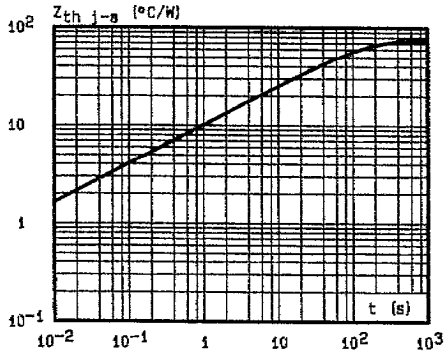


Fig.3 - Transient thermal impedance junction-ambient for mounting n°2 versus pulse duration (L = 10 mm).

Mounting n°1 INFINITE HEATSINK
Mounting n°2 PRINTED CIRCUIT

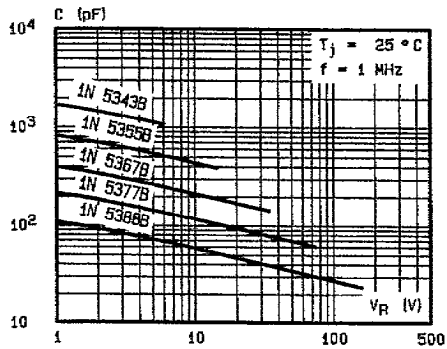
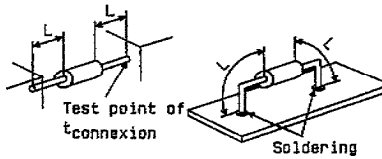


Fig.4 - Capacitance versus reverse applied voltage.

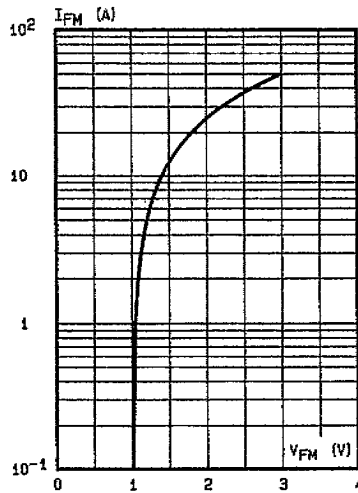


Fig.5 - Peak forward current versus peak forward voltage drop (typical values).

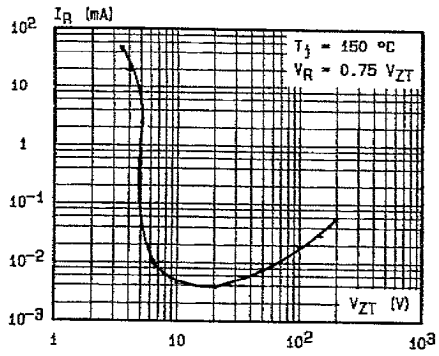


Fig.8 - Reverse current versus regulation voltage (typical values).

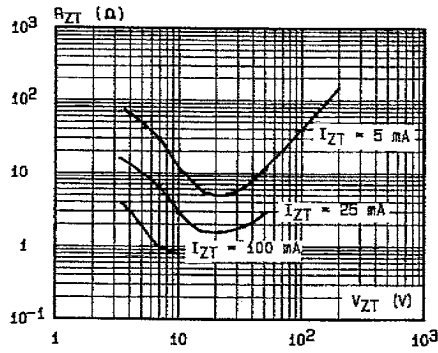


Fig.7 - Differential resistance versus regulation voltage (typical values).

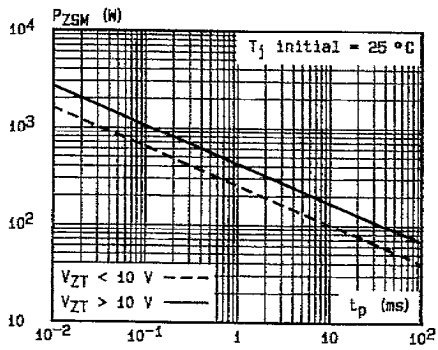


Fig.8 - Peak pulse power versus pulse duration (rectangular wave form) (maximum values).

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.