


1N5391GP THRU 1N5399GP

GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 50 to 1000 Volts

Forward Current - 1.5 Amperes

PATENTED*

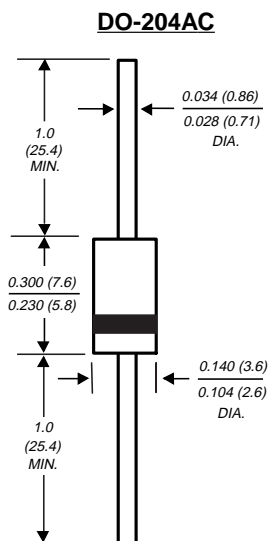

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation technique is covered by Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306



FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 1.5 Ampere operation at $T_A=70^\circ\text{C}$ with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, $0.375''$ (9.5mm) lead length, 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: JEDEC DO-204AC molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.015 ounce, 0.4 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	1N53 91GP	1N53 92GP	1N53 93GP	1N53 94GP	1N53 95GP	1N53 96GP	1N53 97GP	1N53 98GP	1N53 99GP	UNITS
* Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	Volts
* Maximum RMS voltage	V_{RMS}	35	70	140	210	280	350	420	560	700	Volts
* Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	500	600	800	1000	Volts
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_L=70^\circ\text{C}$	$I_{(AV)}$	1.5									Amps
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0									Amps
* Maximum instantaneous forward voltage at 1.5A, $T_A=70^\circ\text{C}$	V_F	1.4									Volts
*Maximum DC reverse current at rated DC blocking voltage	I_R	$T_A=25^\circ\text{C}$: 5.0 $T_A=150^\circ\text{C}$: 300.0									μA
* Maximum full load reverse current full cycle average, 0.375" (9.5mm) lead length at $T_A=70^\circ\text{C}$	$I_{R(AV)}$	300.0									μA
Typical reverse recovery time (NOTE 1)	t_{rr}	2.0									μs
Typical junction capacitance (NOTE 2)	C_J	15.0									pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	45.0									$^\circ\text{C}/\text{W}$
*Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175									$^\circ\text{C}$

NOTES:

- (1) Reverse recovery test condition: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
 - (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
 - (3) Thermal resistance from junction to ambient at $0.375''$ (9.5mm) lead length, P.C.B. mounted
- * JEDEC registered values

RATINGS AND CHARACTERISTIC CURVES 1N5391GP THRU 1N5399GP

FIG. 1 - FORWARD CURRENT DERATING CURVE

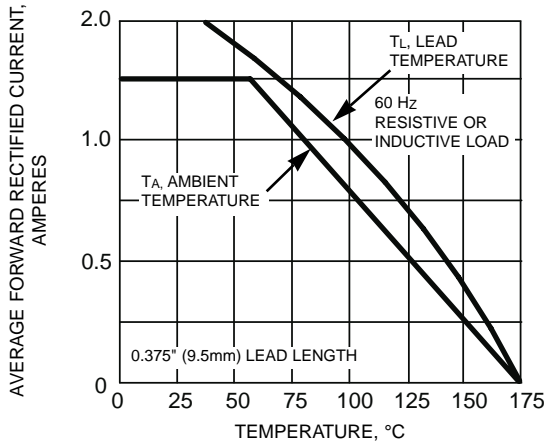


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

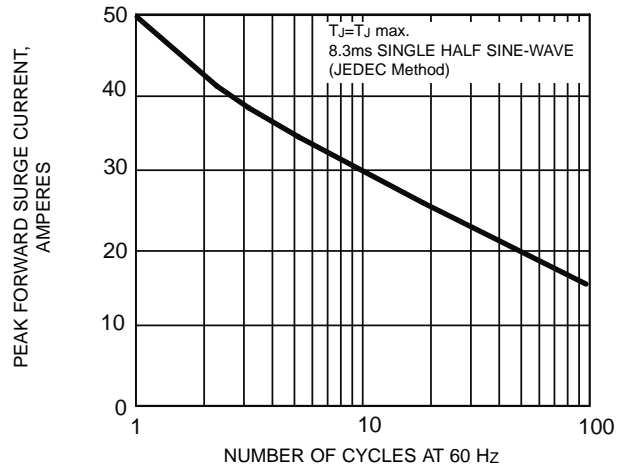


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

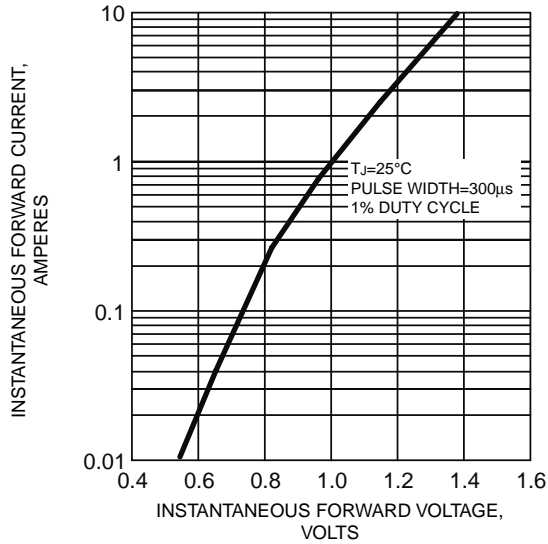


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

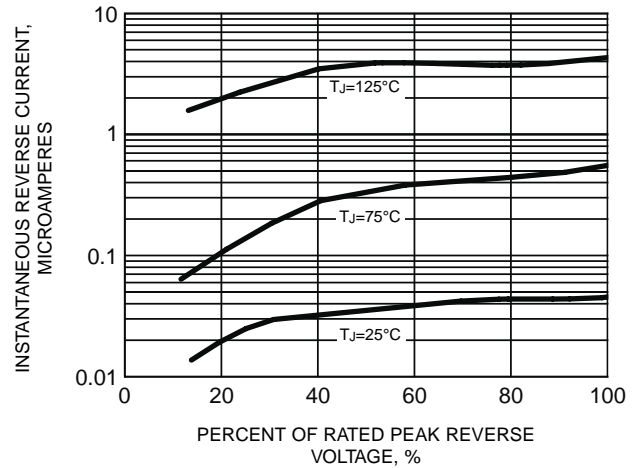


FIG. 5 - TYPICAL JUNCTION CAPACITANCE


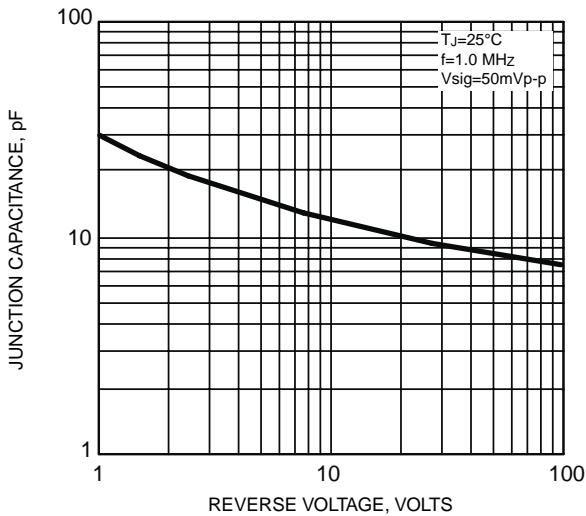


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE



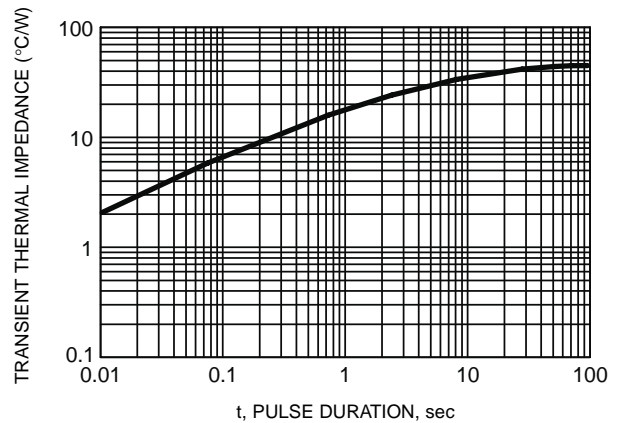

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.