



Single-Phase Bridge Rectifier

Reverse Voltage 50 and 1000 V

Forward Current 8.0 A



Case Style KBU

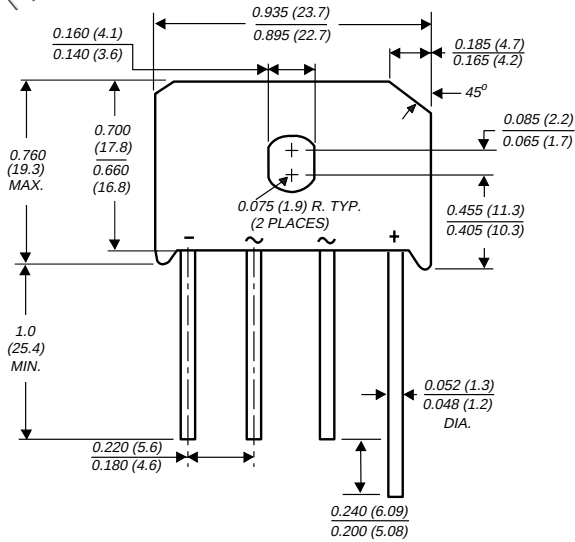

Dimensions in inches and (millimeters)

Features

- Plastic material used carries Underwriters Laboratory Flammability Classification 94V-0
- This series is UL listed under the Recognized Component Index, file number E54214
- High case dielectric strength of 1500 VRMS
- Ideal for printed circuit boards
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375 (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Mounting Position: Any (NOTE 1)

Mounting Torque: 5 in. -lb. max.

Weight: 0.3 ounce, 8.0 grams

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	KBU 8A	KBU 8B	KBU 8D	KBU 8G	KBU 8J	KBU 8K	KBU 8M	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at T _C =100°C (NOTE 1,3) T _A =45°C (NOTE 2)	I _{F(AV)}	8.0 6.0							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) T _J =150°C	I _{FSM}	300							A
Typical thermal resistance per leg (NOTE 2) (NOTE 3)	R _{θJA} R _{θJC}	18 3.0							°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-50 to +150							°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	KBU 8A	KBU 8B	KBU 8D	KBU 8G	KBU 8J	KBU 8K	KBU 8M	UNITS
Maximum instantaneous forward drop per leg at 8.0 A	V _F	1.0							V
Maximum DC reverse current at rated DC blocking voltage per leg T _A = 25°C T _A =125°C	I _R	10 1.0							μA mA

Notes:

- (1) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw
- (2) Units mounted in free air, no heatsink, P.C.B. at 0.375" (9.5mm) lead length with 0.5 x 0.5" (12 x 12mm) copper pads
- (3) Units mounted on a 3.0 x 3.0" x 0.11" thick (7.5 x 7.5 x 0.3cm) Al. Plate heatsink

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG. 1 - DERATING CURVE OUTPUT RECTIFIED CURRENT

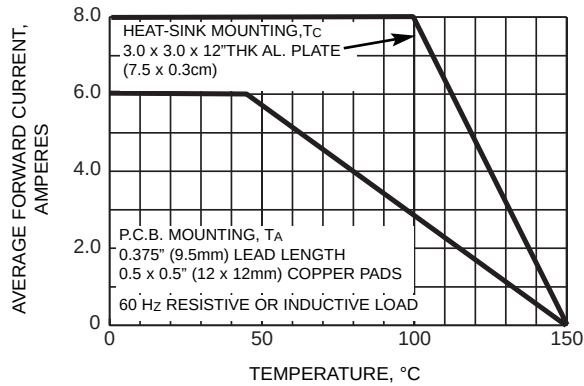


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

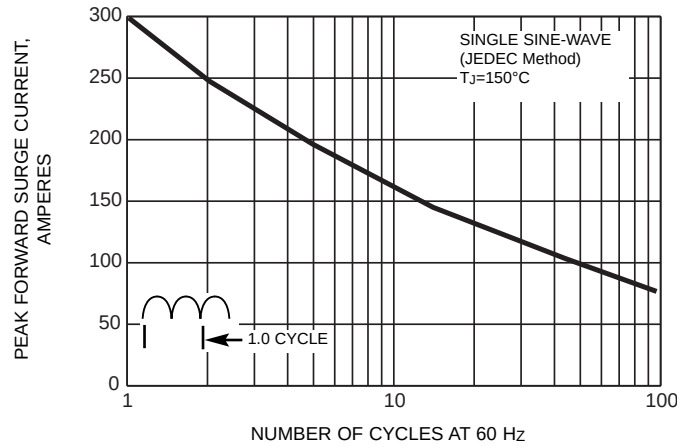


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

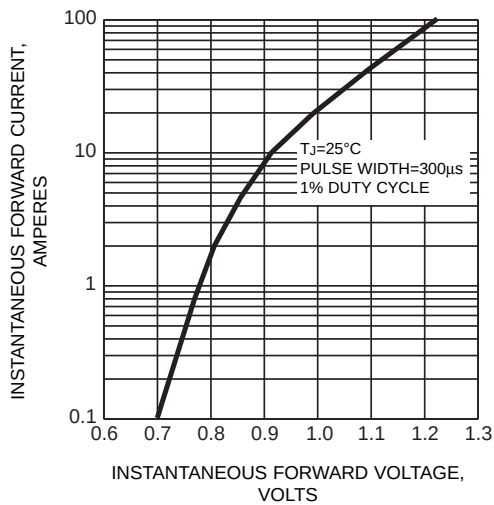


FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

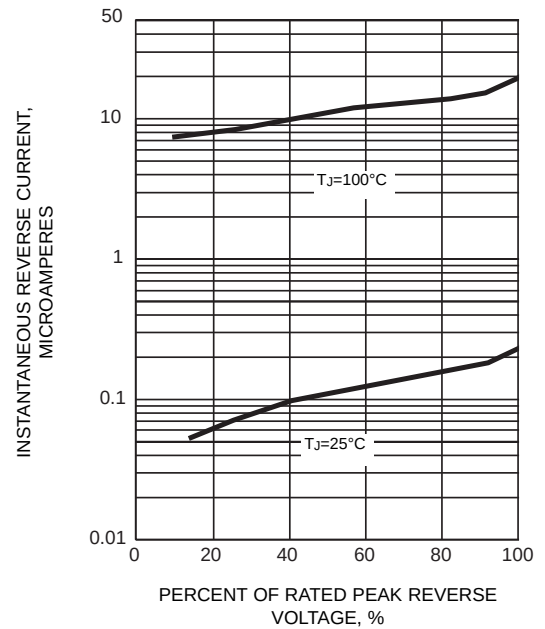


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

