


1N4245GP THRU 1N4249GP

GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 200 to 1000 Volts

Forward Current - 1.0 Ampere

PATENTED *

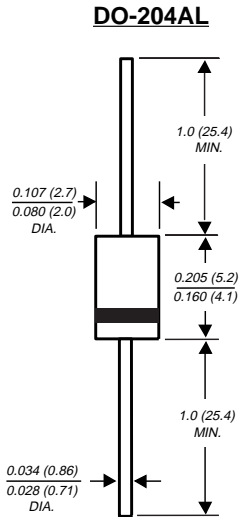

NOTE: Lead diameter is $\frac{0.026 (0.66)}{0.023 (0.58)}$ for suffix "E" part numbers

Dimension in inches and (millimeters)

* Glass-plastic technique is covered by

Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306

SUPERRECTIFIER®

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 1.0 Ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- ◆ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: JEDEC DO-204AL molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.012 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	1N 4245GP	1N 4246GP	1N 4247GP	1N 4248GP	1N 4249GP	UNITS
* Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	Volts
* Maximum RMS voltage	V_{RMS}	140	280	420	560	700	Volts
* Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	Volts
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	1.0					Amp
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25.0					Amps
* Maximum instantaneous forward voltage at 1.0A	V_F	1.2					Volts
* Maximum full load reverse current full cycle average 0.375" (9.5mm) lead length $T_A=55^\circ\text{C}$	$I_{R(AV)}$	50.0					μA
* Maximum reverse current at rated $T_A=25^\circ\text{C}$ DC blocking voltage $T_A=125^\circ\text{C}$	I_R	1.0 25.0					μA
Typical junction capacitance (NOTE 1)	C_J	8.0					pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$ $R_{\theta JL}$	55.0 25.0					$^\circ\text{C}/\text{W}$
* Operating junction temperature range	T_J	-65 to +160					$^\circ\text{C}$
* Storage temperature range	T_{STG}	-65 to +175					$^\circ\text{C}$







NOTES:

(1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(2) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted

* JEDEC registered values

RATINGS AND CHARACTERISTIC CURVES 1N4245GP THRU 1N4249GP

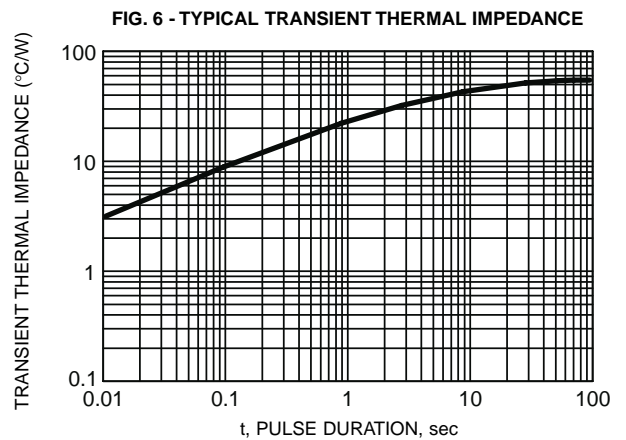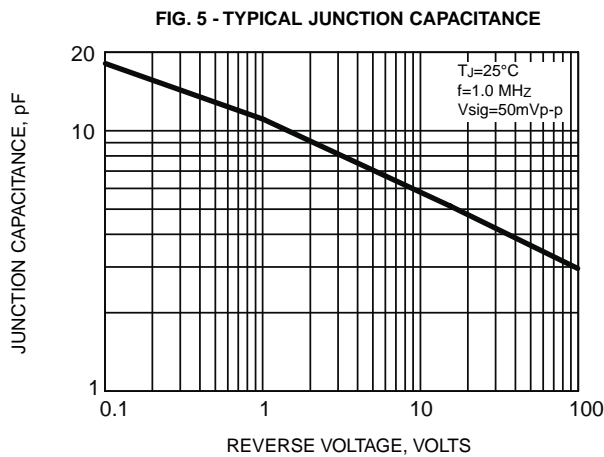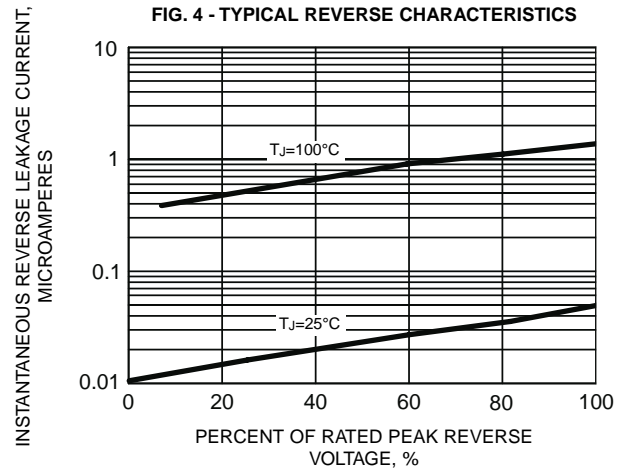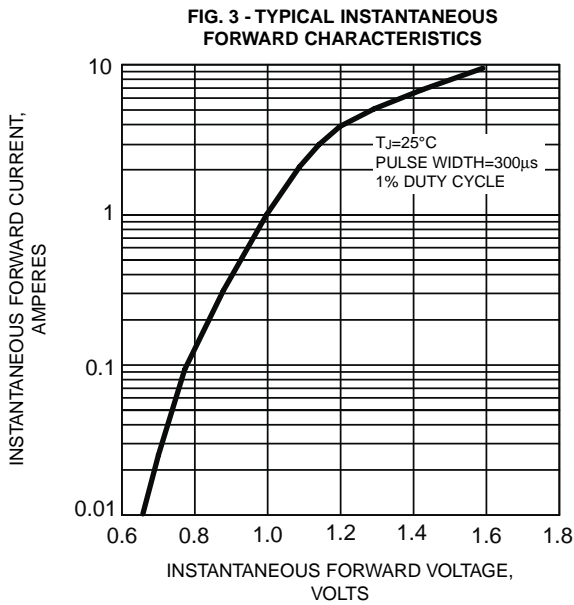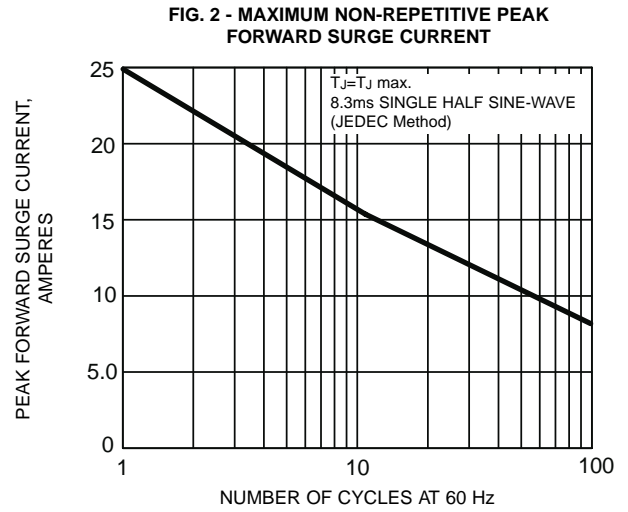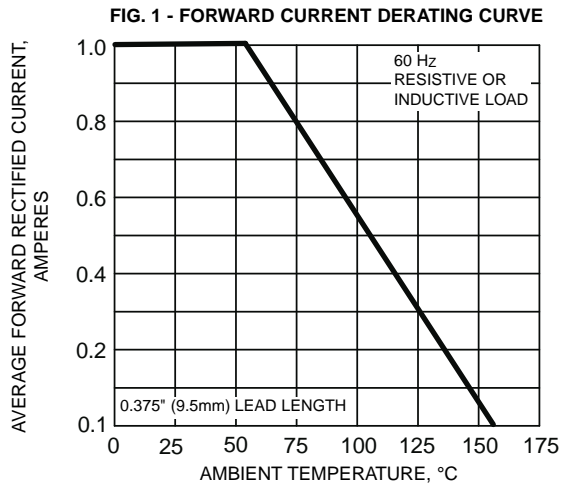



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.