


MECHANICAL DATA

Dimensions in mm (inches)

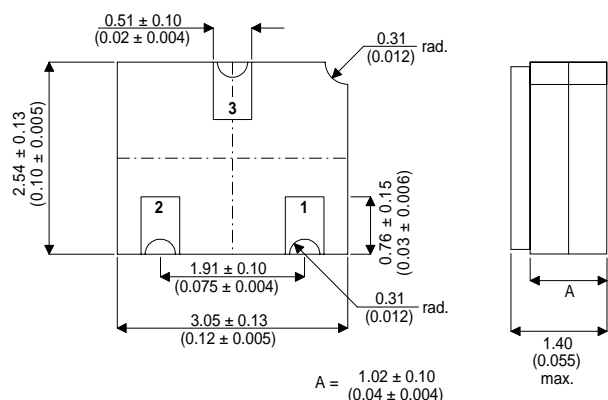

SOT23 CERAMIC (LCC1 PACKAGE)

Underside View

PAD 1 — Anode PAD 2 — Not Connected PAD 3 — Cathode

SILICON EPITAXIAL PLANAR DIODE

General Purpose and
Switching Diode in
Hermetic Ceramic Surface Mount
Package for
High Reliability Applications

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _R	Reverse Voltage			100	V
V _R RM	Repetitive Peak Reverse Voltage			100	V
I _{F(AV)}	Average Rectified Forward Current			150	mA
I _F	Forward Current			200	mA
I _{FRM}	Repetitive Peak Forward Current			450	mA
I _{FSM}	Non-Repetitive Peak Forward Current	t = 1μs		2000	mA
		t = 1s		500	
P _{tot}	Power Dissipation at T _{amb} = 25 °C			500	mW

CHARACTERISTICS (T_{case} = 25°C unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _F	Forward Voltage			1	V
I _R	Reverse Current			25	nA
		V _R = 20V		50	μA
V _{(BR)R}	Reverse Avalanche Breakdown Voltage	I _R = 100μA	100		V
		I _R = 5μA	100		V
C _d	Capacitance			4	pF
V _{fr}	Forward Recovery Voltage			2.5	V
t _{rr}	Reverse Recovery Time	I _F = 10mA to I _R = 60mA		4	ns
		R _L = 100Ω			



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.