


## MECHANICAL DATA

Dimensions in mm (inches)

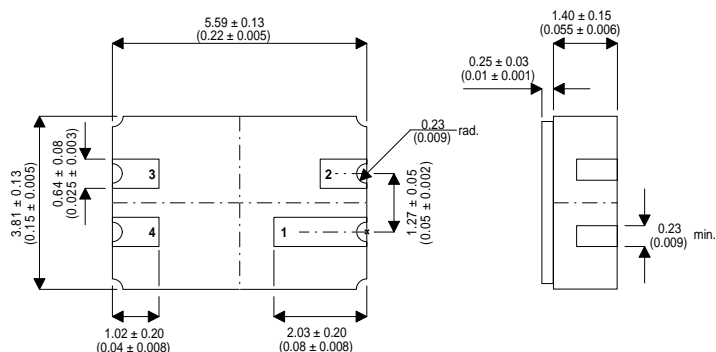

**(LCC3 PACKAGE)**  
**Underside View**

PAD 1 — Cathode                      PAD 3 — No Connection  
PAD 2 — No Connection              PAD 4 — Anode

## GENERAL PURPOSE SILICON RECTIFIER DIODE

General Purpose Rectifier Diode  
In Hermetic Ceramic Surface Mount Package  
For High Reliability Applications

## ABSOLUTE MAXIMUM RATINGS ( $T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_R$	Reverse Voltage			200	V
$V_{RRM}$	Peak Reverse Voltage			200	V
$I_{F(AV)}$	Average Half Wave Rectified Forward Current			$T_{amb} \leq 25^{\circ}C$	1.0
				$T_{amb} = 100^{\circ}C$	0.75
$I_F$	D.C Forward Current			1	A
$I_{FRM}$	Repetitive Peak Forward Current			10	A
$I_{FSM}$	Non-Repetitive Peak Forward Current	(half cycle surge , 60 c.p.s)		30	A

$T_{stg}$	Storage Temperature Range	-55 to +175 °C
$T_j$	Max junction temperature	+150°C

## CHARACTERISTICS ( $T_{case} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_F$	Forward Voltage Drop			1.1	V
$V_{F(AV)}$	Full-Cycle average forward voltage drop			0.8	V
$I_R$	Reverse Current			$V_R = 50 V, T_{amb} = 25^{\circ}C$	10
				$V_R = 50 V, T_{amb} = 100^{\circ}C$	50
$I_{R(AV)}$	Full cycle average reverse current			30	$\mu A$



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.