


BS108

DMOS Transistors (N-Channel)

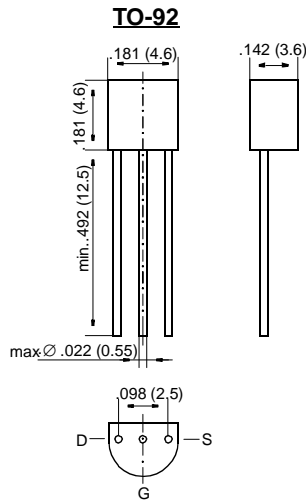

Dimensions in inches and (millimeters)

FEATURES

- ◆ High breakdown voltage
- ◆ High input impedance
- ◆ Low gate threshold voltage
- ◆ Low drain-source ON resistance
- ◆ High-speed switching
- ◆ No minority carrier storage time
- ◆ CMOS logic compatible input
- ◆ No thermal runaway
- ◆ No secondary breakdown
- ◆ Specially suited for telephone subsets



MECHANICAL DATA

Case: TO-92 Plastic Package

Weight: approx. 0.18 g

On special request, this transistor is also manufactured in the pin configuration TO-18.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

| | Symbol | Value | Unit |
|---|-----------|--------------------|------------------|
| Drain-Source Voltage | V_{DSS} | 240 | V |
| Drain-Gate Voltage | V_{DGS} | 240 | V |
| Gate-Source Voltage (pulsed) | V_{GS} | ± 20 | V |
| Drain Current (continuous) | I_D | 230 | mA |
| Power Dissipation at $T_{amb} = 25\text{ }^\circ\text{C}$ | P_{tot} | 0.83 ¹⁾ | W |
| Junction Temperature | T_j | 150 | $^\circ\text{C}$ |
| Storage Temperature Range | T_S | -65 to +150 | $^\circ\text{C}$ |

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case

Inverse Diode

| | Symbol | Value | Unit |
|---|--------|-------|------|
| Max. Forward Current (continuous) at $T_{amb} = 25\text{ }^\circ\text{C}$ | I_F | 0.75 | A |
| Forward Voltage Drop (typ.) at $V_{GS} = 0$, $I_F = 0.75\text{ A}$, $T_j = 25\text{ }^\circ\text{C}$ | V_F | 0.85 | V |

BS108

ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified


| | Symbol | Min. | Typ. | Max. | Unit |
|---|-------------------------------------|-------------|---------------|-------------------|--------------------------------|
| Drain-Source Breakdown Voltage at $I_D = 100 \mu\text{A}$, $V_{GS} = 0$ | $V_{(BR)DSS}$ | 240 | 250 | – | V |
| Gate-Body Leakage Current at $V_{GS} = 15 \text{ V}$, $V_{DS} = 0$ | I_{GSS} | – | – | 10 | nA |
| Drain Cutoff Current at $V_{DS} = 130 \text{ V}$, $V_{GS} = 0$ at $V_{DS} = 70 \text{ V}$, $V_{GS} = 0.2 \text{ V}$ | I_{DSS} I_{DSX} | – – | – – | 1 25 | μA μA |
| Gate-Source Threshold Voltage at $V_{GS} = V_{DS}$, $I_D = 1 \text{ mA}$ | $V_{GS(th)}$ | 0.8 | 1.5 | 2.5 | V |
| Drain-Source ON Resistance at $V_{GS} = 2.8 \text{ V}$, $I_D = 100 \text{ mA}$ | $R_{DS(ON)}$ | – | 5.5 | 8 | Ω |
| Thermal Resistance Junction to Ambient Air | R_{thJA} | – | – | 150 ¹⁾ | K/W |
| Capacitance at $V_{DS} = 20 \text{ V}$, $V_{GS} = 0$, $f = 1 \text{ MHz}$ Input Capacitance Output Capacitance Feedback Capacitance | C_{iSS} C_{oSS} C_{rSS} | – – – | 80 20 5 | – – – | pF pF pF |
| Switching Times at $V_{GS} = 10 \text{ V}$, $V_{DS} = 10 \text{ V}$, $R_D = 100 \Omega$ Turn-On Time Turn-Off Time | t_{on} t_{off} | – – | 5 50 | – – | ns ns |

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case

RATINGS AND CHARACTERISTIC CURVES BS108


Admissible power dissipation versus temperature

Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case

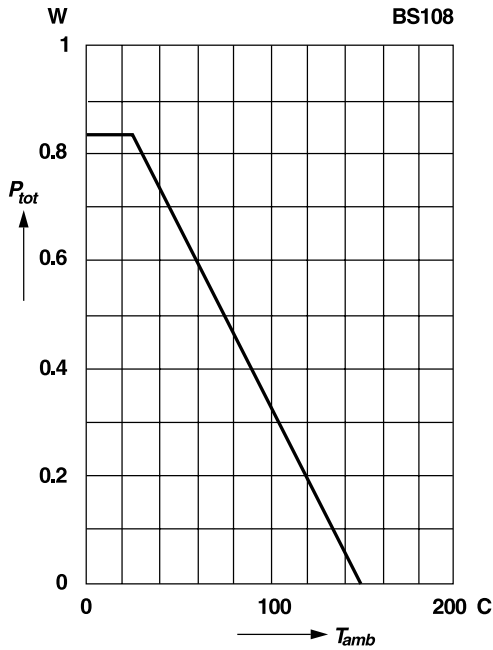


Output characteristics

Pulse test width 80 ms; pulse duty factor 1%

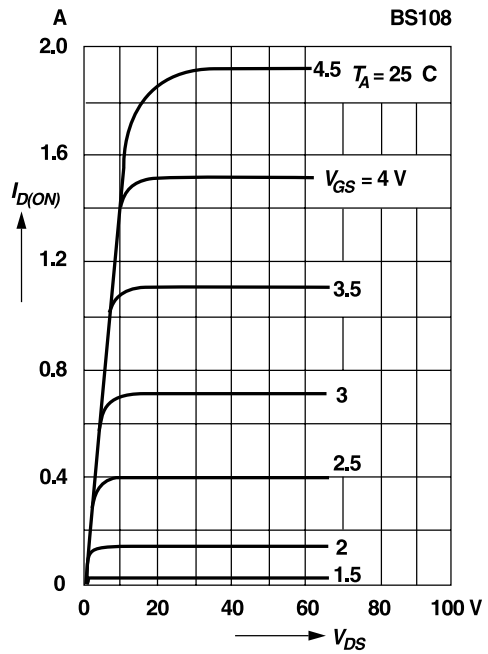


Saturation characteristics

Pulse test width 80 ms; pulse duty factor 1%

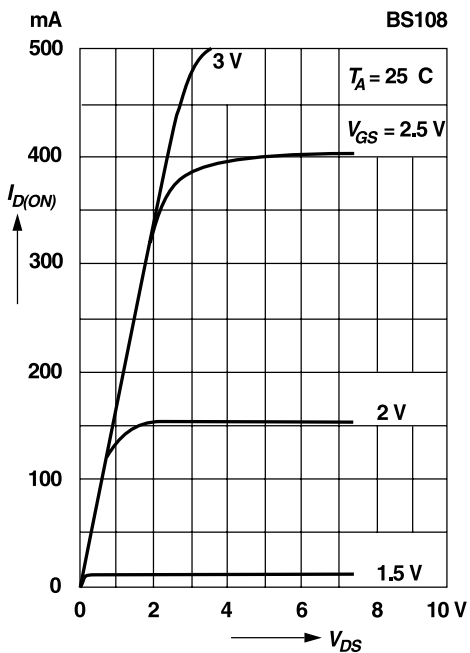


Drain-source current versus gate threshold voltage

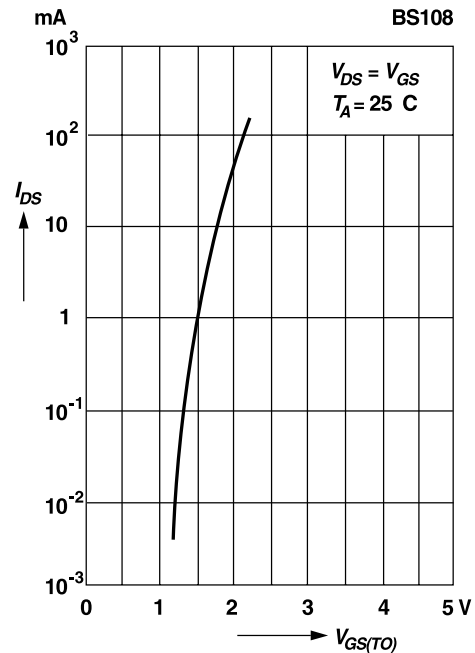


RATINGS AND CHARACTERISTIC CURVES BS108

Drain current versus gate-source voltage


Pulse test width 80 ms; pulse duty factor 1%

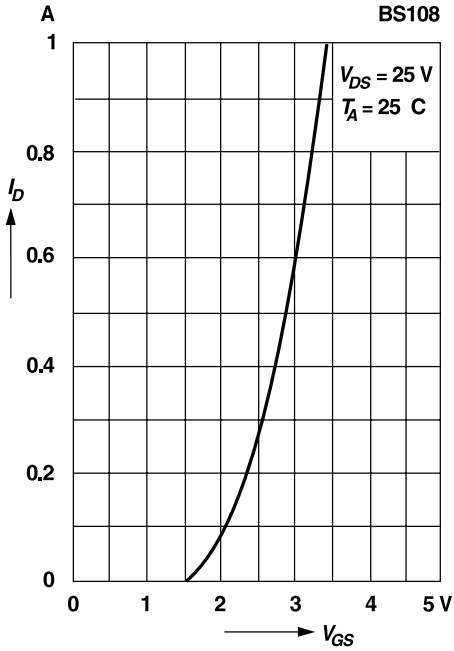


Normalized gate-source voltage versus temperature

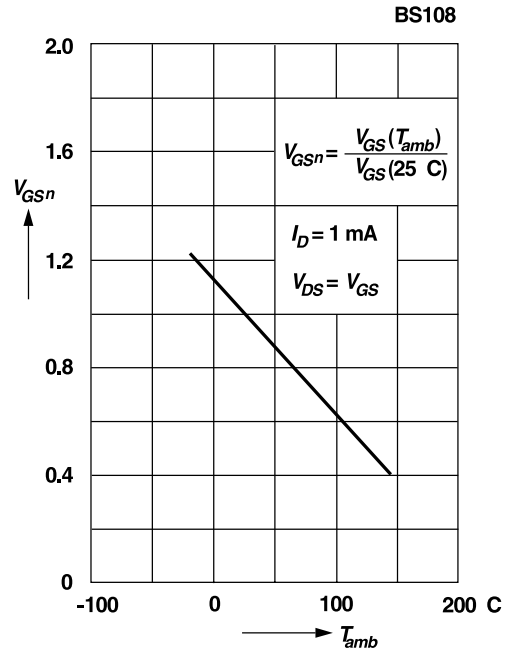

Normalized drain-source current versus temperature

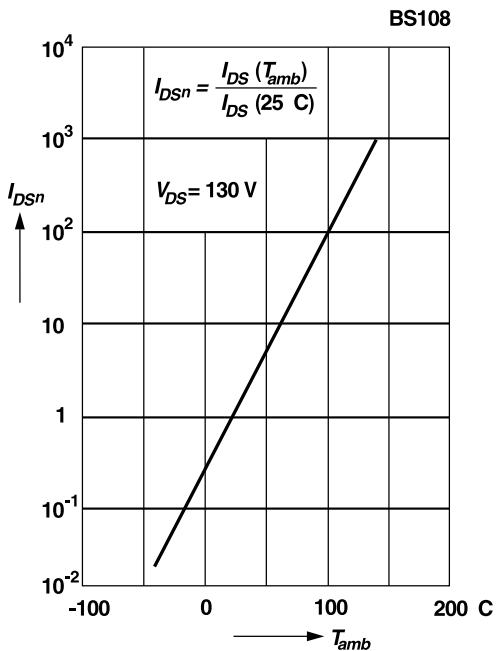


Normalized drain-source resistance versus temperature

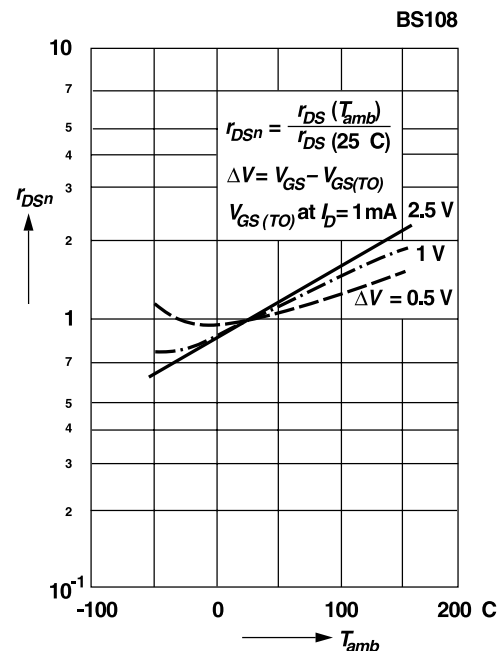


RATINGS AND CHARACTERISTIC CURVES BS108

**Drain-source resistance
versus gate-source voltage**

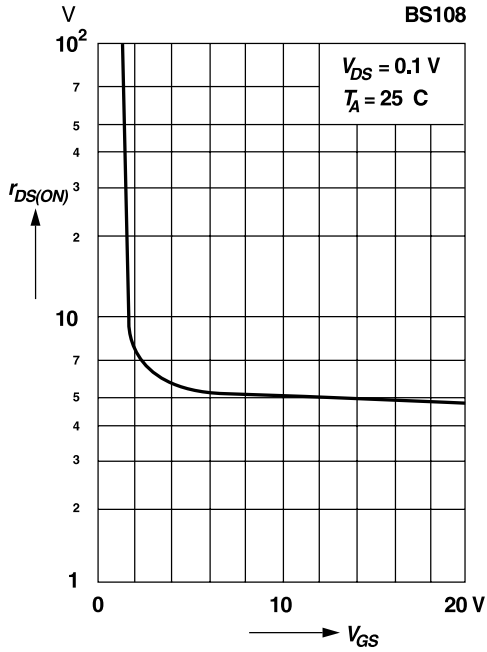


**Transconductance
versus gate-source voltage**

Pulse test width 80 ms; pulse duty factor 1%

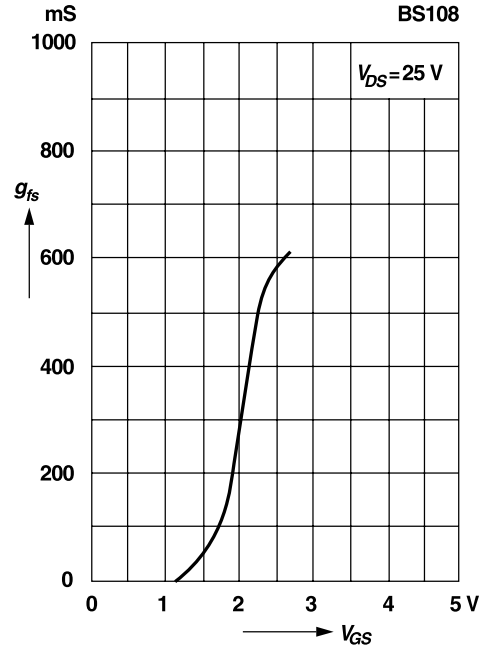

**Transconductance
versus drain current**

Pulse test width 80 ms; pulse duty factor 1%

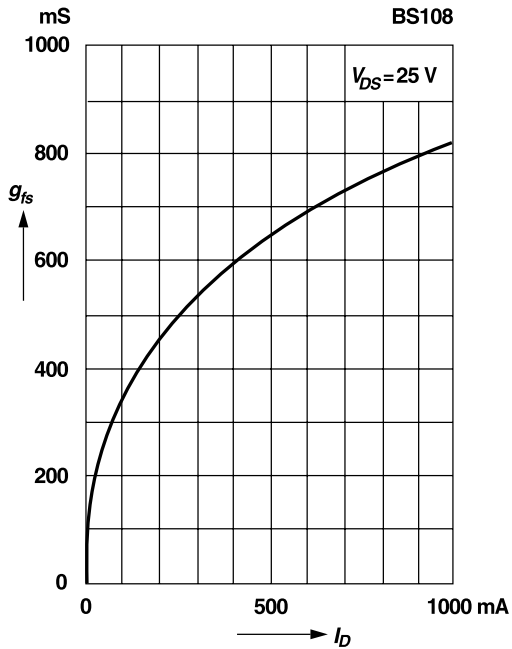



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.