


BS208

DMOS Transistors (P-Channel)

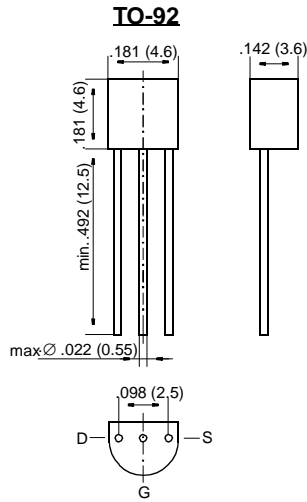

Dimensions in inches and (millimeters)

FEATURES

- ◆ High breakdown voltage
- ◆ High input impedance
- ◆ Low gate threshold voltage
- ◆ Low drain-source ON resistance
- ◆ High-speed switching
- ◆ No minority carrier storage time
- ◆ CMOS logic compatible input
- ◆ No thermal runaway
- ◆ No secondary breakdown
- ◆ Specially suited for telephone subsets



MECHANICAL DATA

Case: TO-92 Plastic Package

Weight: approx. 0.18 g

On special request, this transistor is also manufactured in the pin configuration TO-18.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DSS}$	240	V
Drain-Gate Voltage	$-V_{DGS}$	240	V
Gate-Source Voltage (pulsed)	V_{GS}	± 20	V
Drain Current (continuous)	$-I_D$	200	mA
Power Dissipation at $T_{amb} = 25\text{ }^\circ\text{C}$	P_{tot}	0.83 ¹⁾	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_S	-65 to +150	$^\circ\text{C}$

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case.

Inverse Diode

	Symbol	Value	Unit
Max. Forward Current (continuous) at $T_{amb} = 25\text{ }^\circ\text{C}$	I_F	0.75	A
Forward Voltage Drop (typ.) at $V_{GS} = 0$, $I_F = 0.75\text{ A}$, $T_j = 25\text{ }^\circ\text{C}$	V_F	0.85	V

BS208

ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified


	Symbol	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage at $-I_D = 100 \mu\text{A}$, $V_{GS} = 0$	$-V_{(BR)DSS}$	240	250	–	V
Gate-Body Leakage Current at $-V_{GS} = 15 \text{ V}$, $V_{DS} = 0$	$-I_{GSS}$	–	–	10	nA
Drain Cutoff Current at $-V_{DS} = 130 \text{ V}$, $V_{GS} = 0$ at $-V_{DS} = 70 \text{ V}$, $-V_{GS} = 0.2 \text{ V}$	$-I_{DSS}$ $-I_{DSX}$	– –	– –	1 25	μA μA
Gate-Source Threshold Voltage at $V_{GS} = V_{DS}$, $-I_D = 1 \text{ mA}$	$-V_{GS(th)}$	0.8	1.5	2.5	V
Drain-Source ON Resistance at $-V_{GS} = 5 \text{ V}$, $-I_D = 100 \text{ mA}$	$R_{DS(ON)}$	–	7	14	Ω
Thermal Resistance Junction to Ambient Air	R_{thJA}	–	–	150 ¹⁾	K/W
Capacitances at $-V_{DS} = 20 \text{ V}$, $V_{GS} = 0$, $f = 1 \text{ MHz}$ Input Capacitance Output Capacitance Feedback Capacitance	C_{iss} C_{oss} C_{rss}	– – –	200 30 10	– – –	pF pF pF
Switching Times at $-I_D = 200 \text{ mA}$, $-U_{GS} = 10 \text{ V}$ Turn-on Time Fall Time	t_{on} t_f	– –	5 15	– –	ns ns

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case.

RATINGS AND CHARACTERISTIC CURVES BS208


Admissible power dissipation versus temperature

Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case

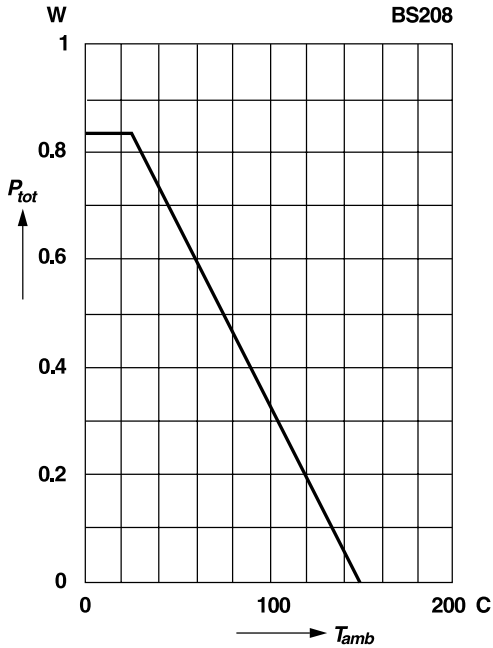


Output characteristics

Pulse test width 80 ms; pulse duty factor 1%

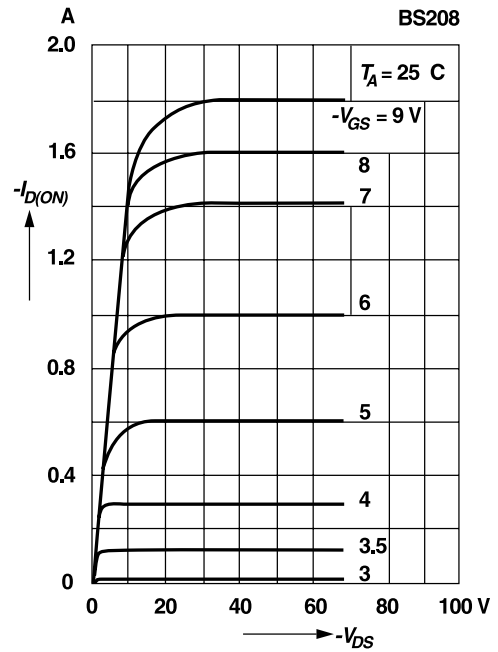


Saturation characteristics

Pulse test width 80 ms; pulse duty factor 1%

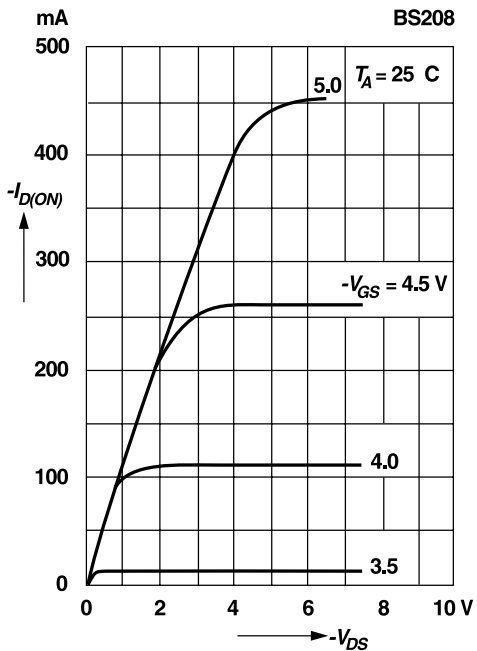


Drain-source current versus gate threshold voltage

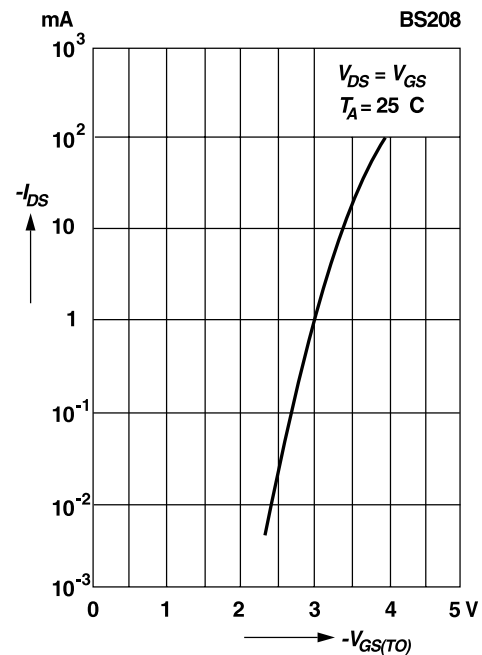


RATINGS AND CHARACTERISTIC CURVES BS208

Drain current versus gate-source voltage


Pulse test width 80 ms; pulse duty factor 1%

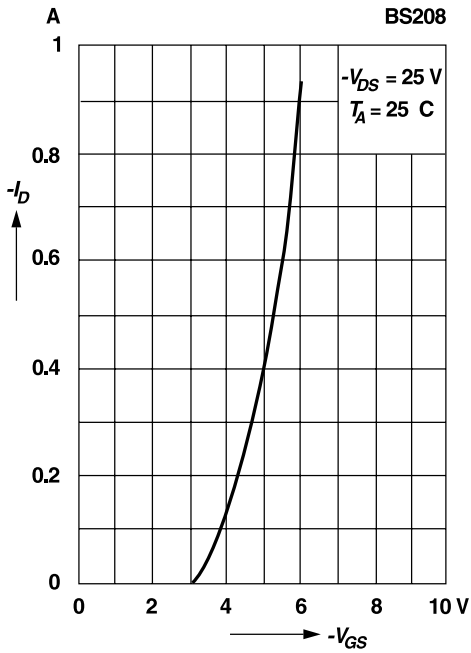


Normalized gate-source voltage versus temperature

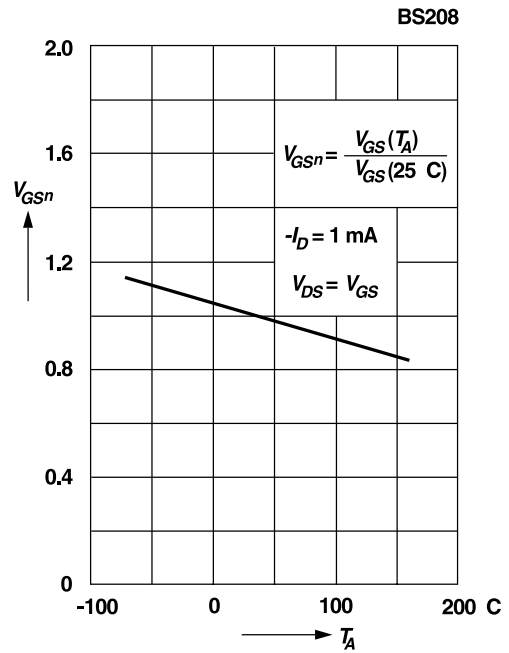

Normalized drain-source current versus temperature

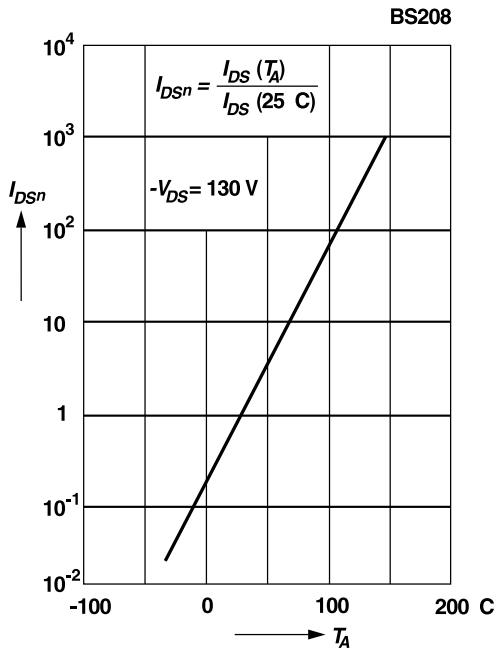


Normalized drain-source resistance versus temperature

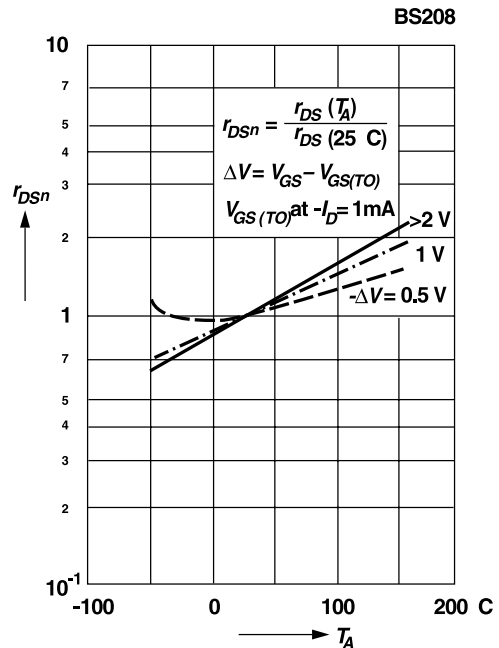


RATINGS AND CHARACTERISTIC CURVES BS208

Drain-source resistance versus gate-source voltage

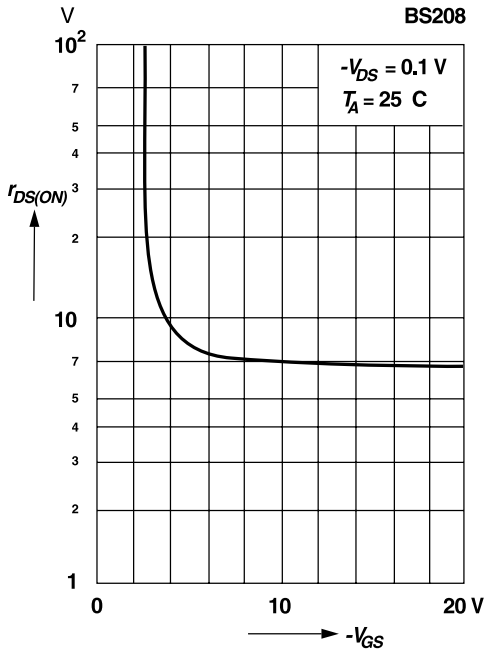


Transconductance versus gate-source voltage

Pulse test width 80 ms; pulse duty factor 1%

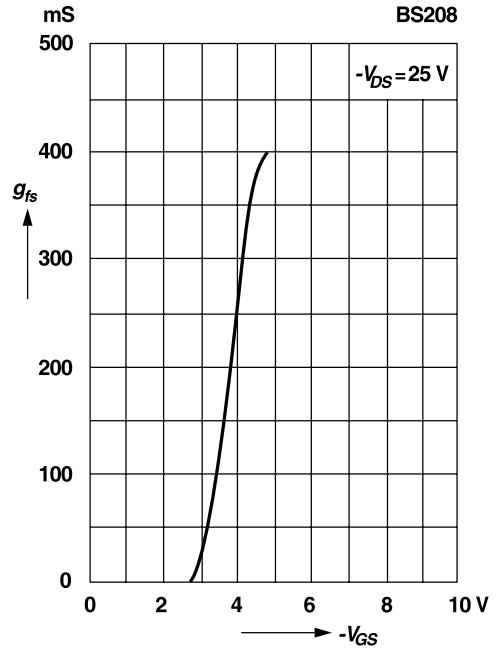


Transconductance versus drain current

Pulse test width 80 ms; pulse duty factor 1%

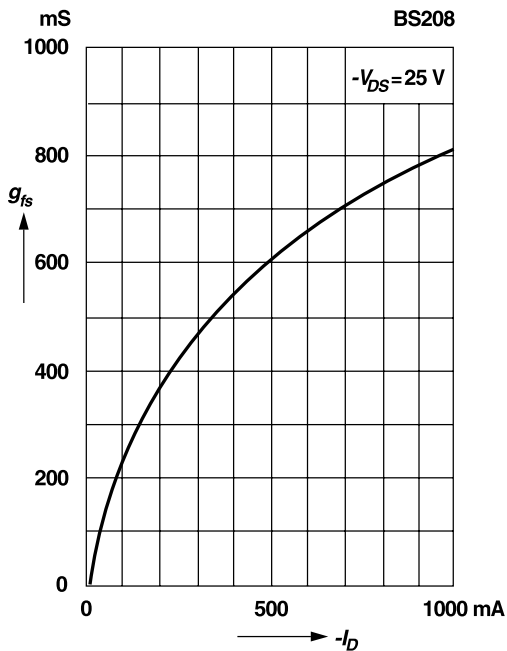

Capacitance versus drain-source voltage

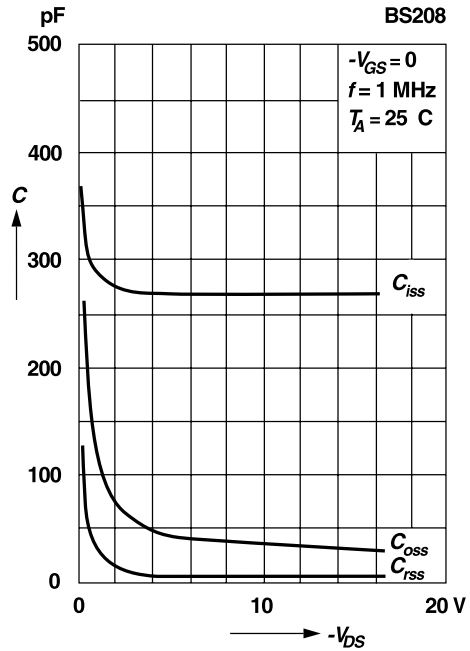



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.