

HIGH VOLTAGE POWER TRANSISTOR

The BU326 and BU326A Type are a fast switching high voltage transistor, more specially intended for operating in color TV receivers chopper supplies.

FEATURES:

- * Collector-Emitter Sustaining Voltage -
 $V_{CE(sus)} = 375 \text{ V (Min.) - BU326}$
 $= 400 \text{ V (Min.) - BU326A}$
- * Low Collector-Emitter Saturation Voltage -
 $V_{CE(sat)} = 1.5 \text{ V (Max.) @ } I_C = 2.5 \text{ A, } I_B = 0.5 \text{ A}$

Boca Semiconductor Corp.

BSC


<http://www.bocasemi.com>

NPN
BU326
BU326A


6 AMPERE
POWER
TRANSISTORS
375-400 VOLTS
75 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	BU326	BU326A	Unit
Collector-Emitter Voltage	V_{CEO}	375	400	V
Collector-Base Voltage	V_{CBO}	800	900	V
Emitter-Base Voltage	V_{EBO}	10		V
Collector Current - Continuous - Peak	I_C	6.0 8.0		A
Base Current - Continuous	I_B	3.0		A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	75 0.428		W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	- 65 to +200		$^\circ\text{C}$




TO-3

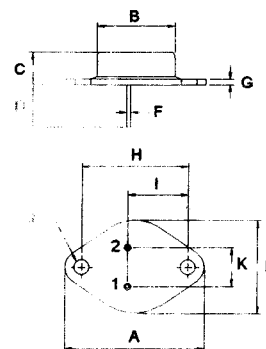

PIN 1. BASE
 2. EMITTER
 COLLECTOR(CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	2.33	$^\circ\text{C/W}$

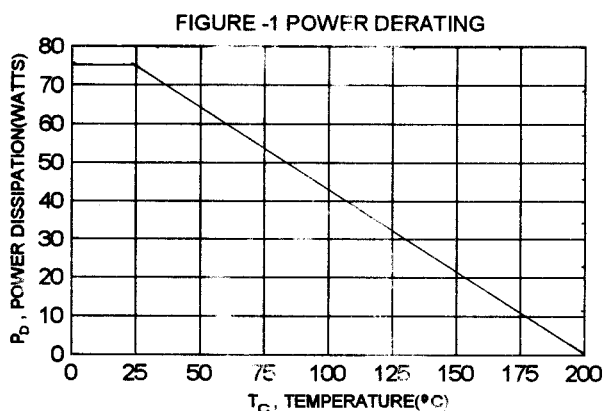

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_C = 100\text{ mA}$, $I_B = 0$)	BU326 BU326A	$V_{CE(sus)}$	375 400	V
Collector Cutoff Current ($V_{CE} = 800\text{ V}$, $V_{BE} = 0$) ($V_{CE} = 900\text{ V}$, $V_{BE} = 0$)	BU326 BU326A	I_{CES}	1.0 1.0	mA
Emitter Cutoff Current ($V_{EB} = 10\text{ V}$, $I_C = 0$)		I_{EBO}	10	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 1.0\text{ A}$, $V_{CE} = 5.0\text{ V}$)		hFE	25(typ)	
Collector - Emitter Saturation Voltage ($I_C = 2.5\text{ A}$, $I_B = 0.5\text{ A}$) ($I_C = 4.0\text{ A}$, $I_B = 1.25\text{ A}$)		$V_{CE(sat)}$	1.5 3.0	V
Base - Emitter Saturation Voltage ($I_C = 2.5\text{ A}$, $I_B = 0.5\text{ A}$) ($I_C = 4.0\text{ A}$, $I_B = 1.25\text{ A}$)		$V_{BE(sat)}$	1.4 1.6	V

DYNAMIC CHARACTERISTICS


Current Gain - Bandwidth Product ($I_C = 0.2\text{ A}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ MHz}$)		f_T	4.0	MHz
--	--	-------	-----	-----

SWITCHING CHARACTERISTICS


Turn On Time	$V_{CC} = 250\text{ V}$, $I_C = 2.5\text{ A}$ $I_{B1} = 0.5\text{ A}$, $I_{B2} = -1\text{ A}$	t_{on}	0.5	us
Storage Time		t_s	3.5	us
Fall Time		t_f	0.5	us

(1) Pulse Test: Pulse width $\leq 300\text{ us}$, Duty Cycle $\leq 2.0\%$


DC CURRENT GAIN

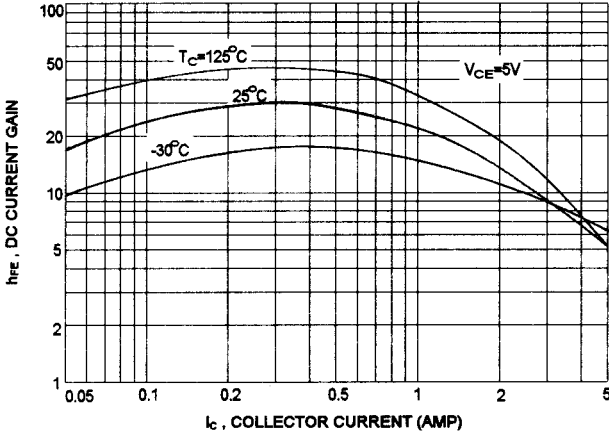


COLLECTOR SATURATION REGION

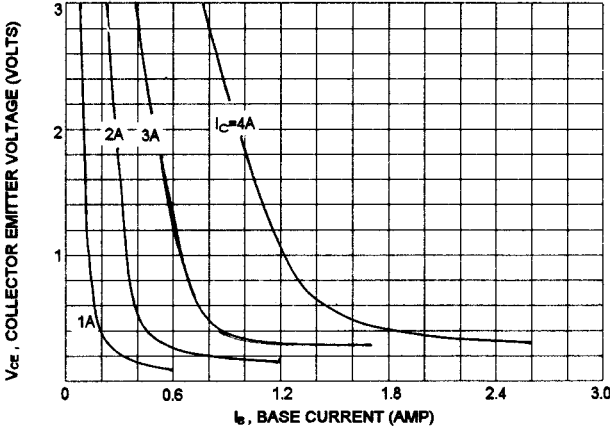


BASE-EMITTER VOLTAGE

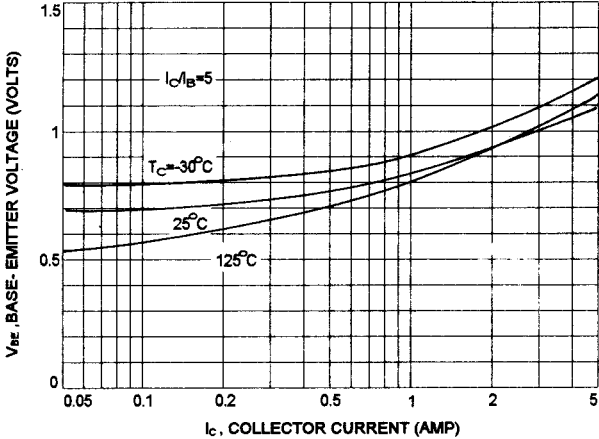


COLLECTOR-EMITTER VOLTAGE

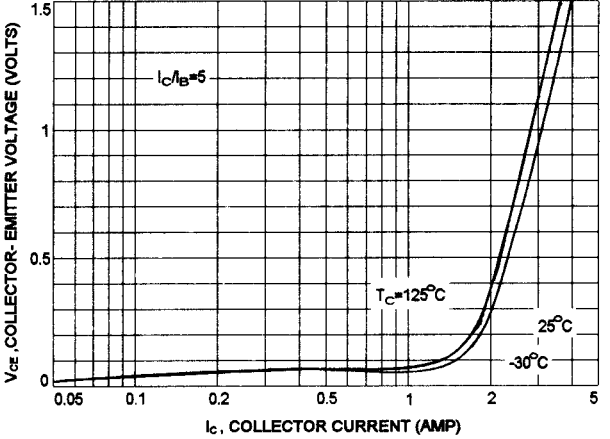

SWITCHING TIME

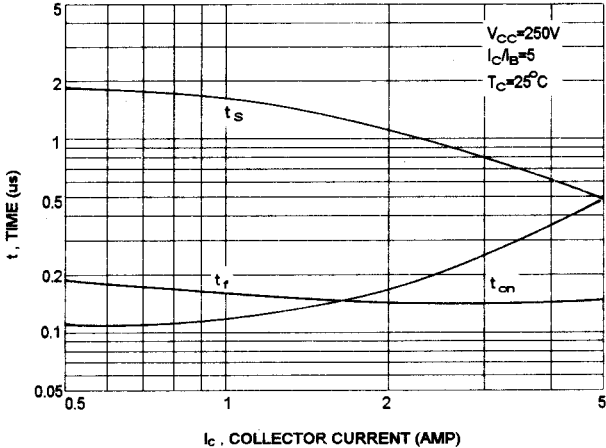

SAFE OPERATING AREA

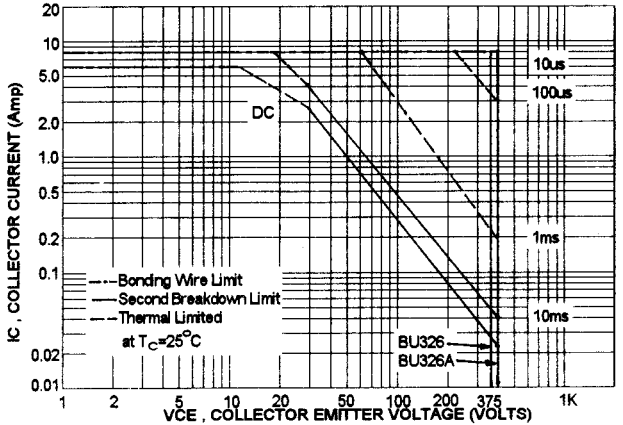



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.