

## 6700 Series Thermostats

### 6700 P.C. Board Thermostat



The Airpax Series 6700 is a miniature bimetallic snap acting thermostat which provides accurate and reliable sensing

and switching in a single device. Primarily developed for thermal management applications on power supplies, the Series 6700 is also ideally suited for use on crowded P.C. boards. It provides fast, positive response and excellent repeatability with 1 amp switching capability at 48 VDC over its operating temperature range of 40°C to 110°C (104°F to 230°F). The operating temperature is pre-set at the factory and is non-adjustable in the field.

The single pole/single throw switch assembly features a bimetallic element that is rated 100,000 cycles at 5 VDC 20 mA resistive or in excess of 1,000,000 operations mechanically. This unit features a positive snap action, available in either normally closed, open on rising temperature or normally open, close on rising temperature.

The 6700 thermostat dimensionally conforms to the international product package standard Y220/T0220. Thus, the 6700 may be automatically placed and soldered onto P.C. boards with high speed automated equipment, eliminating the need for the expensive hand placement and termination required today for most power supply thermostats.

The nickel-plated copper mounting bracket allows this device to be directly mounted to the heat sink to

sense an over-temperature condition caused by other components mounted close by or insufficient cooling due to external conditions.

Typical uses include turning on an indicator light, sounding an audible alarm, switching on a control circuit to send a message to a display screen or even switching a circuit to shut down a system. Applications include computers and computer peripherals, aircraft, automotive, and test equipment.

### Specifications:

**Contact Resistance:** 50 Milliohms max. (before and after rated life)

### Contact Ratings:



Cycles	Voltage	Amps (Resistive)
30,000	48 VDC	1
30,000	120 VAC	1
100,000	5 VDC	.020
100,000	5 VDC	.001


**Contact Operations:** Either open on rise or close on rise

**Operating Temperature Range:** 40°C (104°F) to 110°C (230°F)

**Standard Operating Temperature Tolerance:** ±5°C (±9°F) Nominal operating temperature settings in 5°C (9°F) increments

**US Patent No:** 4,795,997

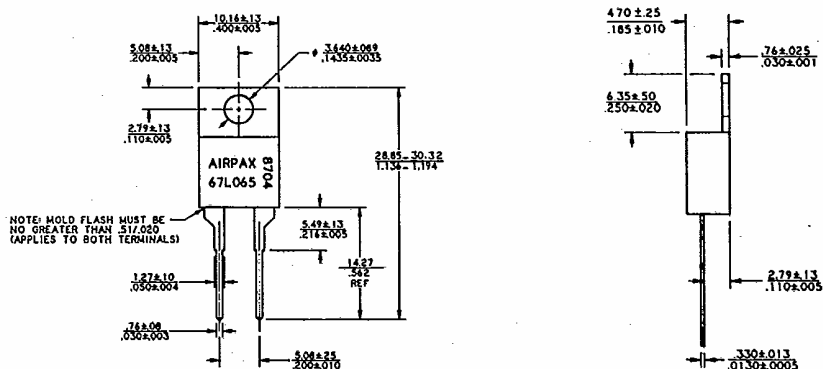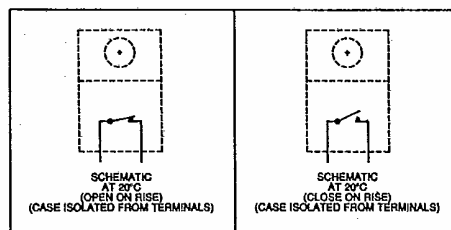

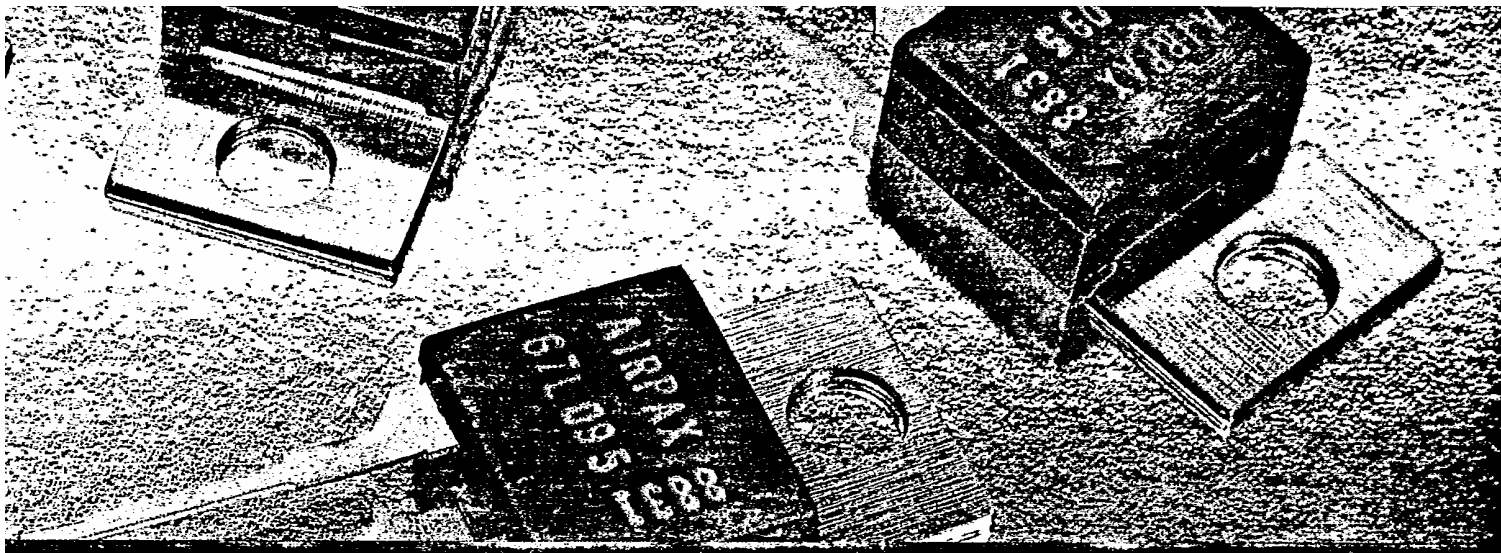

## 6700 Series Thermostats

**Short Term Exposure Limit:**  
260°C (500°F), 10 sec.

**Long Term Exposure Limit:**  
-55°C (-67°F) to 160°C (320°F)

**Dielectric Strength:** 1480 VAC 60 Hz,  
1 second terminals to case

**Insulation Resistance:** 100 Megohms  
at 500 VDC

**Contact Bounce - make:** 3 ms max.

**Weight:** Approximately 0.5 grams

**Seal:** Epoxy sealed for wave soldering  
and cleaning. Moisture proof per Airpax  
Spec. S-722 (unit will not leak while  
submerged in 9" of water for a minimum  
of two minutes).

**Vibration:** Per Mil-Std-202,  
Method 204D, Test Condition D,  
10-2,000 Hz.

**Shock:** Per Mil-Std-202, Method 213,  
Test Condition C, 100 G's, 6 milliseconds,  
½ sine wave.

**Humidity:** Moisture resistant per  
Mil-Std-202F, Method 106E.

**Chemical Resistance:** Unit is resistant  
to water, salt, alcohol, ammonia,  
trichlorethane, and most other organic  
solvents.

**Solderability:** Terminal material is  
selectively striped with 60/40 solder for  
improved solderability.

**Resistance to Soldering Heat:**  
Per Mil-Std-202F, Method 210A,  
Test Condition E.

**Mechanical Life:** 1,000,000 operations.

**UL & CSA File Numbers:**  
UL Recognized E36687  
CSA Certified LR25561

### Materials:

**Seal:** High temperature epoxy

**Base:** PPS (Polyphenylene Sulfide),  
94 VO rated

**Terminals:** 65% Copper, 18% Nickel

**Contacts:** Gold-plated Silver cross bar

**Bracket:** Nickel-plated copper

6700 SERIES STANDARD CALIBRATIONS

OPERATE (±5°C)	RESET (MIN °C)	DIFFERENTIAL (MIN °C)
40	20	4
45	20	4
50	30	4
55	30	4
60	40	4
65	40	4
70	50	4
75	50	4
80	55	6
85	55	6
90	60	6
95	60	6
100	70	6
105	70	6
110	80	6

### How to use this chart

Each thermostat Part Number consists of functional "building blocks" to enable the user to specify clearly and precisely the desired characteristics in each category. Select the proper Code in each category, then transfer it to the box indicated. Unless a special requirement is indicated, the Part Number will be complete when the proper temperature is selected. If you have a special requirement, please call Airpax for a factory assigned number to complete the Part Number.

Example: A 67F060 thermostat will close (make contact) on a rising temperature from 55°C to 65°C and will reset (break contact) on a falling temperature no less than 4°C lower than the actual close temperature and no lower than 40°C actual temperature.

67     -

**Contact Operation:** \_\_\_\_\_

F = Fan (CLR)  
L = Limit (OPR)

Operating Temperature \_\_\_\_\_  
in Degrees C.

Factory Assigned \_\_\_\_\_  
Number for Special  
Requirements

Temperature set point calibration is checked at Airpax with precision test equipment and proven methods. Because customer checking methods may differ, a typical variance allowed for correlation is ±1 degree C.

# TEMPERATURE CONVERSION TABLE

If center column value is °F, the °C equivalent is to the left. If center column value is °C, the °F equivalent is to the right.

°C.	°F.	°C.	°F.	°C.	°F.	°C.	°F.	°C.	°F.	°C.	°F.	°C.	°F.							
-34.44	-30	-22	15.56	60	140	65.56	150	302	115.56	240	464	165.56	330	626	215.56	420	788	257.22	495	923
-33.89	-29	-20.2	16.11	61	141.8	66.11	151	303.8	116.11	241	465.8	166.11	331	627.8	216.11	421	789.8	257.78	496	924.8
-33.33	-28	-19.4	16.67	62	142.8	66.67	152	304.8	116.67	242	466.8	166.67	332	628.8	216.67	422	790.8	258.33	497	925.8
-32.78	-27	-18.6	17.22	63	143.8	67.22	153	305.8	117.22	243	467.8	167.22	333	629.8	217.22	423	791.8	258.89	498	926.8
-32.22	-26	-17.8	17.78	64	144.8	67.78	154	306.8	117.78	244	468.8	167.78	334	630.8	217.78	424	792.8	259.44	499	927.8
-31.67	-25	-17	18.33	65	145.8	68.33	155	307.8	118.33	245	469.8	168.33	335	631.8	218.33	425	793.8	260	500	928.8
-31.11	-24	-16.2	18.89	66	146.8	68.89	156	308.8	118.89	246	470.8	168.89	336	632.8	218.89	426	794.8	260.56	501	929.8
-30.56	-23	-15.4	19.44	67	147.8	69.44	157	309.8	119.44	247	471.8	169.44	337	633.8	219.44	427	795.8	261.11	502	930.8
-30	-22	-14.6	20	68	148.8	70	158	310.8	120	248	472.8	170	338	634.8	220	428	796.8	261.67	503	931.8
-29.44	-21	-13.8	20.56	69	149.8	70.56	159	311.8	120.56	249	473.8	170.56	339	635.8	220.56	429	797.8	262.22	504	932.8
-28.89	-20	-13	21.11	70	150.8	71.11	160	320	121.11	250	482	171.11	340	644	221.11	430	806	262.78	505	941
-28.33	-19	-12.2	21.67	71	151.8	71.67	161	321.8	121.67	251	483.8	171.67	341	645.8	221.67	431	807.8	263.33	506	942.8
-27.78	-18	-11.4	22.22	72	152.8	72.22	162	322.8	122.22	252	484.8	172.22	342	646.8	222.22	432	808.8	263.89	507	943.8
-27.22	-17	-10.6	22.78	73	153.8	72.78	163	323.8	122.78	253	485.8	172.78	343	647.8	222.78	433	809.8	264.44	508	944.8
-26.67	-16	-9.8	23.33	74	154.8	73.33	164	324.8	123.33	254	486.8	173.33	344	648.8	223.33	434	810.8	265	509	945.8
-26.11	-15	-9	23.89	75	155.8	73.89	165	325.8	123.89	255	491	173.89	345	653	223.89	435	815	265.56	510	950
-25.56	-14	-8.2	24.44	76	156.8	74.44	166	326.8	124.44	256	492.8	174.44	346	654.8	224.44	436	816.8	266.11	511	951.8
-25	-13	-7.4	25	77	157.8	75	167	327.8	125	257	494.8	175	347	656.8	225	437	818.8	266.67	512	953.8
-24.44	-12	-6.6	25.56	78	158.8	75.56	168	328.8	125.56	258	496.8	175.56	348	658.8	225.56	438	820.8	267.22	513	955.8
-23.89	-11	-5.8	26.11	79	159.8	76.11	169	329.8	126.11	259	498.8	176.11	349	660.8	226.11	439	822.8	267.78	514	957.8
-23.33	-10	-5	26.67	80	160.8	76.67	170	338	126.67	260	500	176.67	350	662	226.67	440	824	268.33	515	959
-22.78	-9	-4.2	27.22	81	161.8	77.22	171	339.8	127.22	261	501.8	177.22	351	663.8	227.22	441	825.8	268.89	516	960.8
-22.22	-8	-3.4	27.78	82	162.8	77.78	172	340.8	127.78	262	502.8	177.78	352	664.8	227.78	442	826.8	269.44	517	961.8
-21.67	-7	-2.6	28.33	83	163.8	78.33	173	341.8	128.33	263	503.8	178.33	353	665.8	228.33	443	827.8	270	518	964.8
-21.11	-6	-1.8	28.89	84	164.8	78.89	174	342.8	128.89	264	507.2	178.89	354	669.2	228.89	444	831.2	270.56	519	966.2
-20.56	-5	-1	29.44	85	165.8	79.44	175	343.8	129.44	265	509	179.44	355	671	229.44	445	833	271.11	520	968
-20	-4	-0.2	30	86	166.8	80	176	348.8	130	266	510.8	180	356	672.8	230	446	834.8	271.67	521	969.8
-19.44	-3	0.6	30.56	87	167.8	80.56	177	350.8	130.56	267	512.8	180.56	357	674.8	230.56	447	836.8	272.22	522	971.8
-18.89	-2	1.4	31.11	88	168.8	81.11	178	351.8	131.11	268	514.8	181.11	358	675.8	231.11	448	837.8	272.78	523	973.8
-18.33	-1	2.2	31.67	89	169.8	81.67	179	352.8	131.67	269	516.8	181.67	359	678.2	231.67	449	840.2	273.33	524	976.2
-17.78	0	3	32.22	90	170.8	82.22	180	358	132.22	270	518	182.22	360	680	232.22	450	842	273.89	525	977
-17.22	1	3.8	32.78	91	171.8	82.78	181	359.8	132.78	271	519.8	182.78	361	681.8	232.78	451	843.8	274.44	526	978.8
-16.67	2	4.6	33.33	92	172.8	83.33	182	359.8	133.33	272	521.8	183.33	362	683.8	233.33	452	845.8	275	527	980.8
-16.11	3	5.4	33.89	93	173.8	83.89	183	361.8	133.89	273	523.8	183.89	363	685.8	233.89	453	847.8	275.56	528	982.4
-15.56	4	6.2	34.44	94	174.8	84.44	184	363.2	134.44	274	525.2	184.44	364	687.2	234.44	454	849.2	276.11	529	984.2
-15	5	7	35	95	175.8	85	185	365	135	275	527	185	365	689	235	455	851	276.67	530	986
-14.44	6	7.8	35.56	96	176.8	85.56	186	366.8	135.56	276	528.8	185.56	366	690.8	235.56	456	852.8	277.22	531	987.8
-13.89	7	8.6	36.11	97	177.8	86.11	187	368.8	136.11	277	530.8	186.11	367	692.8	236.11	457	854.8	277.78	532	989.8
-13.33	8	9.4	36.67	98	178.8	86.67	188	370.8	136.67	278	532.8	186.67	368	694.8	236.67	458	856.8	278.33	533	991.4
-12.78	9	10.2	37.22	99	179.8	87.22	189	372.2	137.22	279	534.2	187.22	369	696.2	237.22	459	858.2	278.89	534	993.2
-12.22	10	11	37.78	100	180.8	87.78	190	374	137.78	280	536	187.78	370	698	237.78	460	860	279.44	535	995
-11.67	11	11.8	38.33	101	181.8	88.33	191	375.8	138.33	281	537.8	188.33	371	699.8	238.33	461	861.8	280	536	996.8
-11.11	12	12.6	38.89	102	182.8	88.89	192	377.8	138.89	282	539.8	188.89	372	701.6	238.89	462	863.6	280.56	537	998.6
-10.56	13	13.4	39.44	103	183.8	89.44	193	379.4	139.44	283	541.4	189.44	373	703.4	239.44	463	865.4	281.11	538	1000.4
-10	14	14.2	40	104	184.8	90	194	381.2	140	284	543.2	190	374	705.2	240	464	867.2	281.67	539	1002.2
-9.44	15	15	40.56	105	185.8	90.56	195	383	140.56	285	545	190.56	375	707	240.56	465	869	282.22	540	1004
-8.89	16	15.8	41.11	106	186.8	91.11	196	384.8	141.11	286	546.8	191.11	376	708.8	241.11	466	870.8	282.78	541	1005.8
-8.33	17	16.6	41.67	107	187.8	91.67	197	386.8	141.67	287	548.8	191.67	377	710.8	241.67	467	872.8	283.33	542	1007.6
-7.78	18	17.4	42.22	108	188.8	92.22	198	388.4	142.22	288	550.4	192.22	378	712.4	242.22	468	874.4	283.89	543	1009.4
-7.22	19	18.2	42.78	109	189.8	92.78	199	390.2	142.78	289	552.2	192.78	379	714.2	242.78	469	876.2	284.44	544	1011.2
-6.67	20	19	43.33	110	190.8	93.33	200	392	143.33	290	554	193.33	380	716	243.33	470	878	285	545	1013
-6.11	21	19.8	43.89	111	191.8	93.89	201	393.8	143.89	291	555.8	193.89	381	717.8	243.89	471	879.8	285.56	546	1014.8
-5.56	22	20.6	44.44	112	192.8	94.44	202	395.6	144.44	292	557.6	194.44	382	719.6	244.44	472	881.6	286.11	547	1016.6
-5	23	21.4	45	113	193.8	95	203	397.4	145	293	559.4	195	383	721.4	245	473	883.4	286.67	548	1018.4
-4.44	24	22.2	45.56	114	194.8	95.56	204	399.2	145.56	294	561.2	195.56	384	723.2	245.56	474	885.2	287.22	549	1020.2
-3.89	25	23	46.11	115	195.8	96.11	205	401	146.11	295	563	196.11	385	725	246.11	475	887	287.78	550	1022
-3.33	26	23.8	46.67	116	196.8	96.67	206	402.8	146.67	296	564.8	196.67	386	726.8	246.67	476	888.8	288.33	551	1023.8
-2.78	27	24.6	47.22	117	197.8	97.22	207	404.6	147.22	297	566.6	197.22	387	728.6	247.22	477	890.6	288.89	552	1025.6
-2.22	28	25.4	47.78	118	198.8	97.78	208	406.4	147.78	298	568.4	197.78	388	730.4	247.78	478	892.4	289.44	553	1027.4
-1.67	29	26.2	48.33	119	199.8	98.33	209	408.2	148.33	299	570.2	198.33	389	732.2	248.33	479	894.2	290	554	1029.2
-1.11	30	27	48.89	120	200.8	98.89	210	410	148.89	300	572	198.89	390	734	248.89	480	896	290.56	555	1031
-0.56	31	27.8	49.44	121	201.8	99.44	211													

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.